

SF480-L3R

- **Ideal Front-End Filter for Wireless Receivers**
- **Low-Loss, Coupled-Resonator Quartz Design**
- **Simple External Impedance Matching**
- **Rugged, Hermetic, Low Profile TO-39 Package**
- **Complies with Directive 2002/95/EC (RoHS Compliant)**

Absolute Maximum Rating (Ta=25°C)		
Parameter	Rating	Unit
CW RF Power Dissipation	+10	dBm
DC Voltage VDC Between Any Two Pins	±30	VDC
Operating Temperature Range	-20 ~ +70	°C
Case Temperature Range	-45 ~ +85	°C
Soldering Temperature	235	°C



Electronic Characteristics					
Parameter	Sym	Minimum	Typical	Maximum	Unit
Nominal Center Frequency	f_c	NS	480.00	NS	MHz
3dB Passband	BW_3	-	22	-	MHz
Usable Bandwidth	BW	-	4	-	MHz
Insertion Loss 478.00MHz 482.00MHz	IL	-	2.5	4.0	dB
Absolute Rejection					
DC f_c - 50.00MHz	α	36	48	-	dB
f_c - 50.00MHz f_c - 25.00MHz		30	40	-	dB
f_c + 60.00MHz f_c + 200.0MHz		42	56	-	dB
Passband Ripple 478.00MHz 482.00MHz	$\Delta\alpha$	-	-	2.0	dB
Frequency Aging Absolute Value during the First Year	$ f_A $	-	-	10	ppm/yr
DC Insulation Resistance Between any Two Pins	-	1.0	-	-	MΩ
Input / Output Impedance	-	-	50	-	Ω

NS = Not Specified

Notes:

- The frequency f_c is defined as the midpoint between the 3dB frequencies.
- Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50Ω test system with VSWR ≤ 1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_c . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
- Unless noted otherwise, specifications apply over the entire specified operating temperature range.
- Frequency aging is the change in f_c with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
- Turnover temperature, T_0 , is the temperature of maximum (or turnover) frequency, f_0 . The nominal frequency at any case temperature, T_c , may be calculated from: $f = f_0 [1 - \text{FTC} (T_0 - T_c)^2]$.
- The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
- For questions on technology, prices and delivery please contact our sales offices or email to sales@vanlong.com.

Package Dimensions (TO-39)



Electrical Connections

Terminals	Connection
1	Input/Output
2	Output/Input
3	Case Ground

Package Dimensions


Dimensions	Nom. (mm)	Tol. (mm)
A	9.35	±0.10
B	3.40	±0.10
C	3.00	±0.20
D	0.45	±0.10
E	5.08	±0.10
F	2.54	±0.20
G	0.45	

Marking



Ink Marking
Color: Black or Blue

Test Circuit

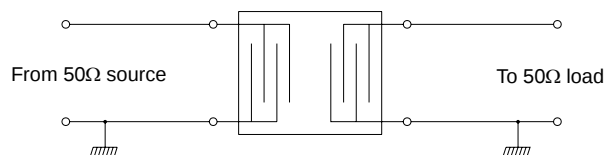

Typical Frequency Response

