



YENYO

SF601G THRU SF605G

Glass Passivated Super Fast Recovery Rectifier

Features


- ★ Fast switching for high efficiency
- ★ Low forward voltage drop
- ★ High current capability
- ★ Low reverse leakage current
- ★ High surge current capability

Mechanical Data

- ★ Case: Molded plastic R-6
- ★ Epoxy: UL 94V-0 rate flame retardant
- ★ Terminals: Solderable per MIL-STD-202 method 208
- ★ Polarity: Color band denotes cathode
- ★ Mounting position: Any
- ★ Weight: 2.1 grams

**Voltage Range 50 to 400 V
Current 6.0 Ampere**

R-6

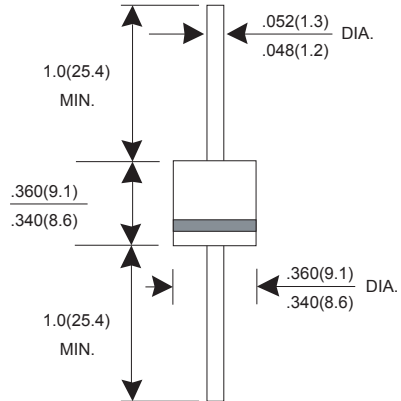

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

PARAMETER	SYMBOL	SF 601G	SF 602G	SF 603G	SF 604G	SF 605G	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	300	400	V
Maximum RMS Voltage	VRMS	35	70	140	210	280	V
Maximum DC Blocking Voltage	VDC	50	100	200	300	400	V
Maximum Average Forward Rectified Current TL=55°C	IF(AV)	6.0					A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	IFSM	150					A
Maximum Instantaneous Forward Voltage @ 6.0 A	VF	0.95			1.3		V
Maximum DC Reverse Current @TJ=25°C At Rated DC Blocking Voltage @TJ=125°C	IR	6.0 250					uA uA
Maximum Reverse Recovery Time (Note 1)	Trr	35					nS
Typical junction Capacitance (Note 2)	CJ	100					pF
Typical Thermal Resistance (Note 3)	RθJA	55					°CW
Operating Junction and Storage Temperature Range	TJ, TSTG	-55 to +150					°C

NOTES : (1) Reverse recovery test conditions IF = 0.5A, IR = 1.0A, Irr = 0.25A.
(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts DC.
(3) Thermal Resistance junction to lead.

RATINGS AND CHARACTERISTIC CURVES SF601G THRU SF605G

FIG.1 - FORWARD CURRENT DERATING CURVE

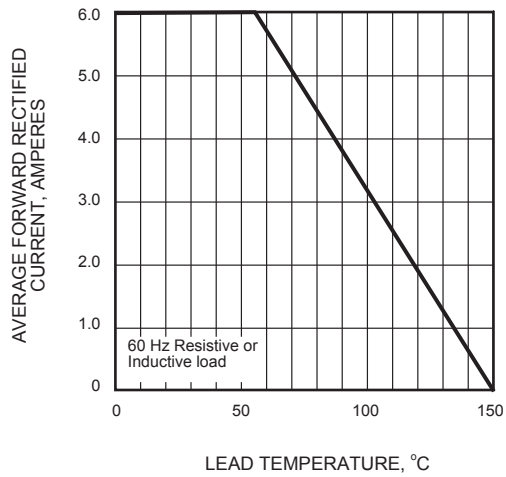


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

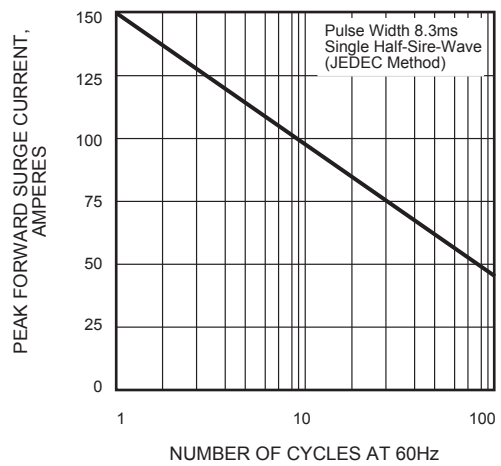


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

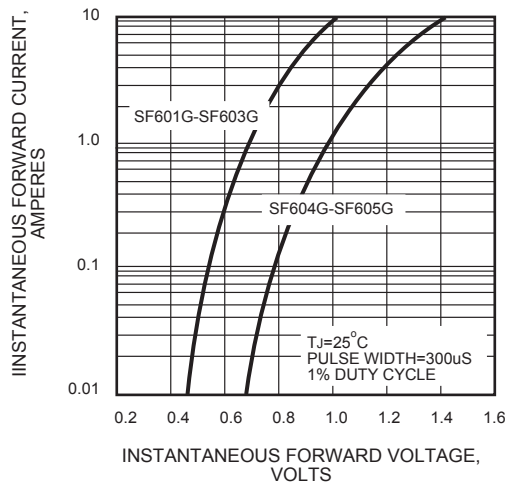


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

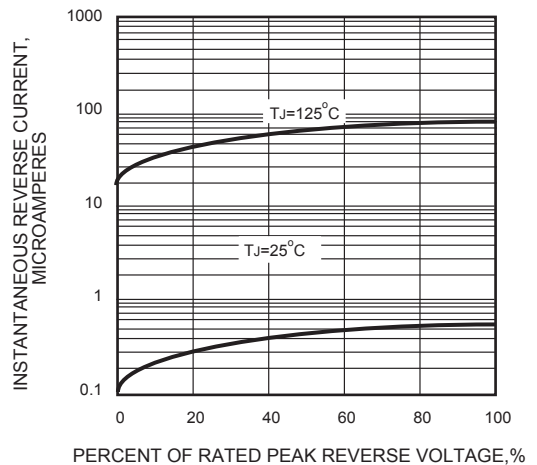


FIG.5 - TYPICAL JUNCTION CAPACITANCE

