



DC COMPONENTS CO., LTD.
RECTIFIER SPECIALISTS

SF81
THRU
SF88

TECHNICAL SPECIFICATIONS OF SUPER FAST RECTIFIER
VOLTAGE RANGE - 50 to 600 Volts **CURRENT - 8.0 Amperes**

FEATURES


- * Low switching noise
- * Low forward voltage drop
- * High current capability
- * Super fast switching speed
- * High reliability
- * Good for switching mode circuit

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- * Mounting position: Any
- * Weight: 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

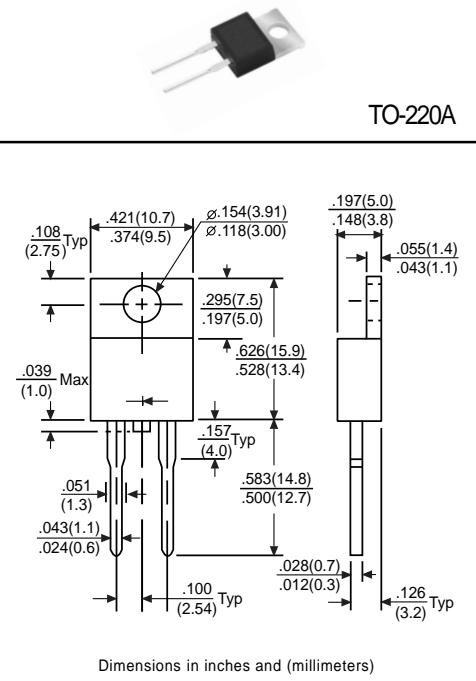

	SYMBOL	SF81	SF82	SF83	SF84	SF85	SF86	SF88	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	Volts
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	420	Volts
Maximum DC Blocking Voltage	V _{dC}	50	100	150	200	300	400	600	Volts
Maximum Average Forward Rectified Current at T _c = 100°C	I _O								Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}								Amps
Maximum Instantaneous Forward Voltage at 8.0A DC	V _F			0.975		1.35		1.70	Volts
Maximum DC Reverse Current @T _c = 25°C	I _R				10				µAmps
at Rated DC Blocking Voltage @T _c = 100°C					500				µAmps
Maximum Reverse Recovery Time (Note 1)	t _{rr}			35		50			nSec
Typical Junction Capacitance (Note 2)	C _J			120		70			pF
Operating and Storage Temperature Range	T _j , T _{stg}			-65 to +150					°C

NOTES: 1. Test Conditions: I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A

2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

3. Suffix "R" for Reverse Polarity

RATING AND CHARACTERISTIC CURVES (SF81 THRU SF88)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

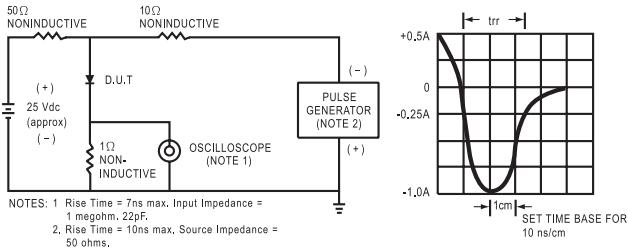


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

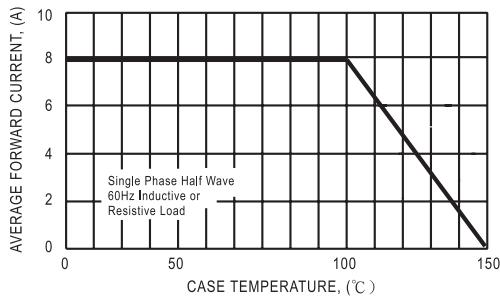


FIG.4 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

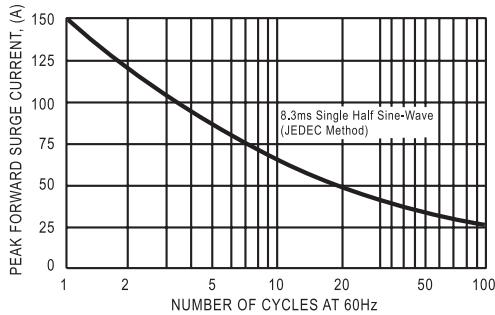


FIG.5 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

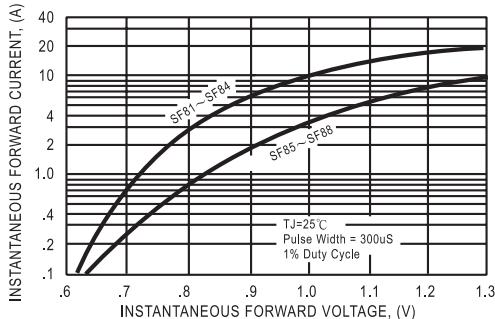


FIG.3 - TYPICAL REVERSE CHARACTERISTICS


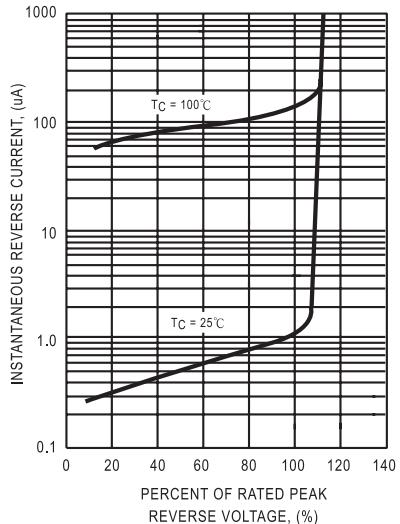


FIG.6 - TYPICAL JUNCTION CAPACITANCE

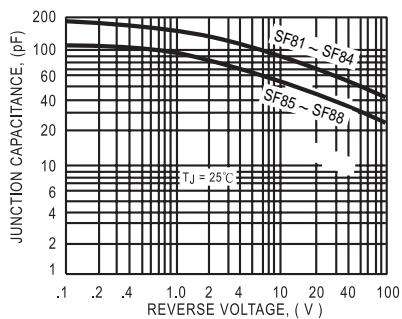

DC COMPONENTS CO., LTD.