

• SFM-1443




FEATURES:

- Super miniature
- Super thin
- Low current


APPLICATIONS:

- Miniature electronic device

DIMENSIONS: (Unit: mm)

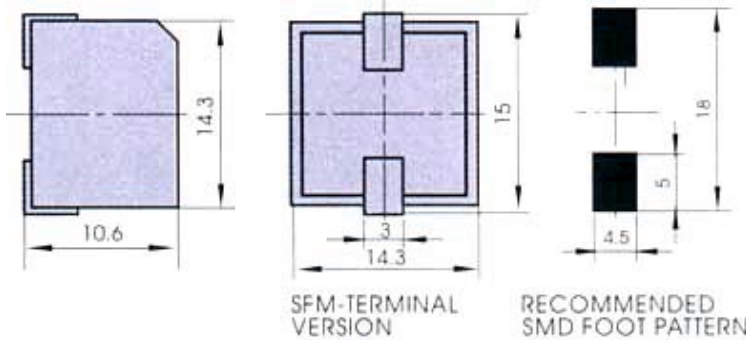

CHARACTERISTICS:

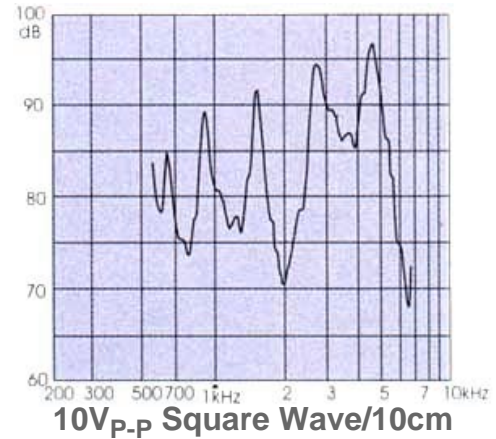

ELECTRICAL SPECIFICATIONS :

| Model No. | SFM-1443 |
|---|--|
| Min. Sound Pressure Level (dB) | 88 /4.3kHz /10V _{p-p} Square Wave /10cm |
| Max. Consumption (mA) | 4 /4.3kHz /10V _{p-p} Square Wave |
| Resonant Frequency (kHz) | 4.3 ± 0.3 |
| Capacitance at 120Hz (nF) | 15 ± 30% |
| Allowable Input Voltage (V _{p-p}) | 20 |
| Operating Temperature (°C) | -20 ~ +85 |
| Weight (g) | 2.4 |
| Case Material/Colour | PPS/Black |


PACKING INFORMATION:

TAPE TYPE INFORMATION:

The design for such tape packing was executed under standard IEC -286-3
The material of the tape is polystyrene in black color. detailed dimensions are as below :

DIMENSIONS OF THE ROLLING PLATE:

The material of the rolling plate is in paper;
The dimensions of the rolling plate are as below:

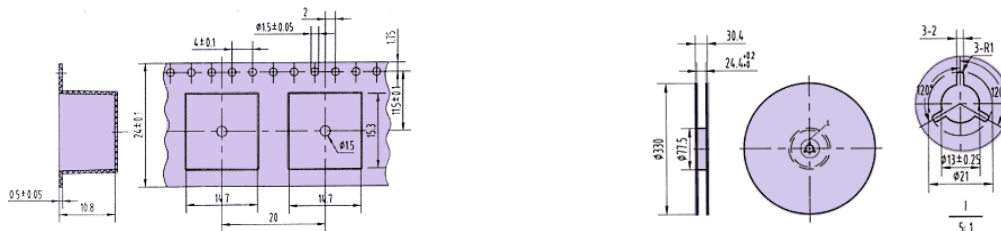

PACKING DIMENSIONS AND QUANTITY:

- The rolling plate is put into a 340X335X35mm inner packing box and is packed with 300 pcs of the transducer per plate
- The dimension of the outer carton is 400X350X350mm containing 10 inner boxes with a total quantity of 3000 pcs of the transducer
- The total gross weight per carton is 13Kgs,while net weight is 7.2Kgs.