



SG12864G (128 DOTS X 64 DOTS)

液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

FEATURES

- ◆ BUILT-IN CONTROLLER (T6963C OR EQUIVALENT)
- ◆ +5 V POWER SUPPLY
- ◆ 1/64 DUTY CYCLE
- ◆ 8-BIT PARALLEL INTERFACE
- ◆ 4.2 V LED FORWARD VOLTAGE

MECHANICAL DATA

ITEM	DIMENSIONS	UNIT
Module Size (W x H x T)	78.0 x 70.0 x 8.8(12.7)	mm
Viewing Area (W x H)	72.0 x 40.0	mm
Active Area (W x H)	66.52 x 33.24	mm
Dot Size (W x H)	0.48 x 0.48	mm
Dot Pitch (W x H)	0.52 x 0.52	mm

INTERFACE PIN CONNECTIONS

NO.	SYMBOL	LEVEL	FUNCTION
1	FG	-	Frame Ground
2	Vss	0V	Power Supply Ground
3	VDD	5V	Power Supply Voltage
4	Vo	-	Contrast Adjustment Voltage
5	/WR	L	Write Singal
6	/RD	L	Read Signal
7	/CE	L	Enable Signal
8	C/D	H/L	H : Data, L : Instruction Code
9	/RST	L	Reset Signal
10~17	DB0~DB7	H/L	Data Bus Line
18	FS	H/L	H : 6*8, L : 8*8 Select Of Columns
19	A	4.2V	LED Power (+)
20	K	0V	LED Power (-)


ABSOLUTE MAXIMUM RATINGS


ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply Voltage For Logic	VDD-Vss	0	-	7	V
Supply Voltage For LCD Drive	VDD-Vo	0	-	14	V
Input Voltage	Vi	Vss	-	VDD	V

ELECTRICAL CHARACTERISTICS

ITEM		SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage For Logic		VDD-Vss	-	4.5	5	5.5	V
Supply Voltage For LCD		VDD-V ₀	VDD=5V Ta=25°C	7.6	8.3	9.2	V
Supply Current		IDD	VDD=5V	-	4.5	10	mA
Input	"HIGH" Level	V _{IH}	-	2.2	-	VDD	V
Voltage	"LOW" Level	V _{IL}	-	-	-	0.6	V
Output	"HIGH" Level	V _{OH}	-	2.4	-	-	V
Voltage	"LOW" Level	V _{OL}	-	-	-	0.4	V

EXTERNAL DIMENSIONS

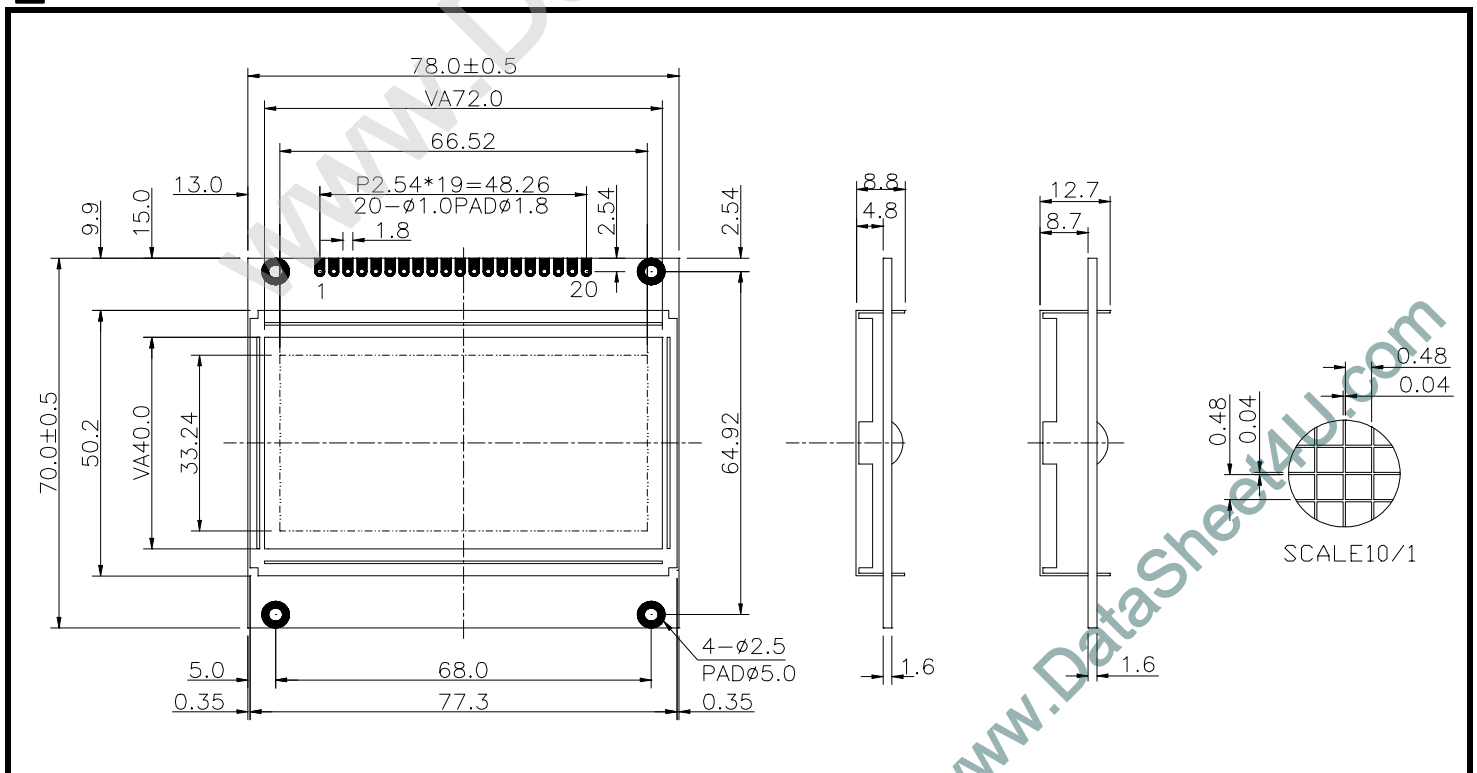




SG12864G (128 DOTS X 64 DOTS)

■ TIMING CHARACTERISTICS

ITEM	SYMBOL	MIN.	MAX.	UNIT.
C/D Setup Time	t_{CDS}	100	-	ns
C/D Hold Time	t_{CDH}	10	-	ns
CE, RD,WR Pulse Width	t_{CE}, t_{RD}, t_{WR}	80	-	ns
Data Setup Time	t_{DS}	80	-	ns
Data Hold Time	t_{DH}	40	-	ns
Access Time	t_{ACC}	-	150	ns
Output Hold Time	t_{OH}	10	50	ns

Bus Timing

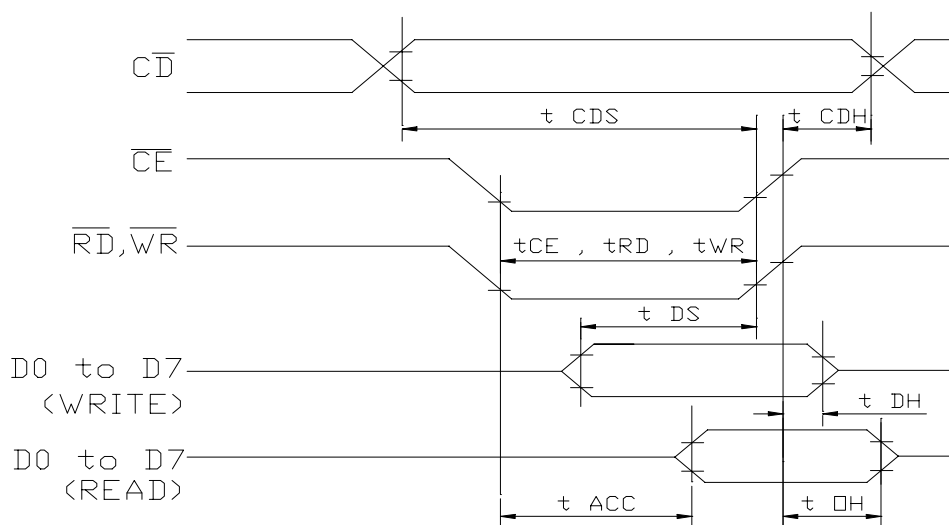

■ BLOCK DIAGRAM

