

GENERAL DESCRIPTION

The SGM2036S is a low input voltage, low noise and low dropout voltage linear regulator. It is capable of supplying 300mA output current with typical dropout voltage of only 190mV. The operating input voltage range is from 1.6V to 5.5V. The output voltage range is from 0.75V to 5.0V in fixed output version. For adjustable output version, the output voltage can be adjusted from 0.8V to 5.0V by using external resistors.

Other features include logic-controlled shutdown mode, short-circuit current limit and thermal shutdown protection. The SGM2036S has automatic discharge function to quickly discharge V_{OUT} in the disabled status.

The SGM2036S is available in Green XTDFN-1×1-4L, SOT-23-5 and SC70-5 packages. It operates over an operating temperature range of -40°C to +125°C.

FEATURES

- **Operating Input Voltage Range: 1.6V to 5.5V**
- **Enable Pin Accept Voltages Higher than the Supply Voltage and up to 5.5V**
- **Fixed Output from 0.75V to 5.0V**
- **Adjustable Output from 0.8V to 5.0V**
- **300mA Output Current**
- **Low Supply Pin Current: 30μA (TYP)**
- **Low Dropout Voltage:
190mV (TYP) at 300mA, $V_{OUT} = 3.0V$**
- **Shutdown Supply Current: 0.05μA (TYP)**
- **Current Limiting and Thermal Protection**
- **Excellent Load and Line Transient Responses**
- **Short Start-Up Time**
- **With Output Automatic Discharge**
- **Stable with Small Case Size Ceramic Capacitors**
- **-40°C to +125°C Operating Temperature Range**
- **Available in Green XTDFN-1×1-4L, SOT-23-5 and SC70-5 Packages**

APPLICATIONS

Modems
Cellular Telephones
PCMCIA Cards
Palmtop Computers
Portable Electronics

PACKAGE/ORDERING INFORMATION

| MODEL | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER | PACKAGE MARKING | PACKING OPTION |
|---------------|---------------------|-----------------------------|----------------------|-----------------|---------------------|
| SGM2036S-0.75 | SOT-23-5 | -40°C to +125°C | SGM2036S-0.75XN5G/TR | 04EXX | Tape and Reel, 3000 |
| SGM2036S-0.8 | SOT-23-5 | -40°C to +125°C | SGM2036S-0.8XN5G/TR | G6ZXX | Tape and Reel, 3000 |
| SGM2036S-0.9 | SOT-23-5 | -40°C to +125°C | SGM2036S-0.9XN5G/TR | G78XX | Tape and Reel, 3000 |
| SGM2036S-1.0 | SOT-23-5 | -40°C to +125°C | SGM2036S-1.0XN5G/TR | G7GXX | Tape and Reel, 3000 |
| SGM2036S-1.05 | SOT-23-5 | -40°C to +125°C | SGM2036S-1.05XN5G/TR | G7HXX | Tape and Reel, 3000 |
| SGM2036S-1.1 | SOT-23-5 | -40°C to +125°C | SGM2036S-1.1XN5G/TR | G7IXX | Tape and Reel, 3000 |
| SGM2036S-1.2 | SOT-23-5 | -40°C to +125°C | SGM2036S-1.2XN5G/TR | G7JXX | Tape and Reel, 3000 |
| SGM2036S-1.3 | SOT-23-5 | -40°C to +125°C | SGM2036S-1.3XN5G/TR | G7KXX | Tape and Reel, 3000 |
| SGM2036S-1.5 | SOT-23-5 | -40°C to +125°C | SGM2036S-1.5XN5G/TR | G7LXX | Tape and Reel, 3000 |
| SGM2036S-1.8 | SOT-23-5 | -40°C to +125°C | SGM2036S-1.8XN5G/TR | G7MXX | Tape and Reel, 3000 |
| SGM2036S-1.85 | SOT-23-5 | -40°C to +125°C | SGM2036S-1.85XN5G/TR | G7NXX | Tape and Reel, 3000 |
| SGM2036S-2.1 | SOT-23-5 | -40°C to +125°C | SGM2036S-2.1XN5G/TR | G7PXX | Tape and Reel, 3000 |
| SGM2036S-2.5 | SOT-23-5 | -40°C to +125°C | SGM2036S-2.5XN5G/TR | G7SXX | Tape and Reel, 3000 |
| SGM2036S-2.8 | SOT-23-5 | -40°C to +125°C | SGM2036S-2.8XN5G/TR | G7VXX | Tape and Reel, 3000 |
| SGM2036S-2.9 | SOT-23-5 | -40°C to +125°C | SGM2036S-2.9XN5G/TR | G7XXX | Tape and Reel, 3000 |
| SGM2036S-3.0 | SOT-23-5 | -40°C to +125°C | SGM2036S-3.0XN5G/TR | G7YXX | Tape and Reel, 3000 |
| SGM2036S-3.3 | SOT-23-5 | -40°C to +125°C | SGM2036S-3.3XN5G/TR | G8EXX | Tape and Reel, 3000 |
| SGM2036S-3.6 | SOT-23-5 | -40°C to +125°C | SGM2036S-3.6XN5G/TR | G8GXX | Tape and Reel, 3000 |
| SGM2036S-4.4 | SOT-23-5 | -40°C to +125°C | SGM2036S-4.4XN5G/TR | G8IXX | Tape and Reel, 3000 |
| SGM2036S-5.0 | SOT-23-5 | -40°C to +125°C | SGM2036S-5.0XN5G/TR | G8JXX | Tape and Reel, 3000 |
| SGM2036S-ADJ | SOT-23-5 | -40°C to +125°C | SGM2036S-ADJXN5G/TR | G5QXX | Tape and Reel, 3000 |

PACKAGE/ORDERING INFORMATION (continued)

| MODEL | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER | PACKAGE MARKING | PACKING OPTION |
|---------------|---------------------|-----------------------------|----------------------|-----------------|---------------------|
| SGM2036S-0.8 | SC70-5 | -40°C to +125°C | SGM2036S-0.8XC5G/TR | G8KXX | Tape and Reel, 3000 |
| SGM2036S-0.9 | SC70-5 | -40°C to +125°C | SGM2036S-0.9XC5G/TR | G8LXX | Tape and Reel, 3000 |
| SGM2036S-1.0 | SC70-5 | -40°C to +125°C | SGM2036S-1.0XC5G/TR | G8MXX | Tape and Reel, 3000 |
| SGM2036S-1.05 | SC70-5 | -40°C to +125°C | SGM2036S-1.05XC5G/TR | G8NXX | Tape and Reel, 3000 |
| SGM2036S-1.1 | SC70-5 | -40°C to +125°C | SGM2036S-1.1XC5G/TR | G8PXX | Tape and Reel, 3000 |
| SGM2036S-1.2 | SC70-5 | -40°C to +125°C | SGM2036S-1.2XC5G/TR | G8QXX | Tape and Reel, 3000 |
| SGM2036S-1.3 | SC70-5 | -40°C to +125°C | SGM2036S-1.3XC5G/TR | G8RXX | Tape and Reel, 3000 |
| SGM2036S-1.5 | SC70-5 | -40°C to +125°C | SGM2036S-1.5XC5G/TR | G8SXX | Tape and Reel, 3000 |
| SGM2036S-1.8 | SC70-5 | -40°C to +125°C | SGM2036S-1.8XC5G/TR | G8TXX | Tape and Reel, 3000 |
| SGM2036S-1.85 | SC70-5 | -40°C to +125°C | SGM2036S-1.85XC5G/TR | G8UXX | Tape and Reel, 3000 |
| SGM2036S-2.1 | SC70-5 | -40°C to +125°C | SGM2036S-2.1XC5G/TR | G8VXX | Tape and Reel, 3000 |
| SGM2036S-2.5 | SC70-5 | -40°C to +125°C | SGM2036S-2.5XC5G/TR | G8YXX | Tape and Reel, 3000 |
| SGM2036S-2.8 | SC70-5 | -40°C to +125°C | SGM2036S-2.8XC5G/TR | G9HXX | Tape and Reel, 3000 |
| SGM2036S-2.9 | SC70-5 | -40°C to +125°C | SGM2036S-2.9XC5G/TR | G9JXX | Tape and Reel, 3000 |
| SGM2036S-3.0 | SC70-5 | -40°C to +125°C | SGM2036S-3.0XC5G/TR | G9KXX | Tape and Reel, 3000 |
| SGM2036S-3.3 | SC70-5 | -40°C to +125°C | SGM2036S-3.3XC5G/TR | G9MXX | Tape and Reel, 3000 |
| SGM2036S-3.6 | SC70-5 | -40°C to +125°C | SGM2036S-3.6XC5G/TR | G9NXX | Tape and Reel, 3000 |
| SGM2036S-4.4 | SC70-5 | -40°C to +125°C | SGM2036S-4.4XC5G/TR | G9QXX | Tape and Reel, 3000 |
| SGM2036S-5.0 | SC70-5 | -40°C to +125°C | SGM2036S-5.0XC5G/TR | G9RXX | Tape and Reel, 3000 |
| SGM2036S-ADJ | SC70-5 | -40°C to +125°C | SGM2036S-ADJXC5G/TR | G5PXX | Tape and Reel, 3000 |


PACKAGE/ORDERING INFORMATION (continued)

| MODEL | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER | PACKAGE MARKING | PACKING OPTION |
|---------------|---------------------|-----------------------------|------------------------|-----------------|----------------------|
| SGM2036S-0.75 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-0.75XXDH4G/TR | 0D | Tape and Reel, 10000 |
| SGM2036S-0.8 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-0.8XXDH4G/TR | 1Y | Tape and Reel, 10000 |
| SGM2036S-0.9 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-0.9XXDH4G/TR | 3K | Tape and Reel, 10000 |
| SGM2036S-1.0 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-1.0XXDH4G/TR | 3L | Tape and Reel, 10000 |
| SGM2036S-1.05 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-1.05XXDH4G/TR | 3M | Tape and Reel, 10000 |
| SGM2036S-1.1 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-1.1XXDH4G/TR | 3N | Tape and Reel, 10000 |
| SGM2036S-1.2 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-1.2XXDH4G/TR | 3P | Tape and Reel, 10000 |
| SGM2036S-1.3 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-1.3XXDH4G/TR | 3Q | Tape and Reel, 10000 |
| SGM2036S-1.35 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-1.35XXDH4G/TR | 3R | Tape and Reel, 10000 |
| SGM2036S-1.5 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-1.5XXDH4G/TR | 3S | Tape and Reel, 10000 |
| SGM2036S-1.6 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-1.6XXDH4G/TR | 24 | Tape and Reel, 10000 |
| SGM2036S-1.8 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-1.8XXDH4G/TR | 3T | Tape and Reel, 10000 |
| SGM2036S-1.85 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-1.85XXDH4G/TR | 3U | Tape and Reel, 10000 |
| SGM2036S-2.1 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-2.1XXDH4G/TR | 3V | Tape and Reel, 10000 |
| SGM2036S-2.5 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-2.5XXDH4G/TR | 3Y | Tape and Reel, 10000 |
| SGM2036S-2.8 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-2.8XXDH4G/TR | 4D | Tape and Reel, 10000 |
| SGM2036S-2.9 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-2.9XXDH4G/TR | 4H | Tape and Reel, 10000 |
| SGM2036S-3.0 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-3.0XXDH4G/TR | 4I | Tape and Reel, 10000 |
| SGM2036S-3.3 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-3.3XXDH4G/TR | 4J | Tape and Reel, 10000 |
| SGM2036S-3.6 | XTDFN-1×1-4L | -40°C to +125°C | SGM2036S-3.6XXDH4G/TR | 2D | Tape and Reel, 10000 |


MARKING INFORMATION

NOTE: XX = Date Code.

SOT-23-5/SC70-5



XTDFN-1×1-4L



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

| | |
|--|--|
| IN, EN to GND | -0.3V to 6V |
| OUT, BP/FB to GND | -0.3V to MIN((V _{IN} + 0.3V), 6V) |
| Power Dissipation, P _D @ T _A = +25°C | |
| XTDFN-1×1-4L | 0.66W |
| SOT-23-5 | 0.7W |
| SC70-5 | 0.66W |
| Package Thermal Resistance | |
| XTDFN-1×1-4L, θ _{JA} | 187.3°C/W |
| XTDFN-1×1-4L, θ _{JB} | 133.2°C/W |
| XTDFN-1×1-4L, θ _{JC} | 150.7°C/W |
| XTDFN-1×1-4L, θ _{JC(BOT)} | 120.1°C/W |
| SOT-23-5, θ _{JA} | 178.2°C/W |
| SOT-23-5, θ _{JB} | 92.6°C/W |
| SOT-23-5, θ _{JC} | 125°C/W |
| SC70-5, θ _{JA} | 188°C/W |
| SC70-5, θ _{JB} | 55.4°C/W |
| SC70-5, θ _{JC} | 103.2°C/W |
| Junction Temperature | +150°C |
| Storage Temperature Range | -65°C to +150°C |
| Lead Temperature (Soldering, 10s) | +260°C |
| ESD Susceptibility | |
| HBM | 5000V |
| CDM | 1000V |

RECOMMENDED OPERATING CONDITIONS

| | |
|--|-----------------|
| Operating Input Voltage Range | 1.6V to 5.5V |
| Enable Input Voltage Range | 0V to 5.5V |
| Input Effective Capacitance, C _{IN} | 0.5μF (MIN) |
| Output Effective Capacitance, C _{OUT} | 0.5μF to 10μF |
| Operating Junction Temperature Range | -40°C to +125°C |

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.



ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

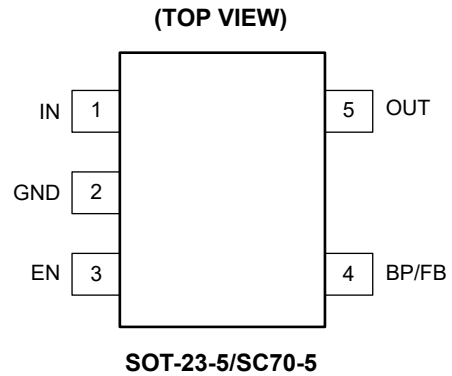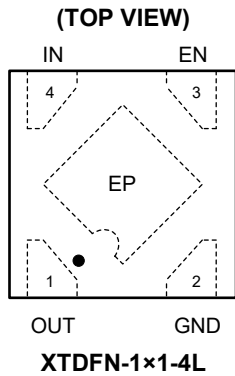

PIN DESCRIPTION

| PIN | | NAME | FUNCTION |
|--------------|---------------------|------|---|
| XTDFN-1x1-4L | SOT-23-5/ SC70-5 | | |
| 1 | 5 | OUT | Regulator Output Pin. It is recommended to use a ceramic capacitor with effective capacitance in the range of 0.5μF to 10μF to ensure stability. This ceramic capacitor should be placed as close as possible to OUT pin. |
| 2 | 2 | GND | Ground. |
| 3 | 3 | EN | Enable Pin. Drive EN high to turn on the regulator. Drive EN low to turn off the regulator. This pin must be pulled high by an external resistor connected to IN pin if EN pin is not used. |
| 4 | 1 | IN | Input Voltage Supply Pin. It is recommended to use a 1μF or larger ceramic capacitor from IN pin to ground to get good power supply decoupling. This ceramic capacitor should be placed as close as possible to IN pin. |
| - | 4 | BP | Reference-Noise Bypass Pin (fixed voltage version only). Bypass with an external capacitor C _{BP} can reduce output noise. The capacitor is recommended to be placed very close to the pin for high PSRR. This pin can also be floating. |
| | | FB | Feedback Voltage Input Pin (adjustable voltage version only). Connect this pin to the midpoint of an external resistor divider to adjust the output voltage. Place the resistors as close as possible to this pin. |
| Exposed Pad | - | - | Exposed Pad. Connect it to a large ground plane to maximize thermal performance. This pad is not an electrical connection point. |

FUNCTIONAL BLOCK DIAGRAMS

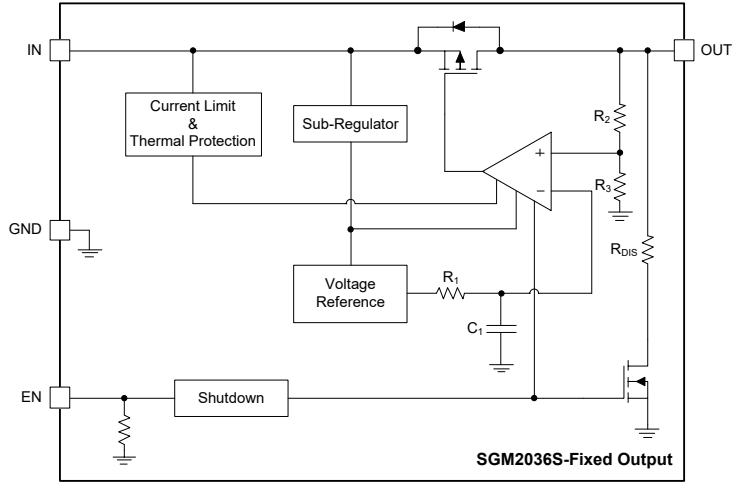


Figure 1. Internal Block Diagram of Fixed Output Voltage (XTDFN-1x1-4L Version)

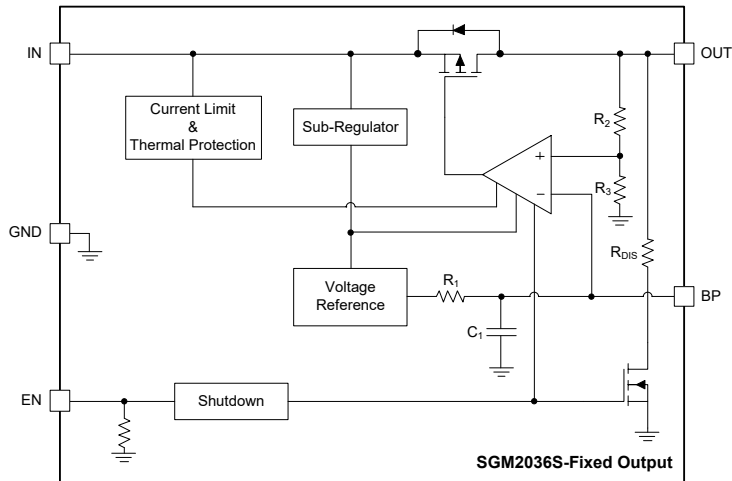


Figure 2. Internal Block Diagram of Fixed Output Voltage (SOT-23-5 and SC70-5 Versions)

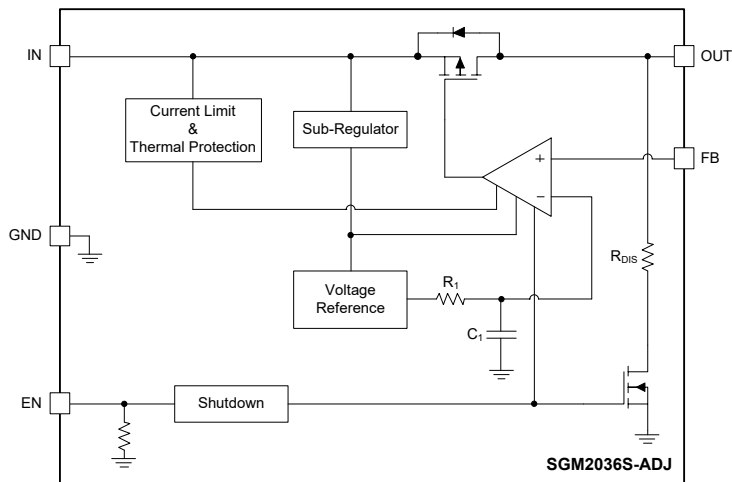


Figure 3. Internal Block Diagram of Adjustable Output Voltage (SOT-23-5 and SC70-5 Versions)

ELECTRICAL CHARACTERISTICS


($V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or 2.5V (whichever is greater), $V_{EN} = V_{IN}$, $T_J = -40^{\circ}C$ to $+125^{\circ}C$, typical values are at $T_J = +25^{\circ}C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS | |
|------------------------------------|---|---|--|-----------------|-----|---------------|-----|
| Input Voltage Range | V_{IN} | | 1.6 | | 5.5 | V | |
| Output Voltage Accuracy | V_{OUT} | $I_{OUT} = 0.1mA$ | $T_J = +25^{\circ}C$ | -2.5 | | 2.5 | % |
| | | | $T_J = -40^{\circ}C$ to $+125^{\circ}C$ | -3 | | 3 | |
| Feedback Voltage | V_{FB} | $I_{OUT} = 0.1mA$, SGM2036S-ADJ | $T_J = +25^{\circ}C$ | 0.78 | 0.8 | 0.82 | V |
| | | | $T_J = -40^{\circ}C$ to $+125^{\circ}C$ | 0.776 | | 0.824 | |
| FB Pin Leakage Current | I_{FB} | $V_{FB} = 0.9V$ | | 1 | 100 | nA | |
| Under-Voltage Lockout Thresholds | V_{UVLO} | V_{IN} rising | | 1.5 | 1.6 | V | |
| | | V_{IN} falling | | 1.3 | | | |
| Line Regulation | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $V_{IN} = 1.6V$ or $(V_{OUT(NOM)} + 0.5V)$ to 5.5V, $I_{OUT} = 0.1mA$, $T_J = +25^{\circ}C$ | | 0.04 | 0.1 | %/V | |
| Load Regulation | ΔV_{OUT} | $I_{OUT} = 0.1mA$ to 300mA, $T_J = +25^{\circ}C$ | | 30 | 45 | mV | |
| | | $I_{OUT} = 0.1mA$ to 300mA, SGM2036S-ADJ, $T_J = +25^{\circ}C$ | | 3 | 10 | | |
| Dropout Voltage | V_{DROP} | $V_{OUT} = V_{OUT(NOM)} - 100mV$, $I_{OUT} = 300mA$, $T_J = +25^{\circ}C$ | $V_{OUT(NOM)} = 0.8V$ | | 880 | 1200 | mV |
| | | | $V_{OUT(NOM)} = 0.9V$ | | 780 | 1100 | |
| | | | $1.0V \leq V_{OUT(NOM)} < 1.1V$ | | 690 | 1000 | |
| | | | $1.1V \leq V_{OUT(NOM)} < 1.2V$ | | 640 | 900 | |
| | | | $1.2V \leq V_{OUT(NOM)} < 1.5V$ | | 560 | 800 | |
| | | | $1.5V \leq V_{OUT(NOM)} < 1.8V$ | | 390 | 550 | |
| | | | $1.8V \leq V_{OUT(NOM)} < 2.1V$ | | 320 | 420 | |
| | | | $2.1V \leq V_{OUT(NOM)} < 2.5V$ | | 260 | 340 | |
| | | | $2.5V \leq V_{OUT(NOM)} < 3.0V$ | | 215 | 280 | |
| $3.0V \leq V_{OUT(NOM)} \leq 5.0V$ | | 190 | 250 | | | | |
| Output Current Limit | I_{LIMIT} | | 350 | 800 | | mA | |
| Short-Circuit Current | I_{SHORT} | $V_{OUT} = 0V$ | | 380 | | mA | |
| Supply Pin Current | I_Q | No load, $T_J = +25^{\circ}C$ | | 30 | 45 | μA | |
| Shutdown Supply Current | I_{SHDN} | $V_{EN} = 0V$ | | 0.05 | 1 | μA | |
| EN Input Thresholds | V_{IH} | $V_{IN} = 1.6V$ to 5.5V | | 1.5 | | V | |
| | V_{IL} | | | | | | 0.4 |
| EN Input Bias Current | I_{BH} | $V_{EN} = 5.5V$ | | 0.8 | 1.5 | μA | |
| | I_{BL} | $V_{EN} = 0V$ | | 0.01 | 1 | | |
| Output Discharge Resistance | R_{DIS} | $V_{EN} = 0V$, $V_{IN} = 4V$, $V_{OUT} = 0.3V$ | | 75 | | Ω | |
| Start-Up Time | t_{STR} | $C_{OUT} = 1\mu F$, $I_{OUT} = 1mA$, $V_{OUT(NOM)} = 1.8V$, from assertion of V_{EN} to $V_{OUT} = 90\% \times V_{OUT(NOM)}$ | | 100 | | μs | |
| Power Supply Rejection Ratio | PSRR | $C_{BP} = 0nF$, $C_{OUT} = 1\mu F$, $I_{OUT} = 30mA$, $V_{IN} = 2.8V$, $V_{OUT(NOM)} = 1.8V$, $\Delta V_{RIPPLE} = 0.2V_{P-P}$ | $f = 217Hz$ | 82 | | dB | |
| | | | $f = 1kHz$ | 76 | | | |
| | | | $C_{BP} = 10nF$, $C_{OUT} = 1\mu F$, $I_{OUT} = 30mA$, $V_{IN} = 2.8V$, $V_{OUT(NOM)} = 1.8V$, $\Delta V_{RIPPLE} = 0.2V_{P-P}$ | $f = 217Hz$ | 92 | | |
| | | | $f = 1kHz$ | 86 | | | |
| Output Voltage Noise | e_n | $C_{BP} = 0nF$, $C_{OUT} = 1\mu F$, $V_{OUT(NOM)} = 1.8V$, $f = 10Hz$ to 100kHz | $I_{OUT} = 0mA$ | 18 | | μV_{RMS} | |
| | | | $I_{OUT} = 30mA$ | 100 | | | |
| | | | $C_{BP} = 10nF$, $C_{OUT} = 1\mu F$, $V_{OUT(NOM)} = 1.8V$, $f = 10Hz$ to 100kHz | $I_{OUT} = 0mA$ | 13 | | |
| | | | $I_{OUT} = 30mA$ | 60 | | | |
| Thermal Shutdown Temperature | T_{SHDN} | | | 160 | | $^{\circ}C$ | |
| Thermal Shutdown Hysteresis | ΔT_{SHDN} | | | 20 | | $^{\circ}C$ | |

TYPICAL PERFORMANCE CHARACTERISTICS


$T_J = +25^\circ\text{C}$, $V_{IN} = (V_{OUT(NOM)} + 0.5\text{V})$ or 2.5V (whichever is greater), $V_{EN} = V_{IN}$, $C_{IN} = C_{OUT} = 1\mu\text{F}$, $C_{BP} = 0\text{nF}$, unless otherwise noted.

Turn On Speed with EN Pin

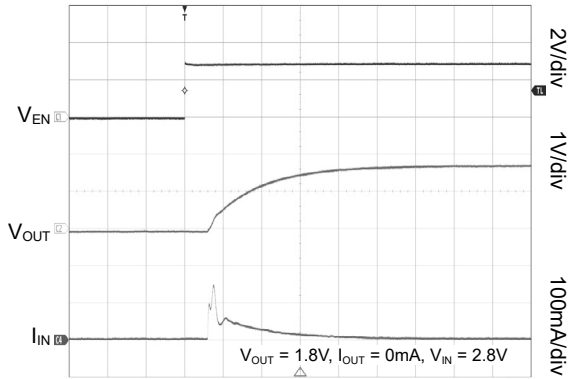


Time (20 μs /div)

Turn On Speed with EN Pin

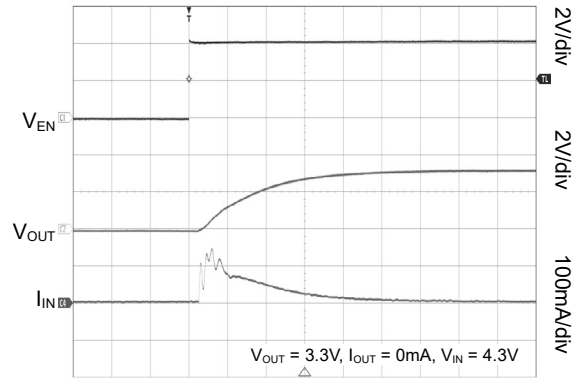


Time (20 μs /div)

Turn Off Speed with EN Pin

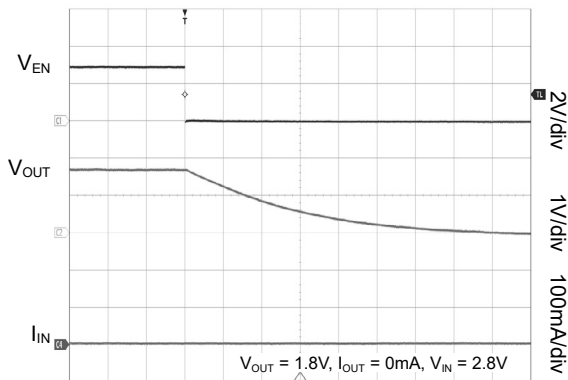


Time (40 μs /div)

Turn Off Speed with EN Pin

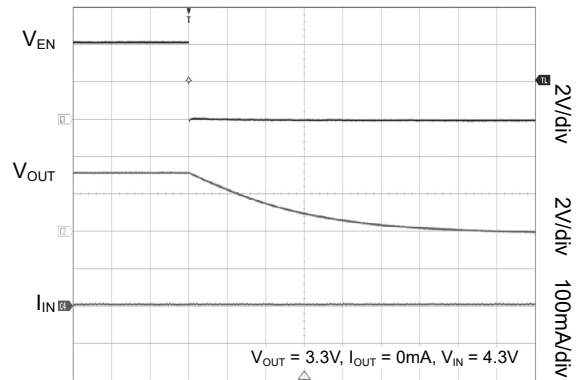


Time (40 μs /div)

Line Transient Response

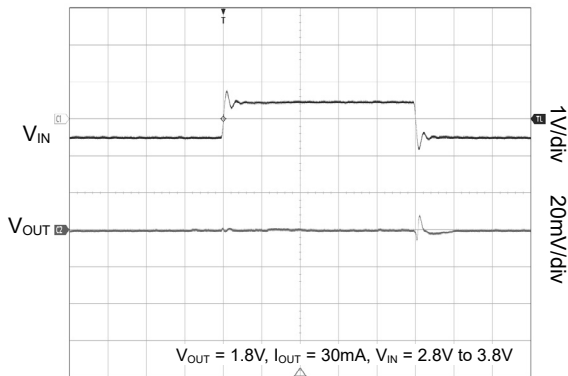

Time (40 μs /div)

Line Transient Response

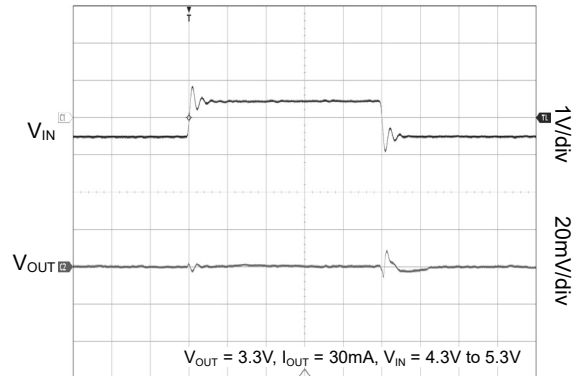


Time (40 μs /div)


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = +25^\circ\text{C}$, $V_{IN} = (V_{OUT(NOM)} + 0.5\text{V})$ or 2.5V (whichever is greater), $V_{EN} = V_{IN}$, $C_{IN} = C_{OUT} = 1\mu\text{F}$, $C_{BP} = 0\text{nF}$, unless otherwise noted.


Load Transient Response

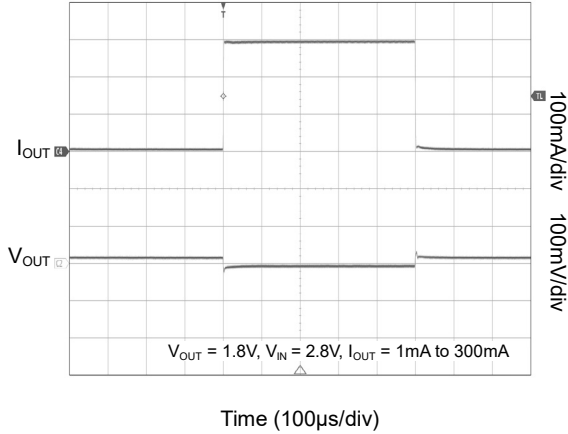


Load Transient Response

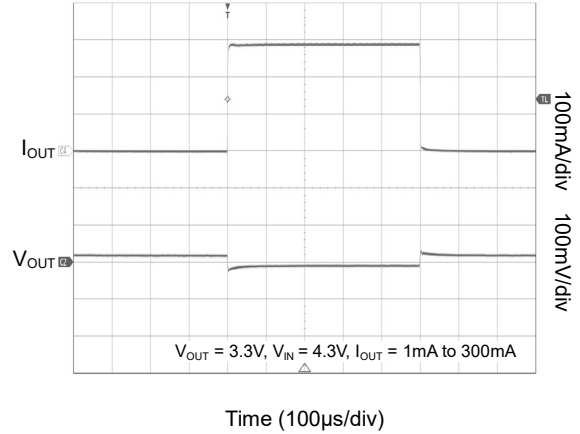


Load Transient Response

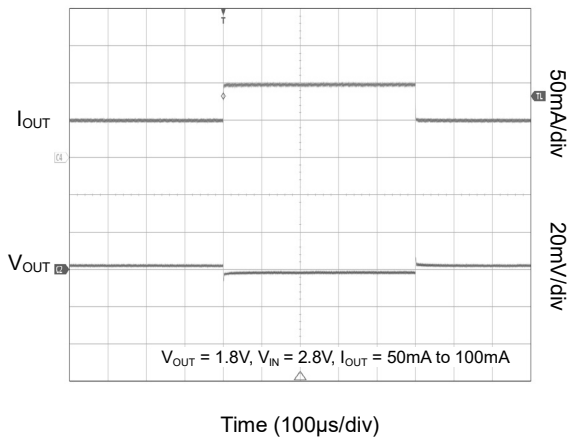


Load Transient Response

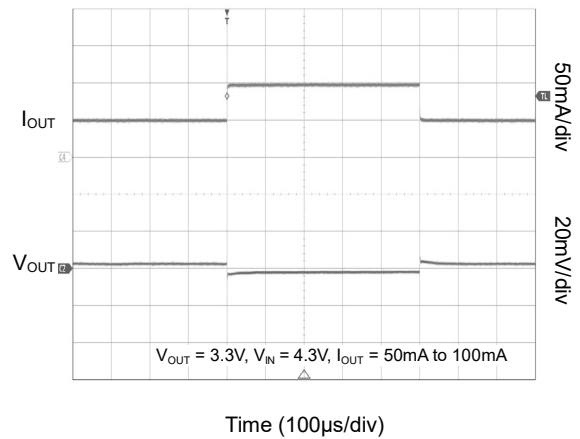

Power Supply Rejection Ratio vs. Frequency






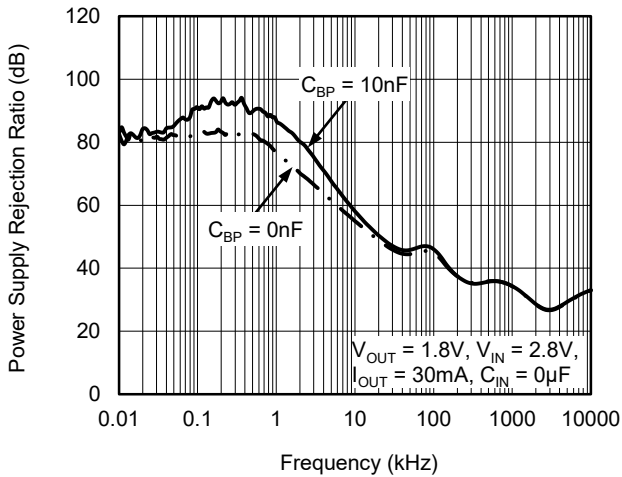


Power Supply Rejection Ratio vs. Frequency

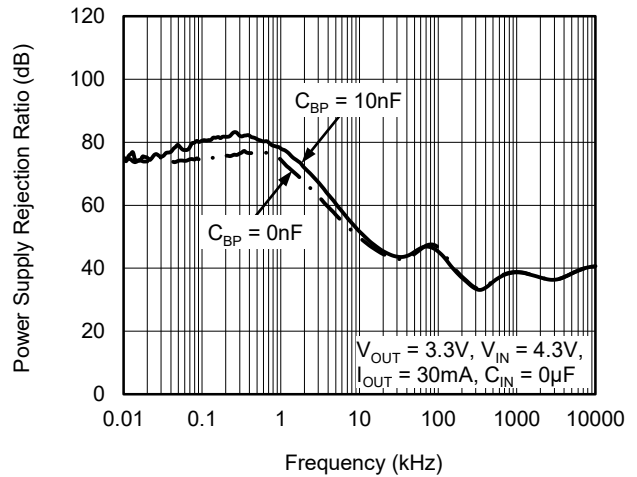







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = +25^\circ\text{C}$, $V_{IN} = (V_{OUT(NOM)} + 0.5\text{V})$ or 2.5V (whichever is greater), $V_{EN} = V_{IN}$, $C_{IN} = C_{OUT} = 1\mu\text{F}$, $C_{BP} = 0\text{nF}$, unless otherwise noted.

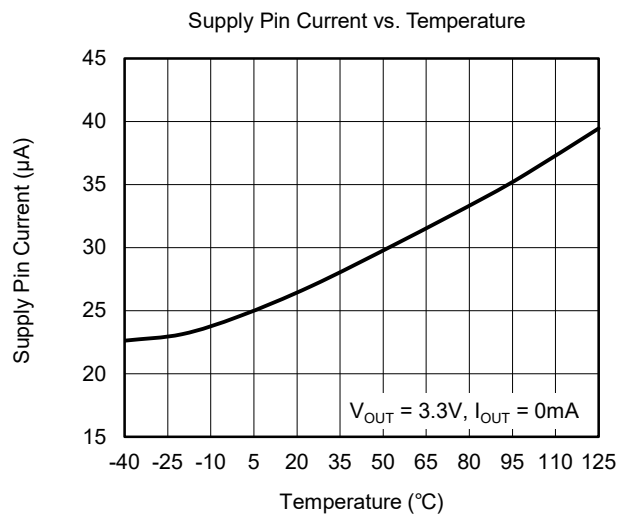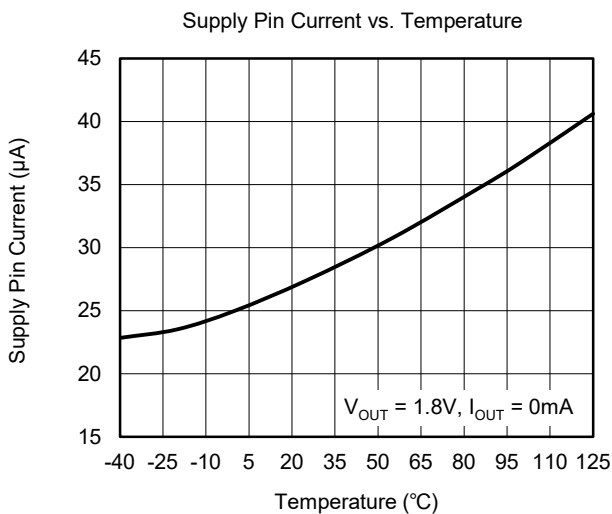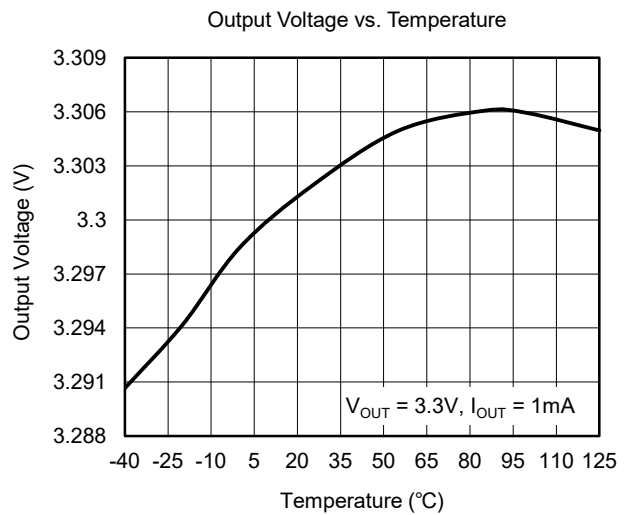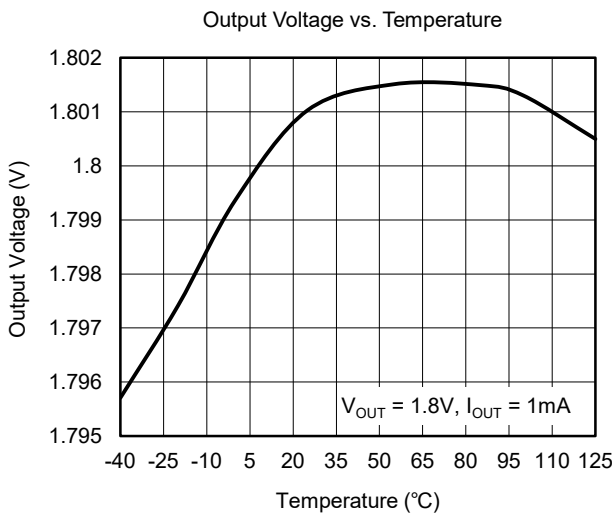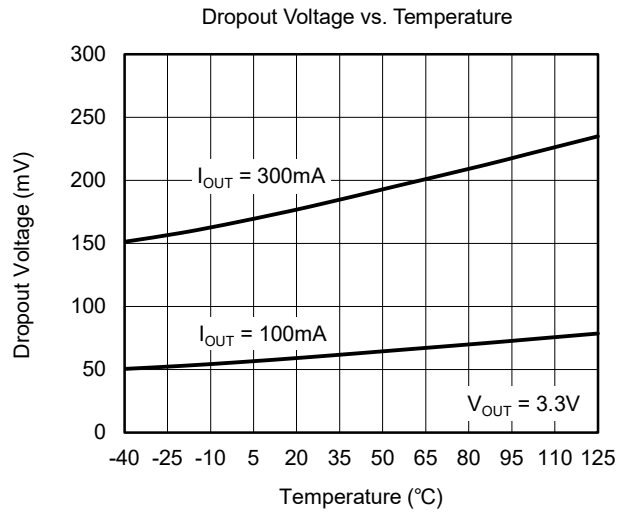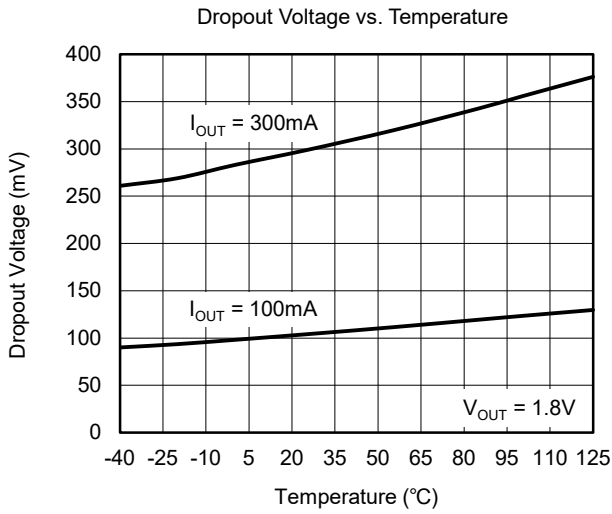

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = +25^\circ\text{C}$, $V_{IN} = (V_{OUT(NOM)} + 0.5\text{V})$ or 2.5V (whichever is greater), $V_{EN} = V_{IN}$, $C_{IN} = C_{OUT} = 1\mu\text{F}$, $C_{BP} = 0\text{nF}$, unless otherwise noted.

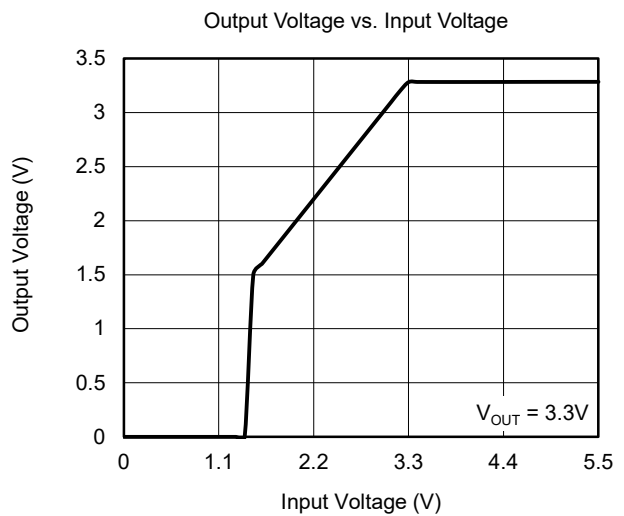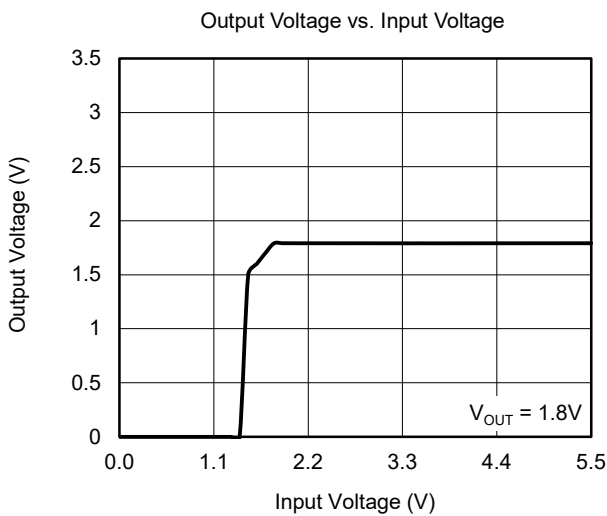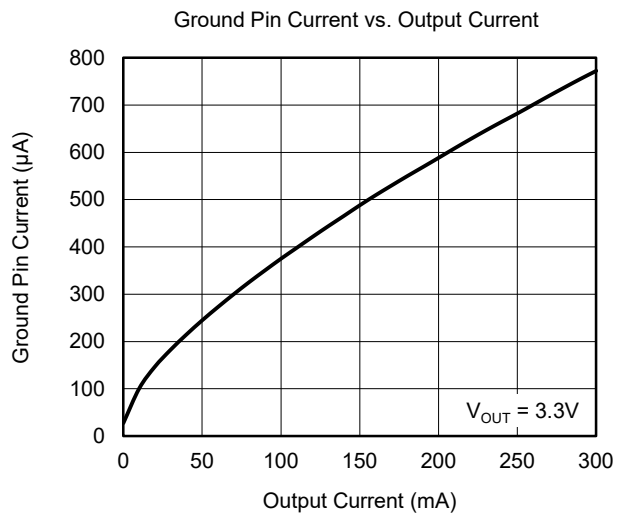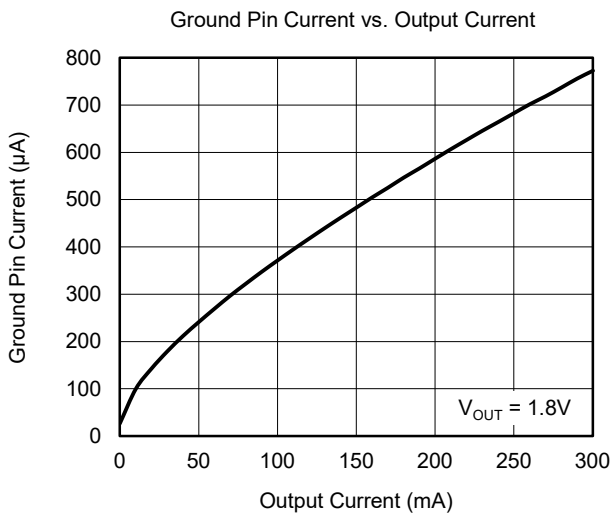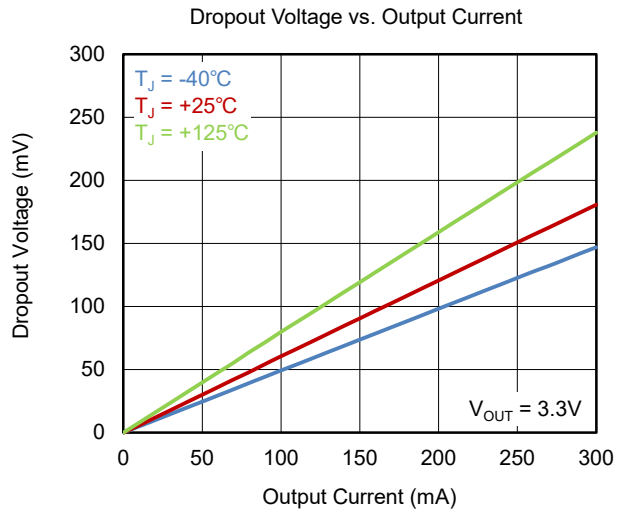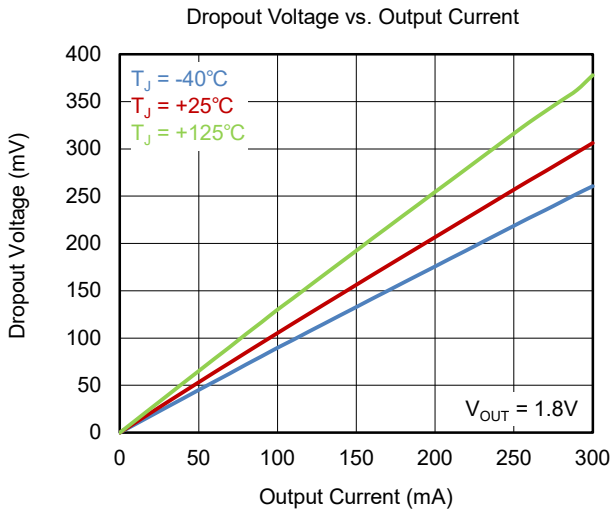

TYPICAL APPLICATION CIRCUITS

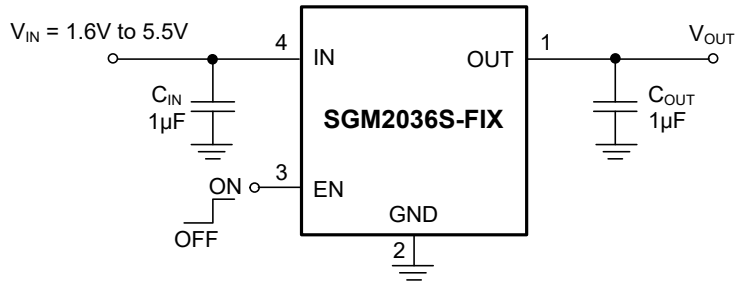


Figure 4. Fixed Output Version (XTDFN-1x1-4L)


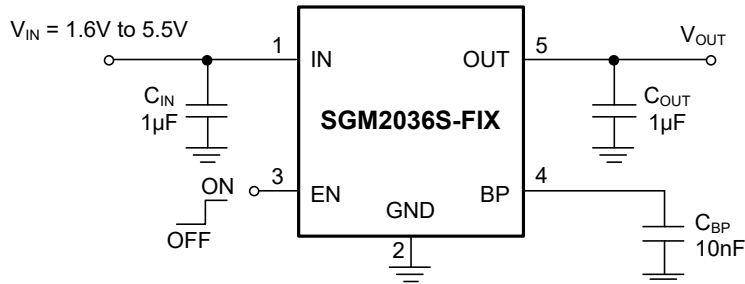


Figure 5. Fixed Output Version (SOT-23-5/SC70-5)

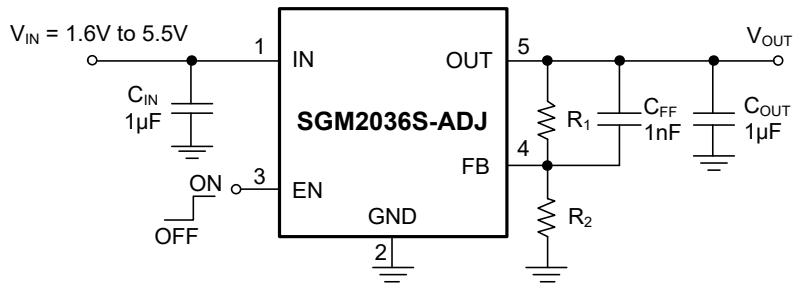

$$R_1 = R_2 \times \left(\frac{V_{OUT}}{0.8V} - 1 \right)$$

Figure 6. Adjustable Output Version (SOT-23-5/SC70-5)

APPLICATION INFORMATION

The SGM2036S is a low input voltage, low noise and low dropout LDO and provides 300mA output current. These features make the device a reliable solution to solve many challenging problems in the generation of clean and accurate power supply. The high performance also makes the SGM2036S useful in a variety of applications. The SGM2036S provides the protection functions for output overload, output short-circuit condition and overheating.

The SGM2036S provides an EN pin as an external chip enable control to enable/disable the device. When the regulator is in shutdown state, the shutdown current consumes as low as 0.05μA (TYP).

Input Capacitor Selection (C_{IN})

The input decoupling capacitor should be placed as close as possible to the IN pin to ensure the device stability. 1μF or larger X7R or X5R ceramic capacitor is selected to get good dynamic performance.

When V_{IN} is required to provide large current instantaneously, a large effective input capacitor is required. Multiple input capacitors can limit the input tracking inductance. Adding more input capacitors is available to restrict the ringing and to keep it below the device absolute maximum ratings. For C_{OUT} with larger capacitance, it is recommended to choose the larger capacitance C_{IN} .

Output Capacitor Selection (C_{OUT})

The output capacitor should be placed as close as possible to the OUT pin. 1μF or larger X7R or X5R ceramic capacitor is selected to get good dynamic performance. The minimum effective capacitance of C_{OUT} that SGM2036S can remain stable is 0.5μF. For ceramic capacitor, temperature, DC bias and package size will change the effective capacitance, so enough margin of C_{OUT} must be considered in design. Additionally, C_{OUT} with larger capacitance and lower ESR will help increase the high frequency PSRR and improve the load transient response.

Adjustable Regulator

The output voltage of the SGM2036S-ADJ can be adjusted from 0.8V to 5.0V. The FB pin will be

connected to two external resistors as shown in Figure 7, the output voltage is determined by the following equation:

$$V_{OUT} = V_{FB} \times \left(1 + \frac{R_1}{R_2} \right) \quad (1)$$

where:

V_{OUT} is output voltage and V_{FB} is the internal voltage reference, $V_{FB} = 0.8V$.

One parallel capacitor (C_{FF}) with R_1 can be used to improve the feedback loop stability and PSRR, increase the transient response and reduce the output noise. Use $R_2 = 160k\Omega$ to maintain a 5μA minimum load.

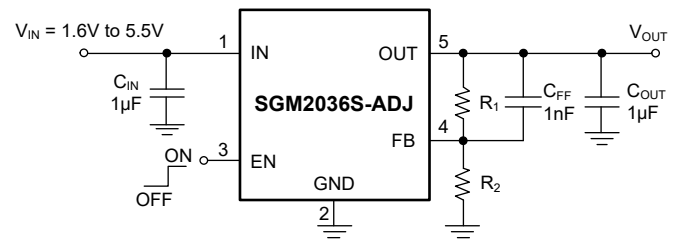


Figure 7. Adjustable Output Voltage Application

Enable Operation

The EN pin of the SGM2036S is used to enable/disable its device and to deactivate/activate the output automatic discharge function.

When the EN pin voltage is lower than 0.4V, the device is in shutdown state. There is no current flowing from IN to OUT pins. In this state, the automatic discharge transistor is active to discharge the output voltage through a 75Ω (TYP) resistor.

When the EN pin voltage is higher than 1.5V, the device is in active state. The output voltage is regulated to the expected value and the automatic discharge transistor is turned off.

The EN pin is pulled down by an internal pull-down resistor when the EN pin is floated. This current source will ensure the SGM2036S in shutdown state and reduce the power dissipation in system.

APPLICATION INFORMATION (continued)

Reverse Current Protection

The power transistor has an inherent body diode. This body diode will be forward biased when $V_{OUT} > (V_{IN} + 0.3V)$. When $V_{OUT} > (V_{IN} + 0.3V)$, the reverse current flowing from the OUT pin to the IN pin will damage the SGM2036S. If $V_{OUT} > (V_{IN} + 0.3V)$ event would happen in system, one external Schottky diode will be added between OUT pin and IN pin in circuit design to protect the SGM2036S.

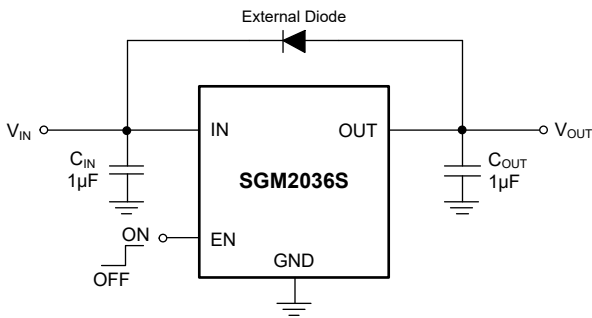


Figure 8. Reverse Protection Reference Design

Negatively Biased Output

When the output voltage is negative, the chip may not start up due to parasitic effects. Ensure that the output is greater than -0.3V under all conditions. If negatively biased output is excessive and expected in the application, a Schottky diode can be added between the OUT pin and GND pin.

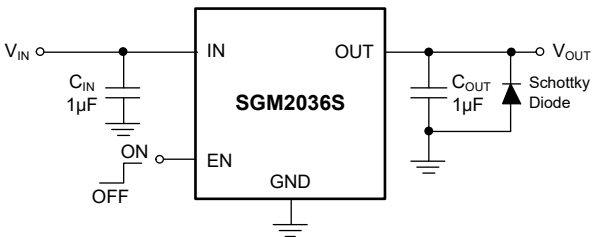


Figure 9. Negatively Biased Output Application

Output Current Limit and Short-Circuit Protection

When overload events happen, the output current is internally limited to 800mA (TYP). When the OUT pin is shorted to ground, the short-circuit protection will limit the output current to 380mA (TYP).

Thermal Shutdown

When the die temperature exceeds the threshold value of thermal shutdown, the SGM2036S will be in shutdown state and it will remain in this state until the die temperature decreases to +140°C.

Power Dissipation (P_D)

Power dissipation (P_D) of the SGM2036S can be calculated by the equation $P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$. The maximum allowable power dissipation (P_{D(MAX)}) of the SGM2036S is affected by many factors, including the difference between junction temperature and ambient temperature (T_{J(MAX)} - T_A), package thermal resistance from the junction to the ambient environment (θ_{JA}), the rate of ambient airflow and PCB layout. P_{D(MAX)} can be approximated by the following equation:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA} \quad (2)$$


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


| NOVEMBER 2023 – REV.A.3 to REV.A.4 | Page |
|--|-------------|
| Updated Features..... | 1 |
| Updated Electrical Characteristics section..... | 8 |
| NOVEMBER 2023 – REV.A.2 to REV.A.3 | Page |
| Updated Power Dissipation..... | 5 |
| Updated Package Thermal Resistance..... | 5 |
| MAY 2023 – REV.A.1 to REV.A.2 | Page |
| Updated Pin Description..... | 6 |
| APRIL 2023 – REV.A to REV.A.1 | Page |
| Added SGM2036S-3.6XN5G/TR to Package/Ordering Information section..... | 2 |
| Added SGM2036S-3.6XC5G/TR to Package/Ordering Information section..... | 3 |
| Added SGM2036S-3.6XXDH4G/TR to Package/Ordering Information section..... | 4 |
| Added SGM2036S-1.6XXDH4G/TR to Package/Ordering Information section..... | 4 |
| Changes from Original (NOVEMBER 2022) to REV.A | Page |
| Changed from product preview to production data..... | All |

PACKAGE OUTLINE DIMENSIONS


XTDFN-1x1-4L




TOP VIEW

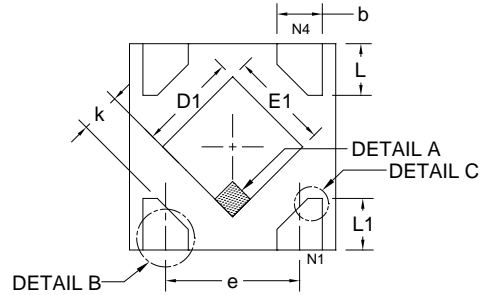


BOTTOM VIEW

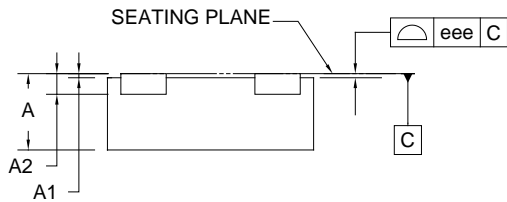

SIDE VIEW

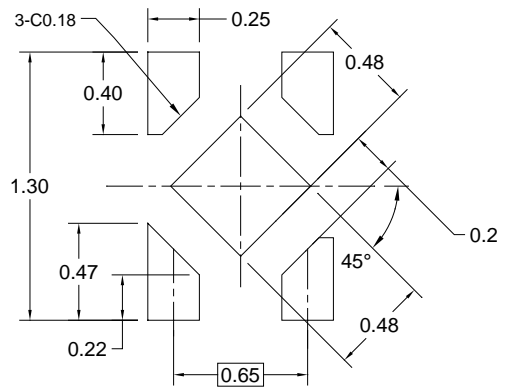

RECOMMENDED LAND PATTERN (Unit: mm)

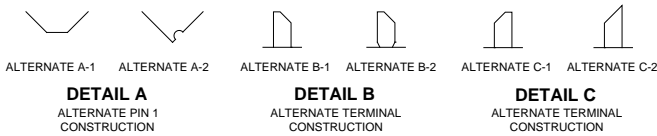



| Symbol | Dimensions in Millimeters | | |
|--------|---------------------------|-------|-------|
| | MIN | MOD | MAX |
| A | 0.340 | 0.370 | 0.400 |
| A1 | 0.000 | 0.020 | 0.050 |
| A2 | 0.100 REF | | |
| b | 0.170 | - | 0.300 |
| D | 0.950 | 1.000 | 1.050 |
| E | 0.950 | 1.000 | 1.050 |
| D1 | 0.430 | 0.480 | 0.530 |
| E1 | 0.430 | 0.480 | 0.530 |
| L | 0.200 | 0.250 | 0.300 |
| L1 | 0.200 | - | 0.370 |
| e | 0.650 BSC | | |
| k | 0.150 | - | - |
| eee | - | 0.050 | - |

NOTE: This drawing is subject to change without notice.



PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

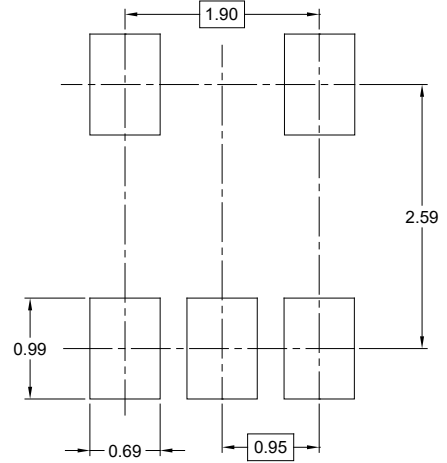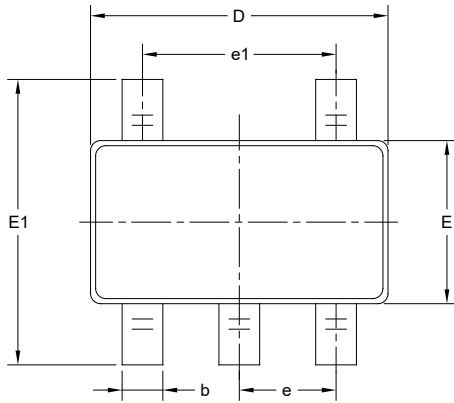

RECOMMENDED LAND PATTERN (Unit: mm)

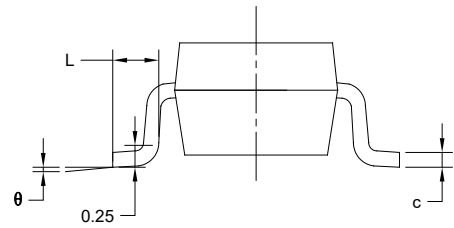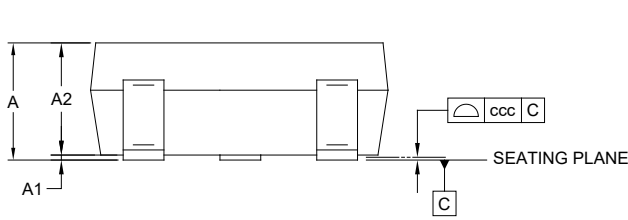



| Symbol | Dimensions In Millimeters | | |
|----------|---------------------------|-----|-------|
| | MIN | MOD | MAX |
| A | - | - | 1.450 |
| A1 | 0.000 | - | 0.150 |
| A2 | 0.900 | - | 1.300 |
| b | 0.300 | - | 0.500 |
| c | 0.080 | - | 0.220 |
| D | 2.750 | - | 3.050 |
| E | 1.450 | - | 1.750 |
| E1 | 2.600 | - | 3.000 |
| e | 0.950 BSC | | |
| e1 | 1.900 BSC | | |
| L | 0.300 | - | 0.600 |
| θ | 0° | - | 8° |
| ccc | 0.100 | | |

NOTES:



1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.

PACKAGE OUTLINE DIMENSIONS

SC70-5

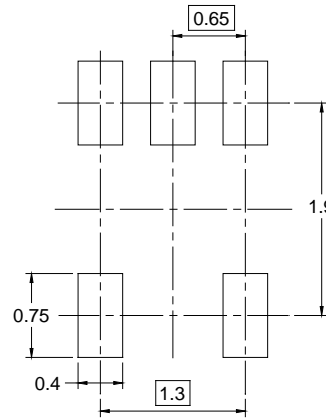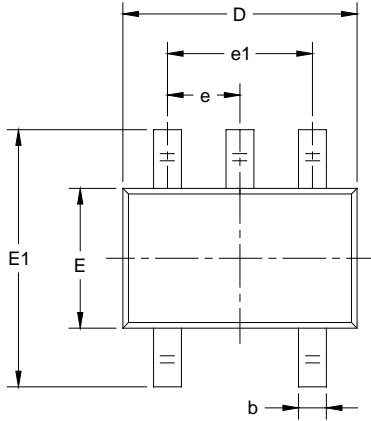

RECOMMENDED LAND PATTERN (Unit: mm)

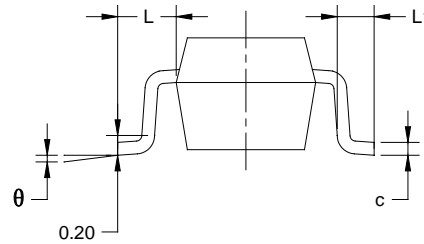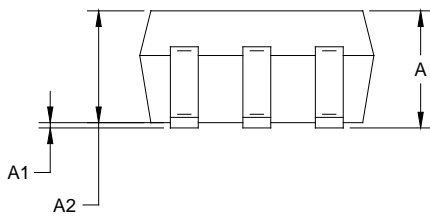

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|----------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.800 | 1.100 | 0.031 | 0.043 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.800 | 1.000 | 0.031 | 0.039 |
| b | 0.150 | 0.350 | 0.006 | 0.014 |
| c | 0.080 | 0.220 | 0.003 | 0.009 |
| D | 2.000 | 2.200 | 0.079 | 0.087 |
| E | 1.150 | 1.350 | 0.045 | 0.053 |
| E1 | 2.150 | 2.450 | 0.085 | 0.096 |
| e | 0.65 TYP | | 0.026 TYP | |
| e1 | 1.300 BSC | | 0.051 BSC | |
| L | 0.525 REF | | 0.021 REF | |
| L1 | 0.260 | 0.460 | 0.010 | 0.018 |
| θ | 0° | 8° | 0° | 8° |

NOTES:

1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.

PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|--------------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| XTDFN-1×1-4L | 7" | 9.5 | 1.16 | 1.16 | 0.50 | 4.0 | 2.0 | 2.0 | 8.0 | Q1 |
| SOT-23-5 | 7" | 9.5 | 3.20 | 3.20 | 1.40 | 4.0 | 4.0 | 2.0 | 8.0 | Q3 |
| SC70-5 | 7" | 9.5 | 2.25 | 2.55 | 1.20 | 4.0 | 4.0 | 2.0 | 8.0 | Q3 |

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

| Reel Type | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-------------|-------------|------------|-------------|--------------|
| 7" (Option) | 368 | 227 | 224 | 8 |
| 7" | 442 | 410 | 224 | 18 |

DD0002