



SGM8582

Single-Supply, Dual Rail-to-Rail I/O Precision Operational Amplifier

GENERAL DESCRIPTION

The SGM8582 is a dual, precision operational amplifier which can operate from 2.5V to 5.5V single supply. The device provides rail-to-rail input and output operation.

The SGM8582 offers a low offset voltage less than 100 μ V and an ultra-low bias current of 15pA. The combination of characteristics makes the SGM8582 a good choice for temperature measurements, pressure and position sensors, strain gauge amplifiers and medical instrumentation, or any other 2.5V to 5.5V applications requiring precision and long-term stability.

The SGM8582 is available in Green SOIC-8 and MSOP-8 packages. It is specified over the extended industrial temperature range (-40°C to +125°C).

FEATURES

- **Low Offset Voltage:** 100 μ V (MAX)
- **Ultra-Low Input Bias Current:** 15pA (TYP)
- **Large-Signal Voltage Gain:** 145dB (TYP) at 5V
- **PSRR:** 125dB (TYP)
- **CMRR:** 95dB (TYP)
- **Overload Recovery Time:** 70 μ s (at $V_S = 5V$)
- **Rail-to-Rail Input and Output**
- **Supply Voltage Range:** 2.5V to 5.5V
- **Low Supply Current:** 430 μ A/Amplifier (TYP)
- **No External Capacitors Required**
- **-40°C to +125°C Operating Temperature Range**
- **Available in Green SOIC-8 and MSOP-8 Packages**

APPLICATIONS

Pressure Sensors
Temperature Measurements
Precision Current Sensing
Electronic Scales
Strain Gauge Amplifiers
Handheld Test Equipment
Thermocouple Amplifiers
Medical Instrumentation

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM8582	SOIC-8	-40°C to +125°C	SGM8582XS8G/TR	SGM8582XS8 XXXXX	Tape and Reel, 2500
	MSOP-8	-40°C to +125°C	SGM8582XMS8G/TR	SGM8582 XMS8 XXXXX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XXXXX = Date Code and Vendor Code.

XXXXX

Vendor Code
Date Code - Week
Date Code - Year

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage 6V
 Input Voltage Range $-V_S$ to $(+V_S) + 0.1V$
 Differential Input Voltage Range -5V to 5V
 Junction Temperature +150°C
 Storage Temperature Range -65°C to +150°C
 Lead Temperature (Soldering, 10s) +260°C
 ESD Susceptibility
 HBM (SOIC-8) 8000V
 HBM (MSOP-8) 7000V
 MM 400V

RECOMMENDED OPERATING CONDITIONS

Operating Temperature Range -40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION


This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions.

Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

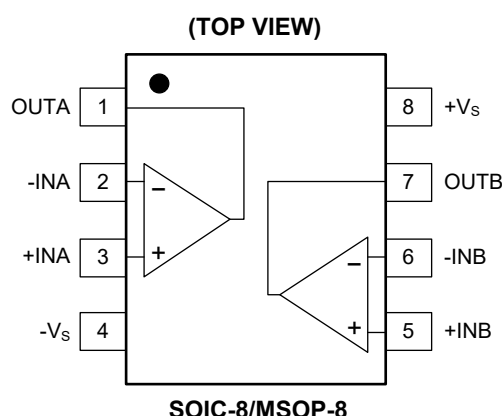

ELECTRICAL CHARACTERISTICS

(V_S = 5V, V_{CM} = 2.5V, R_L = 10kΩ to V_S/2, Full = -40°C to +125°C, typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Input Characteristics						
Input Offset Voltage (V _{OS})		+25°C		25	100	μV
		Full			122	
Input Offset Voltage Drift (ΔV _{OS} /ΔT)		Full		100		nV/°C
Input Bias Current (I _B)		+25°C		15		pA
Input Offset Current (I _{OS})		+25°C		10		pA
Input Voltage Range		+25°C	0		5	V
Common Mode Rejection Ratio ⁽¹⁾ (CMRR)	V _{CM} = 0V to 5V	+25°C	80	95		dB
		Full	62			
Large-Signal Voltage Gain (A _{VO})	V _{OUT} = 0.3V to 4.7V	+25°C	95	145		dB
		Full	90			
Output Characteristics						
Output Voltage High (V _{OH})	R _L = 100kΩ	+25°C	4.99	4.998		V
		Full	4.987			
	R _L = 10kΩ	+25°C	4.98	4.994		
		Full	4.975			
Output Voltage Low (V _{OL})	R _L = 100kΩ	+25°C		2	10	mV
		Full			13	
	R _L = 10kΩ	+25°C		6	15	
		Full			20	
Short-Circuit Limit (I _{SC})	R _L = 10Ω	+25°C	40	45		mA
		Full	21			
Power Supply						
Power Supply Rejection Ratio ⁽¹⁾ (PSRR)	V _S = 2.5V to 5.5V	+25°C	90	125		dB
		Full	71			
Quiescent Current/Amplifier (I _Q)	I _{OUT} = 0A	+25°C		430	700	μA
		Full			826	
Dynamic Performance						
Gain-Bandwidth Product (GBP)	A _V = +100	+25°C		1.5		MHz
Slew Rate (SR)	A _V = +1, 2V output step	+25°C		0.9		V/μs
Overload Recovery Time	A _V = -100, V _{IN} = 200mV (RET to GND)	+25°C		0.07		ms
Noise						
Input Voltage Noise	0.1Hz to 10Hz	+25°C		0.8		μV _{P-P}
Input Voltage Noise Density (e _n)	f = 1kHz	+25°C		49		nV/√Hz

NOTE: 1. PSRR and CMRR are affected by the matching between external gain-setting resistor ratios.


ELECTRICAL CHARACTERISTICS (continued)(V_S = 2.5V, V_{CM} = 1.25V, R_L = 10kΩ to V_S/2, Full = -40°C to +125°C, typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Input Characteristics						
Input Offset Voltage (V _{OS})		+25°C		25	100	μV
		Full			138	
Input Offset Voltage Drift (ΔV _{OS} /ΔT)		Full		150		nV/°C
Input Bias Current (I _B)		+25°C		15		pA
Input Offset Current (I _{OS})		+25°C		10		pA
Input Voltage Range		+25°C	0		2.5	V
Common Mode Rejection Ratio ⁽¹⁾ (CMRR)	V _{CM} = 0V to 2.5V	+25°C	75	95		dB
		Full	68			
Large-Signal Voltage Gain (A _{VO})	V _{OUT} = 0.3V to 2.4V	+25°C	95	140		dB
		Full	90			
Output Characteristics						
Output Voltage High (V _{OH})	R _L = 100kΩ	+25°C	2.49	2.498		V
		Full	2.487			
	R _L = 10kΩ	+25°C	2.48	2.497		
		Full	2.476			
Output Voltage Low (V _{OL})	R _L = 100kΩ	+25°C		1	10	mV
		Full			12	
	R _L = 10kΩ	+25°C		3	15	
		Full			18	
Short-Circuit Limit (I _{SC})	R _L = 10Ω	+25°C	20	27		mA
		Full	14			
Power Supply						
Power Supply Rejection Ratio ⁽¹⁾ (PSRR)	V _S = 2.5V to 5.5V	+25°C	90	125		dB
		Full	71			
Quiescent Current/Amplifier (I _Q)	I _{OUT} = 0A	+25°C		430	700	μA
		Full			831	
Dynamic Performance						
Gain-Bandwidth Product (GBP)	A _V = +100	+25°C		1.5		MHz
Slew Rate (SR)	A _V = +1, 2V output step	+25°C		0.9		V/μs
Overload Recovery Time	A _V = -100, V _{IN} = 200mV (RET to GND)	+25°C		0.04		ms
Noise						
Input Voltage Noise	0.1Hz to 10Hz	+25°C		1		μV _{P-P}
Input Voltage Noise Density (e _n)	f = 1kHz	+25°C		56		nV/√Hz


NOTE: 1. PSRR and CMRR are affected by the matching between external gain-setting resistor ratios.

TYPICAL PERFORMANCE CHARACTERISTICS


Large-Signal Step Response

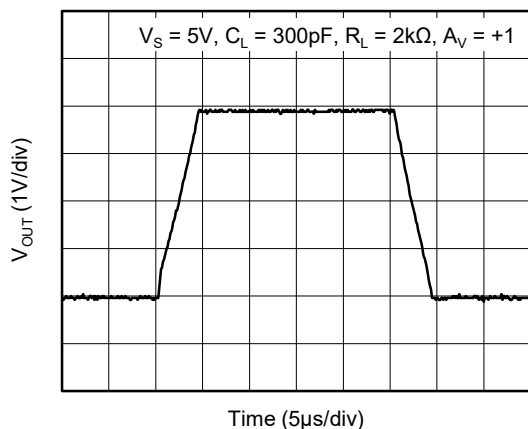


Large-Signal Step Response

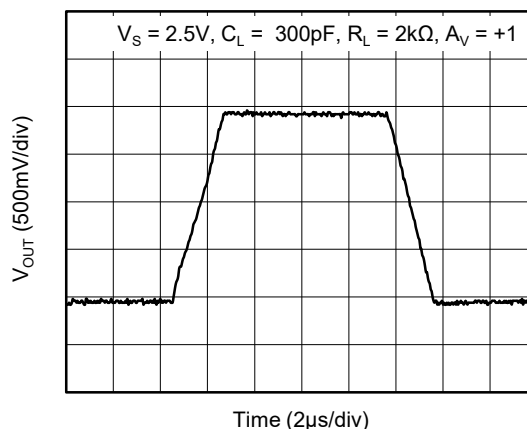


Small-Signal Step Response

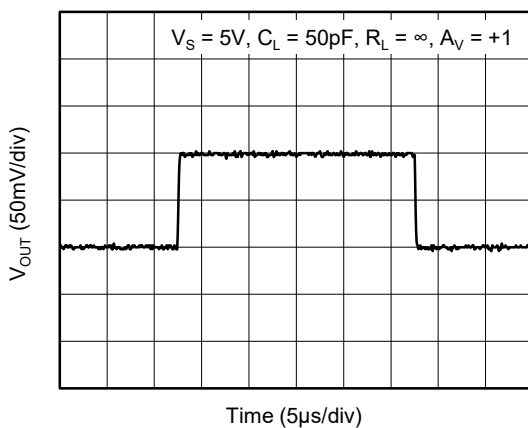


Small-Signal Step Response

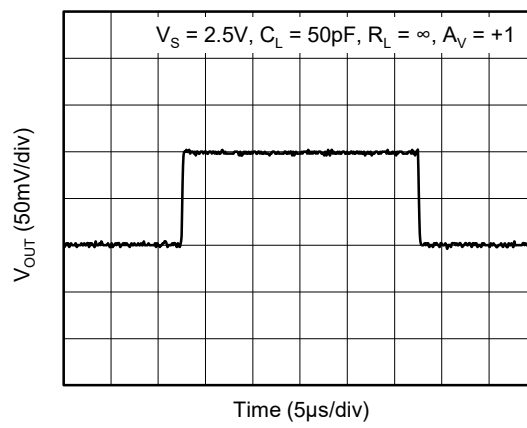

Negative Over-Voltage Recovery

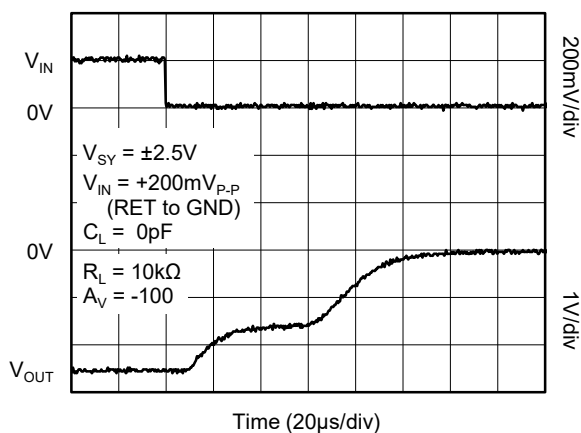


Positive Over-Voltage Recovery

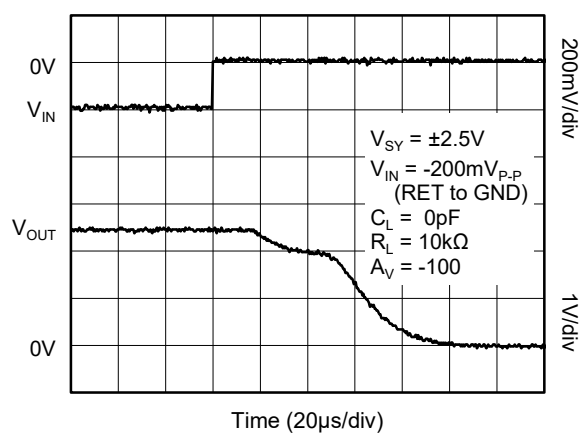


TYPICAL PERFORMANCE CHARACTERISTICS (continued)


0.1Hz to 10Hz Input Voltage Noise

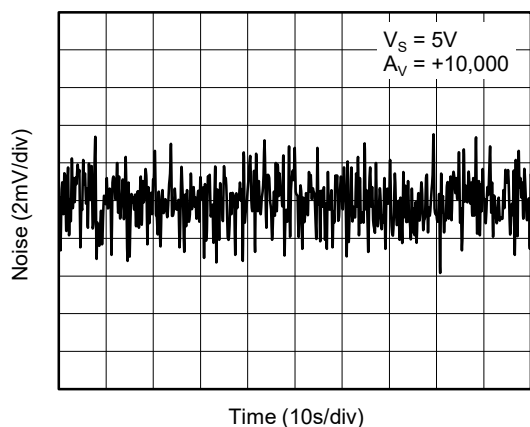


0.1Hz to 10Hz Input Voltage Noise

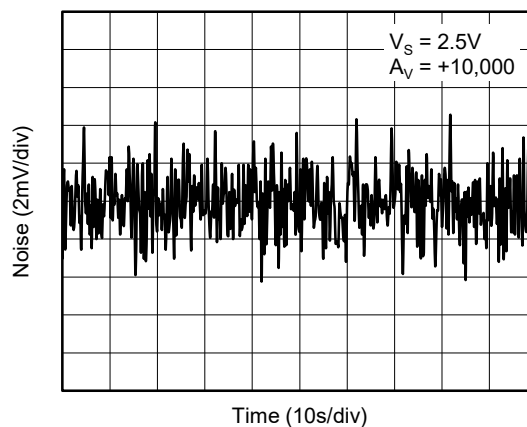


Input Voltage Noise Density vs. Frequency

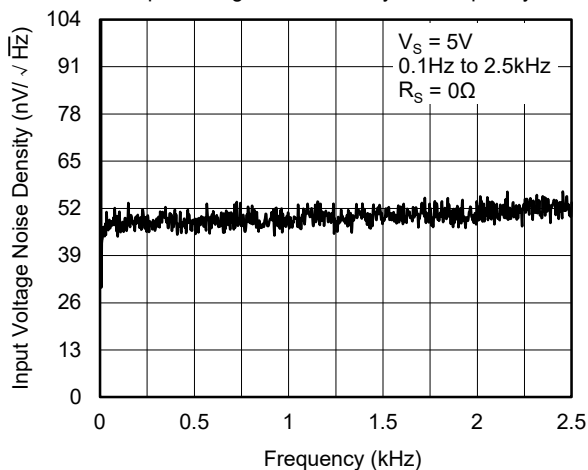


Input Voltage Noise Density vs. Frequency

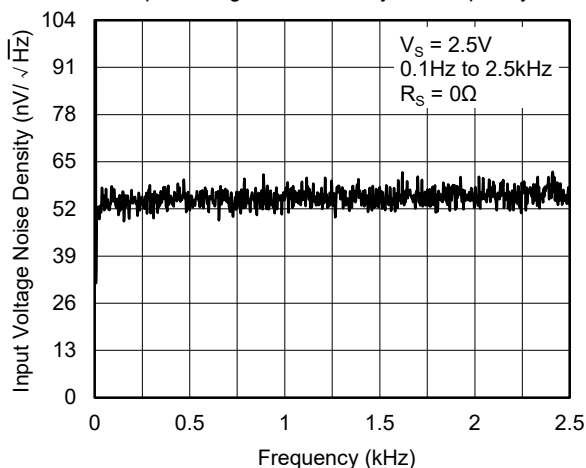







Input Voltage Noise Density vs. Frequency

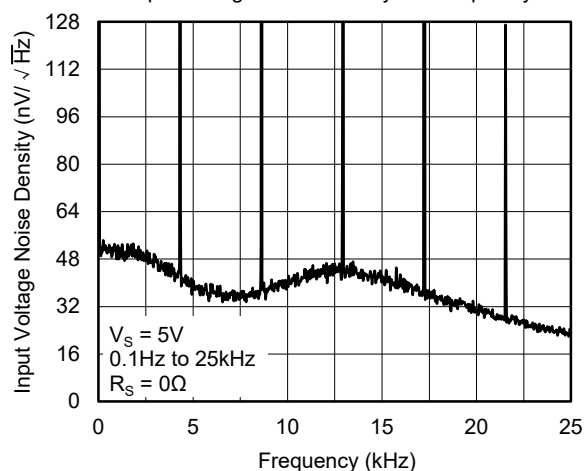





Input Voltage Noise Density vs. Frequency

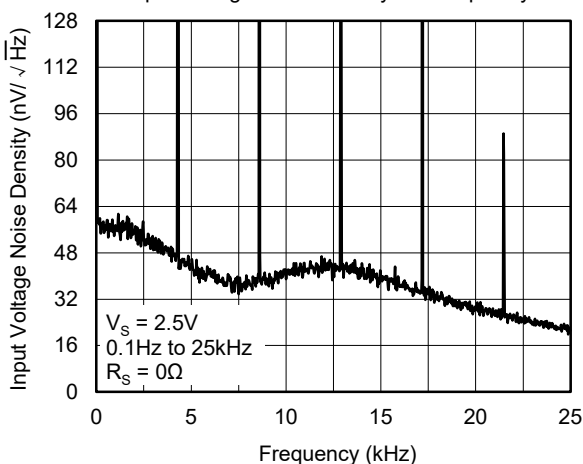

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

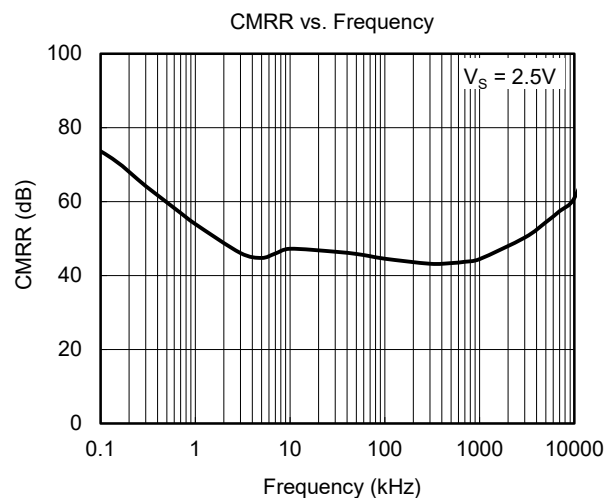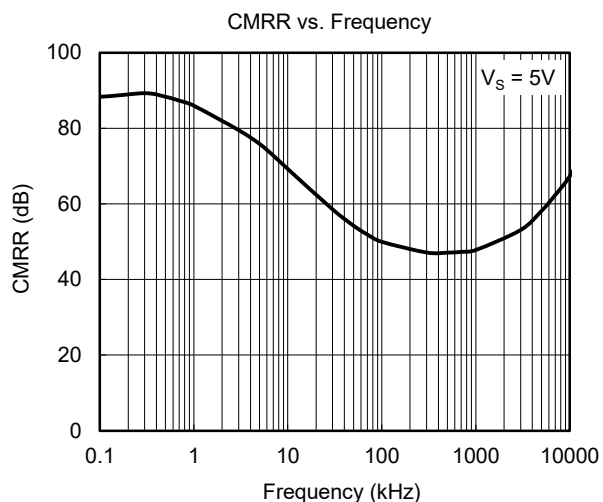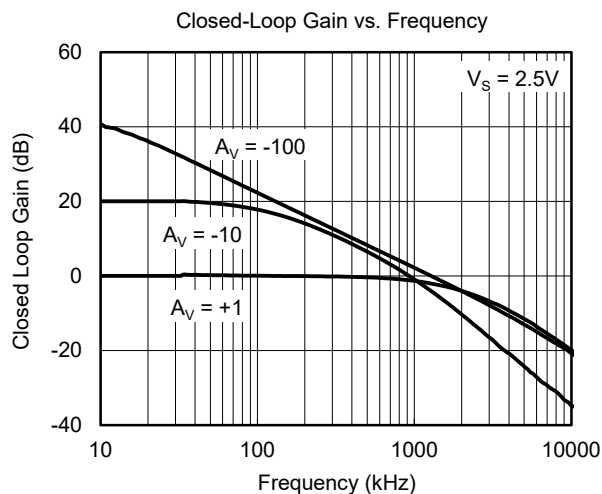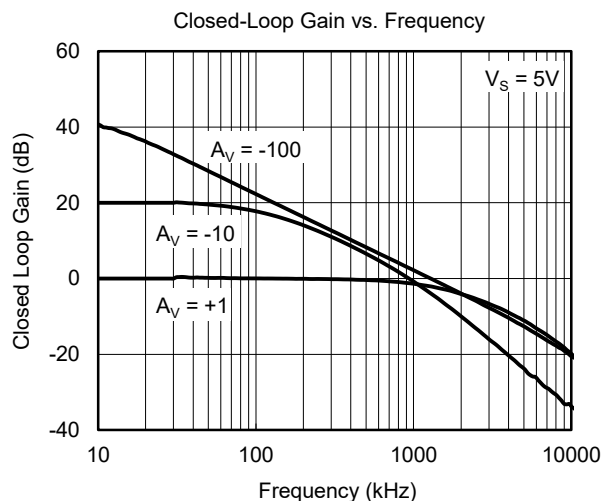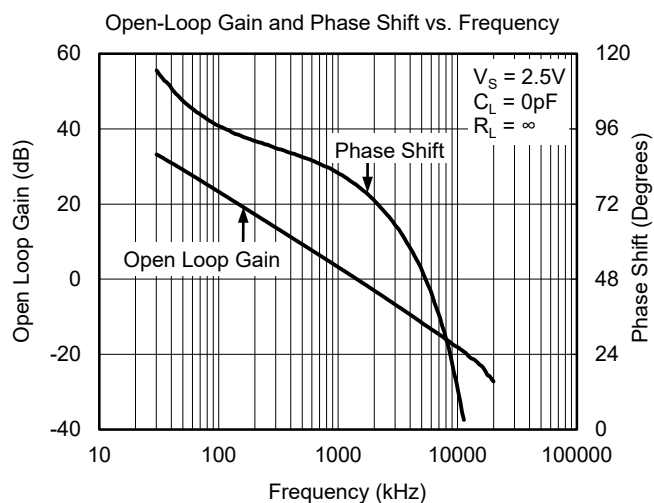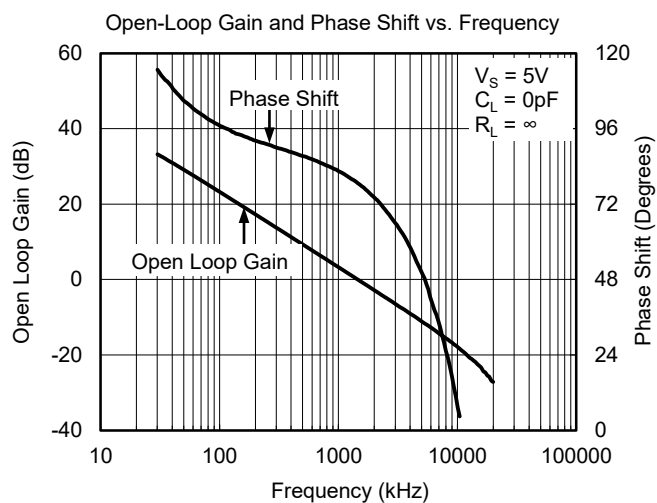

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

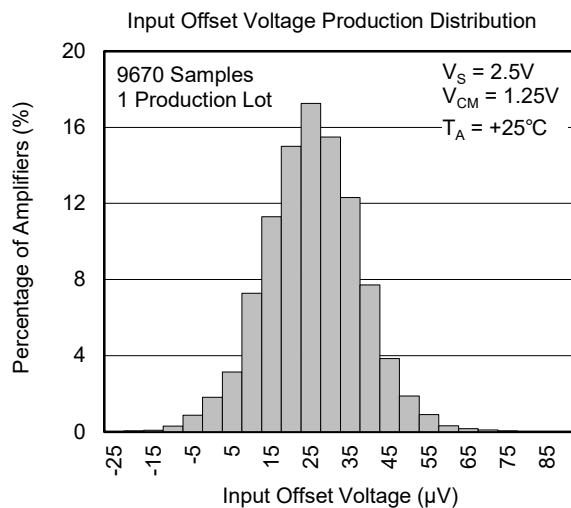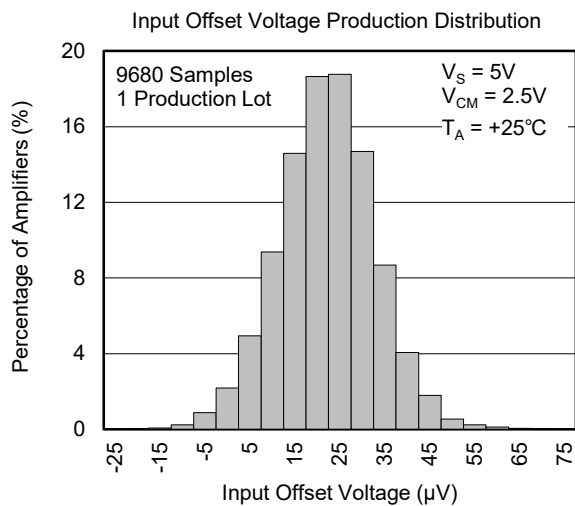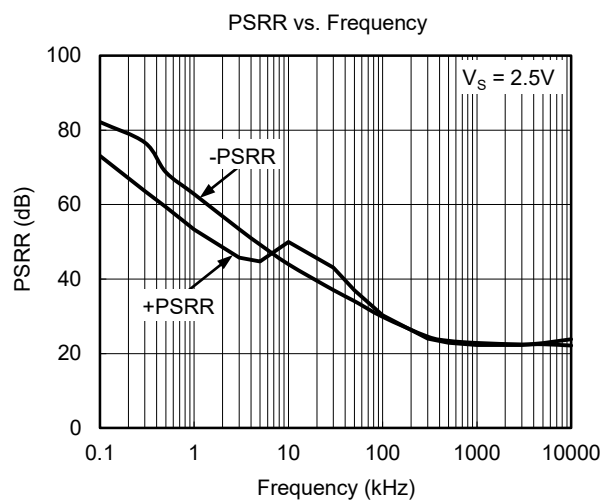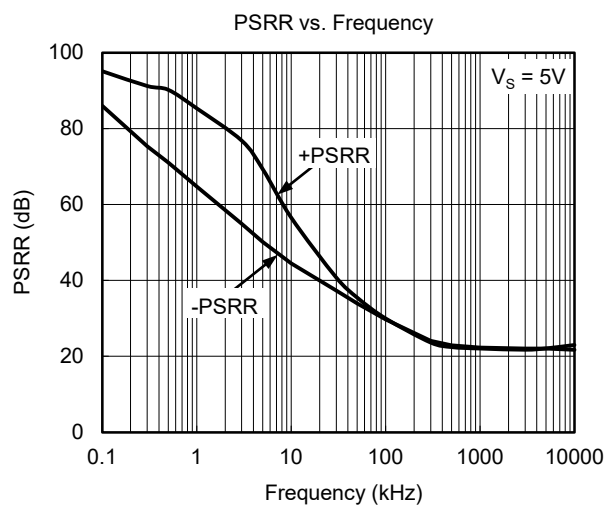


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

JULY 2024 – REV.A.4 to REV.B	Page
Updated Electrical Characteristics section	3, 4
JUNE 2019 – REV.A.3 to REV.A.4	Page
Updated Typical Performance Characteristics section	8
JANUARY 2013 – REV.A.2 to REV.A.3	Page
Added Tape and Reel Information section	11, 12
DECEMBER 2011 – REV.A.1 to REV.A.2	Page
Updated Electrical Characteristics section	3, 4
Updated Typical Performance Characteristics section	7
Updated Package Outline Dimensions section	9~11
MAY 2011 – REV.A to REV.A.1	Page
Changed packages' name	All
Changes from Original (MARCH 2010) to REV.A	Page
Changed from product preview to production data	All

PACKAGE OUTLINE DIMENSIONS

SOIC-8

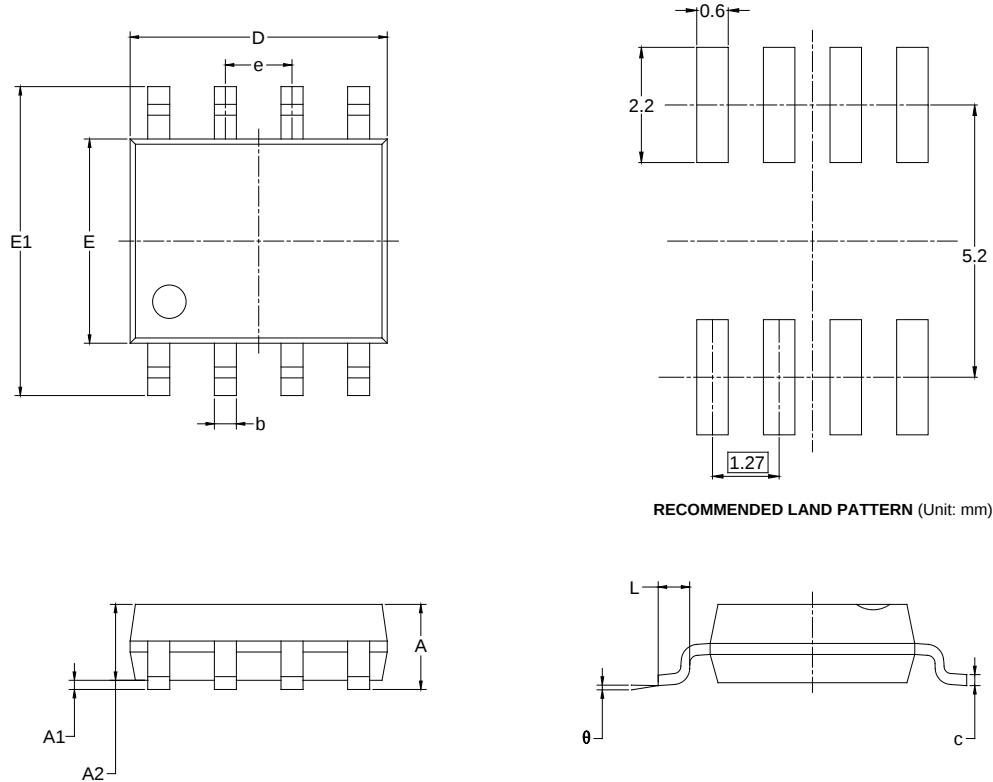


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

NOTES:

1. Body dimensions do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

PACKAGE OUTLINE DIMENSIONS

MSOP-8

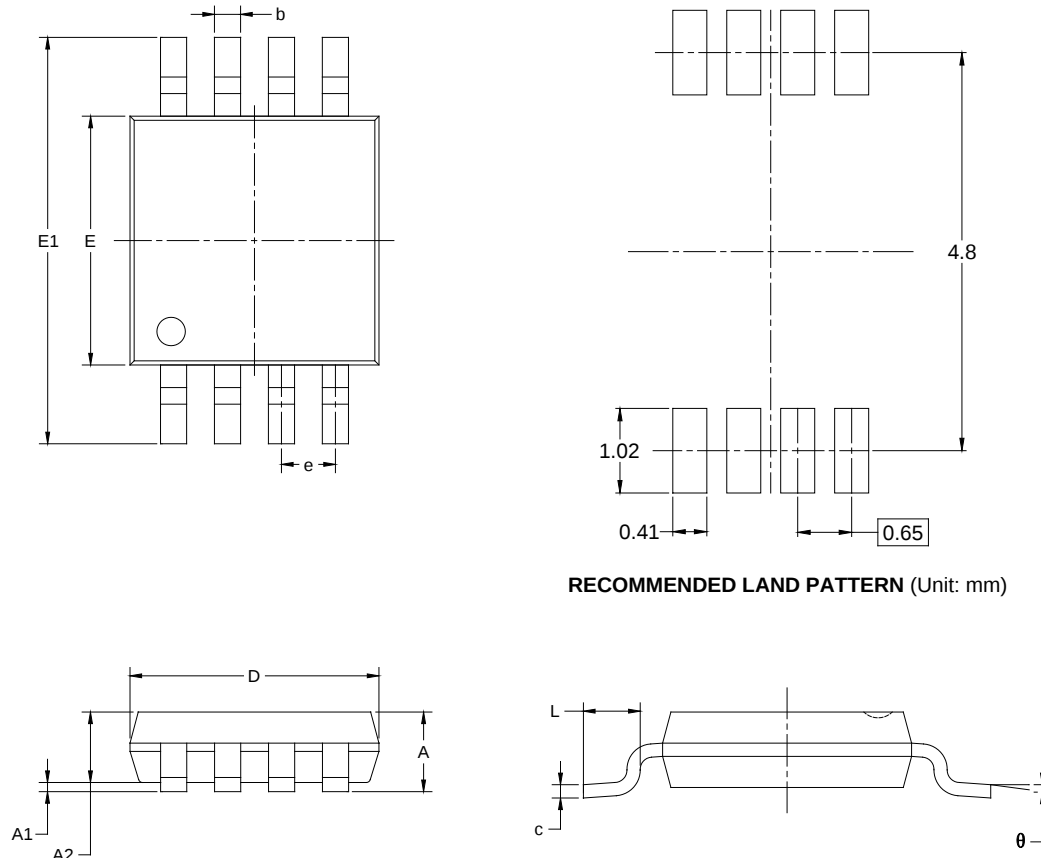

RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°


NOTES:

1. Body dimensions do not include mold flash or protrusion.
2. This drawing is subject to change without notice.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

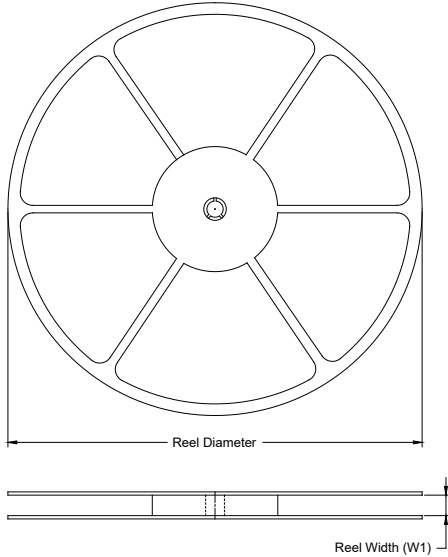

TAPE DIMENSIONS

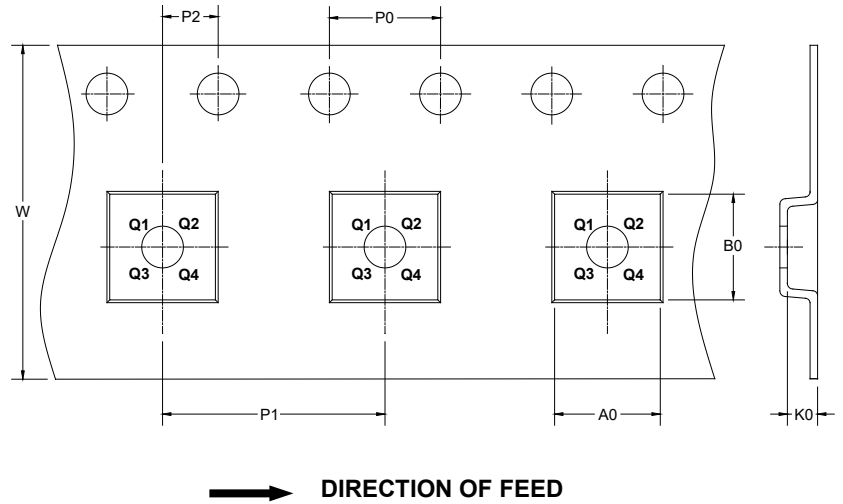

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOIC-8	13"	12.4	6.40	5.40	2.10	4.0	8.0	2.0	12.0	Q1
MSOP-8	13"	12.4	5.20	3.30	1.50	4.0	8.0	2.0	12.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002