



Peripheral/Power Drivers

DH0011/DH0011C/DH0011CN

DH0011*(SH2001)
DH0011C*(SH2002)
DH0011CN*(SH2002P)

high voltage high current drivers


general description

The DH0011 high voltage, high current driver family consists of hybrid integrated circuits which provide a wide range of variations in temperature range, package, and output current drive capability. A summary of the variations is listed below.

Applications include driving lamps, relays, cores, and other devices requiring several hundred milli-amp currents at voltages up to 40V. Logic flexibility is provided through a 4-input NAND gate, a NOR input and an input which bypasses the gating and connects the base of the output transistor.

*Previously called NH0011, NH0011C, NH0011CN

logic diagram

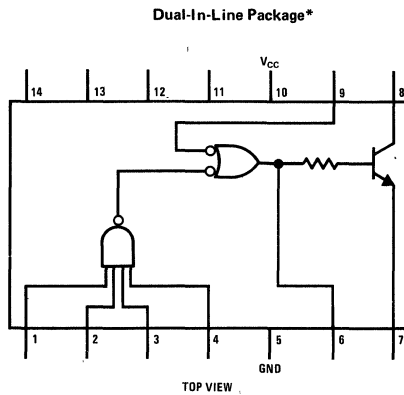

5

ordering information

NSC DESIGNATION	SH DESIGNATION	SEE PACKAGE	TEMPERATURE RANGE	OUTPUT CURRENT CAPABILITY
DH0011H	SH2001	12	-55°C to +125°C	250 mA
DH0011CH	SH2002	12	0°C to +70°C	150 mA
DH0011CN	SH2002P	22	0°C to +70°C	150 mA

*Metal can pin numbers are the same as the dual-in-line pin numbers.

absolute maximum ratings

V_{CC}	8V
Collector Voltage (Output)	40V
Input Reverse Current	1.0 mA
Power Dissipation	800 mW
Operating Temperature Range	DH0011H -55°C to +125°C
	DH0011CH/DH0011CN 0°C to +70°C
Storage Temperature	-65°C to 150°C

electrical characteristics

TEST NO.	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9	PIN 10	SENSE	MIN	MAX
1	V_{IH}	V_{IH}	V_{IH}	V_{IH}	GND		GND	I_{OL1}		V_{CCL}	V_8		V_{OL}
2	V_{IL}				GND		GND	I_{OL1}	V_{IL}	V_{CCL}	V_8		V_{OL}
3	V_{IL}				GND	I_{OL2}				V_{CCL}	V_6		V_{OL2}
4		V_{IL}			GND	I_{OL2}				V_{CCL}	V_6		V_{OL2}
5			V_{IL}		GND	I_{OL2}				V_{CCL}	V_6		V_{OL2}
6				V_{IL}	GND	I_{OL2}				V_{CCL}	V_6		V_{OL2}
7				GND	GND	I_{OL2}			V_{IH}	V_{CCL}	V_6		V_{OL2}
8	V_R	GND	GND	GND	GND					V_{CCH}	I_1		I_R
9	GND	V_R	GND	GND	GND					V_{CCH}	I_2		I_R
10	GND	GND	V_R	GND	GND					V_{CCH}	I_3		I_R
11	GND	GND	GND	V_R	GND					V_{CCH}	I_4		I_R
12					GND				V_R	V_{CCH}	I_9		I_R
13	V_F	V_R	V_R	V_R	GND					V_{CCH}	I_1		$-I_F$
14	V_R	V_F	V_R	V_R	GND					V_{CCH}	I_2		$-I_F$
15	V_R	V_R	V_F	V_R	GND					V_{CCH}	I_3		$-I_F$
16	V_R	V_R	V_R	V_F	GND					V_{CCH}	I_4		$-I_F$
17				GND	GND				V_F	V_{CCH}	I_9		$-I_F$
18					GND		GND			V_{CCL}	V_6	V_{OH}	
19	GND				GND		GND	V_{OX}		V_{CCL}	I_8		I_{OX}
20					GND		GND			V_{PD}	I_{10}		I_{PDH}
21	GND				GND					V_{MAX}	I_{10}		I_{MAX}
22*					GND					V_{PD}			t_{ON}
23*					GND					V_{PD}			t_{OFF}

*See Test Circuits and Waveforms on Page 4.

forcing functions (Note 1) DH0011

PARAMETER	-55°C	+25°C	+125°C	UNITS
V_{CCL}	4.5	4.5	4.5	V
V_{CCH}	5.5	5.5	5.5	V
V_{PD}		5.0		V
V_{MAX}		8.0		V
V_{IL}	1.4	1.1	0.8	V
V_{IH}	2.1	1.9	1.7	V
V_R	4.0	4.0	4.0	V
V_F	0.0	0.0	0.0	V
I_{OL1}	250	250	250	mA
I_{OL2}	8.0	8.0	7.5	mA
V_{OX}	40.0	40.0	40.0	V

Note 1: Temperature Range -55°C to +125°C

forcing functions (Note 2) DH0011C, DH0011CN

PARAMETER	0°C	+25°C	+70°C	UNITS
V _{CCL}	5.00	5.0	5.0	V
V _{CCH}	5.00	5.0	5.0	V
V _{PD}		5.0		V
V _{MAX}		8.0		V
V _{IL}	1.20	1.1	.95	V
V _{IH}	2.00	1.9	1.8	V
V _R	4.00	4.0	4.0	V
V _F	0.45	0.45	0.5	V
I _{OL1}	150	150	150	mA
I _{OL2}	8.0	8.0	7.5	mA
V _{OX}	40.00	40.0	40.0	V

test limits (Note 1) DH0011

PARAMETER	-55°C		+25°C		+125°C		UNITS
	MIN	MAX	MIN	MAX	MIN	MAX	
V _{OL1}		0.45		0.4		0.45	V
V _{OL2}		0.45		0.4		0.45	V
V _{OH}	2.20		2.00		1.80		V
I _R				2.0		5.0	μA
-I _F		1.60		1.6		1.5	mA
I _{OX}				5.0		200	μA
I _{PDH}				30.6			mA
I _{MAX}				29.6			mA
t _{ON}				160			ns
t _{OFF}				220			ns


test limits (Note 2) DH0011C, DH0011CN

PARAMETER	0°C		+25°C		+70°C		UNITS
	MIN	MAX	MIN	MAX	MIN	MAX	
V _{OL1}		0.45		0.45		0.5	V
V _{OL2}		0.45		0.45		0.5	V
V _{OH}	2.05		1.95		1.85		V
I _R				5.0		10.0	μA
-I _F		1.40		1.4		1.35	mA
I _{OX}				5.0		200	μA
I _{PDH}				30.6			mA
I _{MAX}				34.0			mA


5

Note 1: Temperature Range -55°C to +125°C
 Note 2: Temperature Range 0°C to +70°C

switching time test circuit

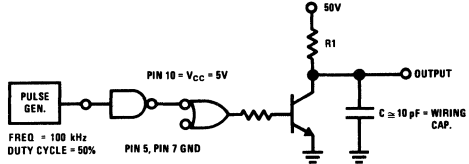

switching time waveforms

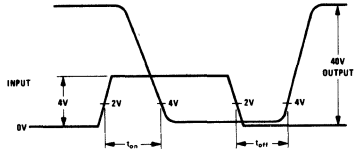

Typical Switching Times

