

VOLTAGE RANGE: 12 KV
CURRENT: 5.0mA

Features


- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage

Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power



Outline Drawings : mm

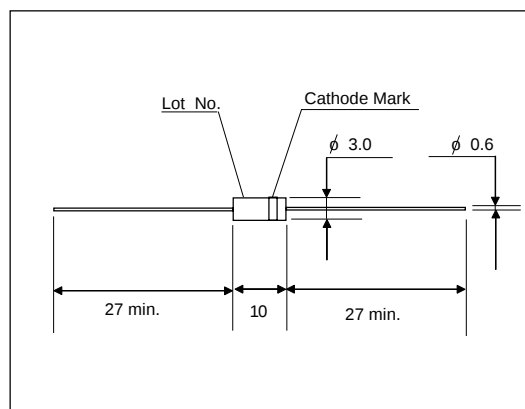

Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise specified

Characteristic	Symbols	SHV-12	Units
Repetitive Peak Reverse Voltage	V_{RRM}	12	kV
Average Output Current $T_A = 25^\circ\text{C}$, Resistive Load	I_O	5.0	mA
Surge Current	I_{FSM}	0.5	A _{peak}
Maximum Forward Voltage Drop at 25°C , $I_F = I_{F(AV)}$	V_F	35	V
Maximum Reverse Current at 25°C , $V_R = V_{RRM}$ at 100°C , $V_R = V_{RRM}$	IR1	2.0	uA
	IR2	5.0	uA
Maximum Reverse Recovery Time at 25°C	T_{rr}	100	nS
Junction Capacitance at 25°C , $V_R = 0\text{V}$, $f = 1\text{MHz}$	C_j	1.0	pF
Junction Temperature	T_J	120	$^\circ\text{C}$
Allowable Operation Case Temperature	T_C	120	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40 to +120	$^\circ\text{C}$