



N-Channel 200-V (D-S) MOSFET



PRODUCT SUMMARY		
V _{DS} (V)	r _{DS(on)} (Ω)	I _D (A)
200	0.480 @ V _{GS} = 10 V	1.50
	0.510 @ V _{GS} = 6.0 V	1.45

FEATURES

- TrenchFET® Power MOSFET
- PWM Optimized for Fast Switching

APPLICATIONS

- Primary Side Switch

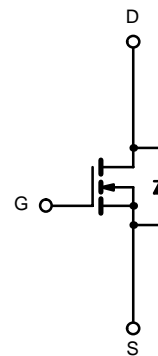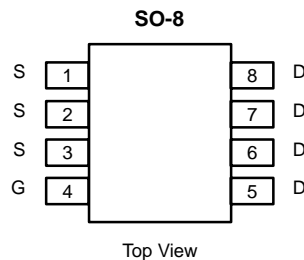

N-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS (T _A = 25°C UNLESS OTHERWISE NOTED)					
Parameter	Symbol	10 secs	Steady State	Unit	
Drain-Source Voltage	V _{DS}	200		V	
Gate-Source Voltage	V _{GS}	± 20			
Continuous Drain Current (T _J = 150°C) ^a	I _D	T _A = 25°C	1.50	1.15	A
		T _A = 70°C	1.20	0.92	
Pulsed Drain Current	I _{DM}	5			
Single Avalanch Current	I _{AS}	1.5			
Single Avalanch Energy	E _{AS}	0.11		mJ	
Continuous Source Current (Diode Conduction) ^a	I _S	2.1	1.1	A	
Maximum Power Dissipation ^a	P _D	T _A = 25°C	2.5	1.3	W
		T _A = 70°C	1.6	0.85	
Operating Junction and Storage Temperature Range	T _J , T _{stg}	-55 to 150		°C	

THERMAL RESISTANCE RATINGS					
Parameter	Symbol	Typical	Maximum	Unit	
Maximum Junction-to-Ambient ^a	R _{thJA}	t ≤ 10 sec	40	50	°C/W
		Steady State	70	85	
Maximum Junction-to-Foot (Drain)	R _{thJF}	20	24		

Notes



a. Surface Mounted on 1" x 1" FR4 Board.

SPECIFICATIONS (T_J = 25 °C UNLESS OTHERWISE NOTED)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	2.0		4	V
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 160 V, V _{GS} = 0 V			1	μA
		V _{DS} = 160 V, V _{GS} = 0 V, T _J = 55°C			5	
On-State Drain Current ^a	I _{D(on)}	V _{DS} ≥ 5 V, V _{GS} = 10 V	5			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = 10 V, I _D = 1.5 A		0.39	0.480	Ω
		V _{GS} = 6.0 V, I _D = 1.45 A		0.420	0.510	
Forward Transconductance ^a	g _{fs}	V _{DS} = 15 V, I _D = 1.5A		5		S
Diode Forward Voltage ^a	V _{SD}	I _S = 2.1 A, V _{GS} = 0 V		0.8	1.2	V
Dynamic^b						
Total Gate Charge	Q _g	V _{DS} = 100 V, V _{GS} = 10 V, I _D = 1.5 A		6	9	nC
Gate-Source Charge	Q _{gs}			0.9		
Gate-Drain Charge	Q _{gd}			1.9		
Gate Resistance	R _G			3.7		Ω
Turn-On Delay Time	t _{d(on)}	V _{DD} = 100 V, R _L = 100 Ω I _D ≅ 1.0 A, V _{GEN} = 10 V, R _G = 6 Ω		10	15	ns
Rise Time	t _r			12	20	
Turn-Off Delay Time	t _{d(off)}			10	15	
Fall Time	t _f			15	25	
Source-Drain Reverse Recovery Time	t _{rr}	I _F = 2.1 A, di/dt = 100 A/μs		55	90	

Notes


- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
b. Guaranteed by design, not subject to production testing.

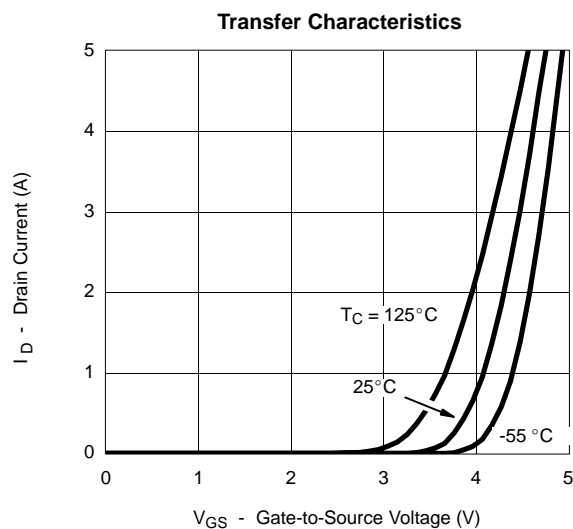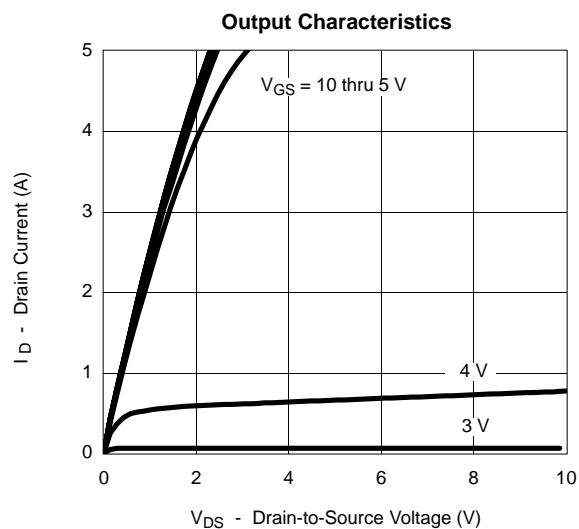TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


On-Resistance vs. Drain Current

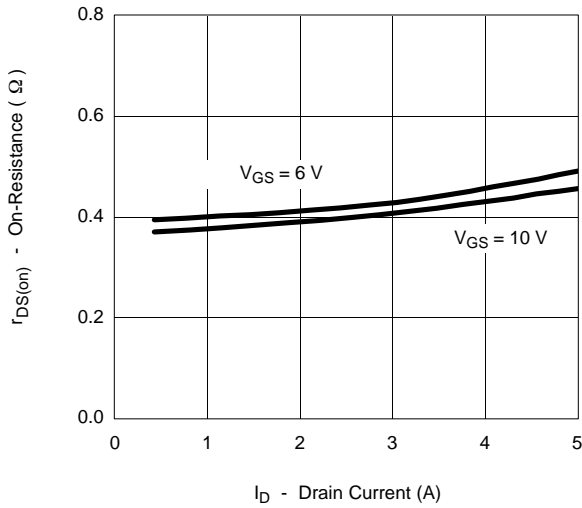


Capacitance

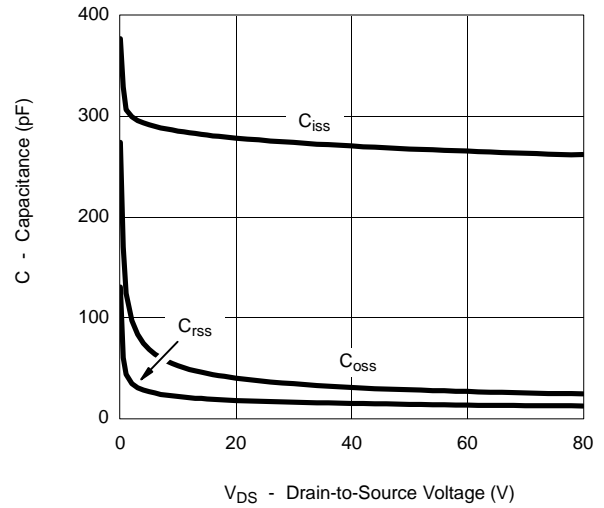


Gate Charge

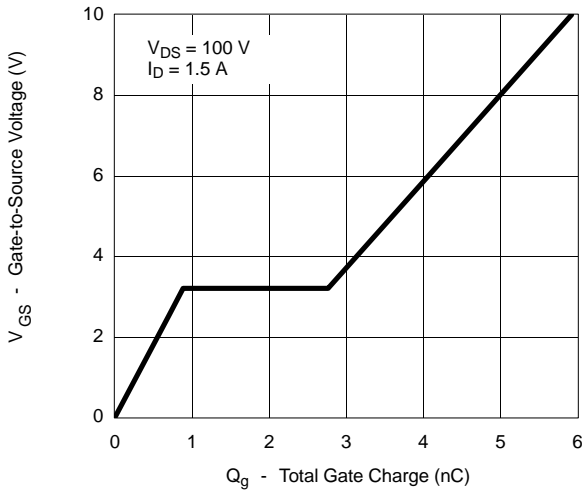


On-Resistance vs. Junction Temperature

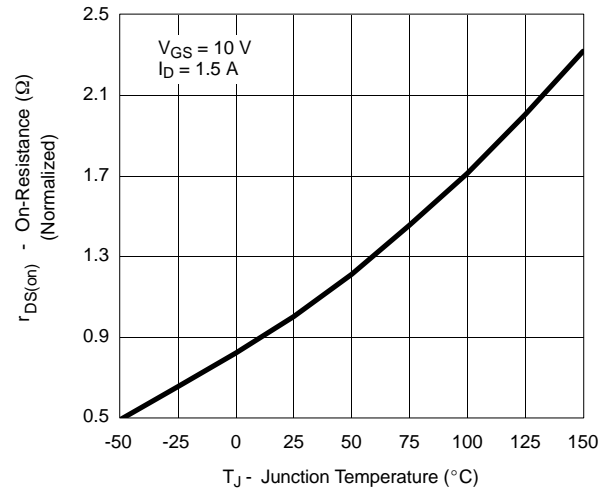





Source-Drain Diode Forward Voltage

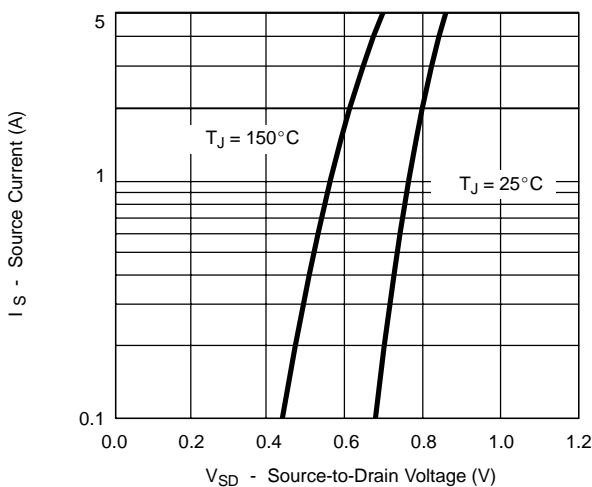

On-Resistance vs. Gate-to-Source Voltage

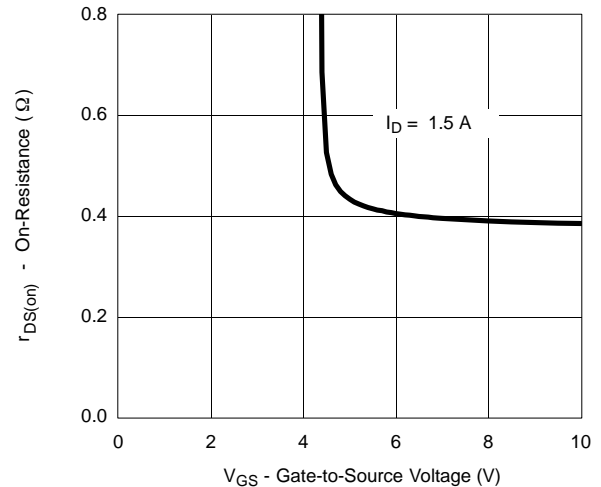

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

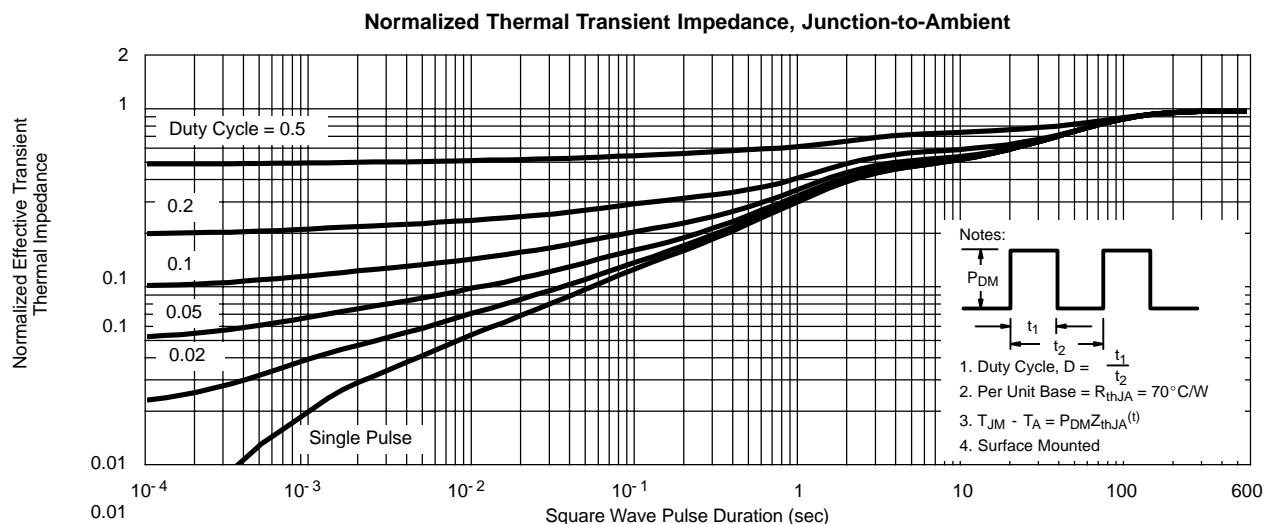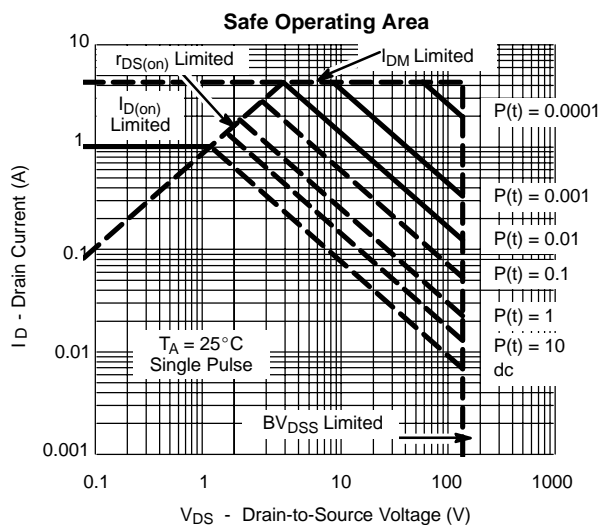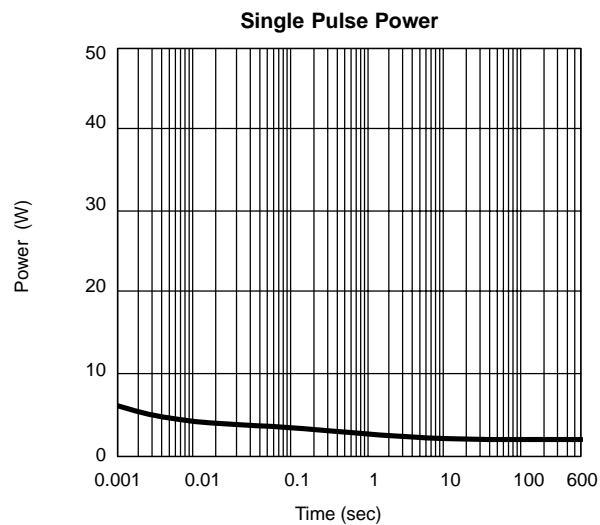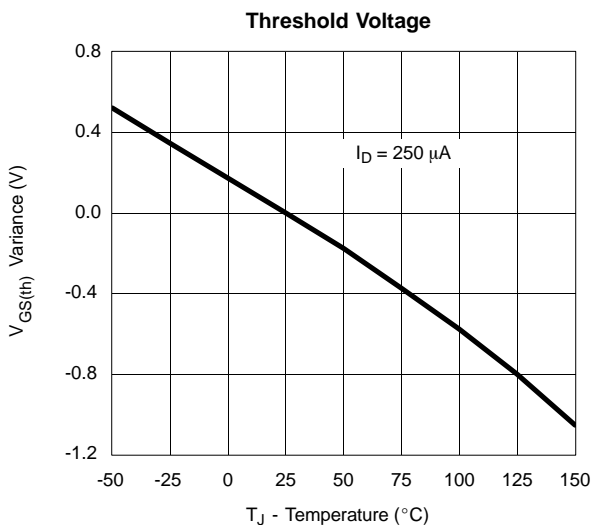



TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

