



SIL15F Series

12 Vin single output



DC-DC CONVERTERS

Typhoon Non-isolated

Preliminary Data - subject to change without notice

1

NEW Product

- Designed to meet ultra fast transient requirements: 300 A/ μ s step load transients
- 15 A current rating
- Input voltage range: 8 Vdc to 13.2 Vdc
- Output voltage range: 1.0 Vdc to 1.8 Vdc
- Extremely low internal power dissipation
- Minimal thermal design concerns
- Ideal solution where board space is at a premium or tighter card pitch is required
- Industry standard surface-mount footprint
- RoHS compliant



The SIL15F-12 series are non-isolated dc-dc converters packaged in a single-in-line footprint giving designers a cost effective solution for conversion from a 12 V source. The SIL15F-12 has an input range of 8 Vdc to 13.2 Vdc and offers an output voltage range from 1.0 Vdc to 1.8 Vdc with a 15 A load, which allows for maximum design flexibility and a pathway for future upgrades. The SIL15F-12 is designed for applications that include distributed power, workstations, optical network and wireless applications. Implemented using state of the art surface-mount technology and automated manufacturing techniques, the SIL15F-12 offers compact size and efficiencies of 85% typical at 1.8 Vout.



2 YEAR WARRANTY

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated
 $C_{in} = 270 \mu F$, $C_{out} = 0 \mu F$

SPECIFICATIONS

OUTPUT SPECIFICATIONS

Voltage adjustability	Trimable	$\pm 10\%$
Setpoint accuracy		$\pm 3.5\%$ typ.
Line regulation		$\pm 1.0\%$ typ.
Load regulation		$\pm 2.0\%$ typ.
Minimum load		0 A
Overshoot/undershoot		None
Ripple and noise	5 Hz to 20 MHz	40 mV pk-pk 25 mV rms
Temperature co-efficient		$\pm 0.01\%/^{\circ}C$
Transient response (1.2 Vout)	di/dt 200 A/ μ s (See Note 3)	5 A load step 100 mV max. deviation <10 μ s recovery to within $\pm 1.0\%$
Remote sense		10% Vo compensation

INPUT SPECIFICATIONS

Input voltage range		8-13.2 Vdc
Input current	No load	100 mA
Input current (max.)		2.0 A max. @ Io max. and Vout = 1.2 V
Input reflected ripple		100 mA rms
Remote ON/OFF		(See Note 1)
Start-up time		5 ms

EMC CHARACTERISTICS

Electrostatic discharge	EN61000-4-2, IEC801-2
Conducted immunity	EN61000-4-6
Radiated immunity	EN61000-4-3

GENERAL SPECIFICATIONS

Efficiency	Vin = 12 V, Vout = 1.8 V	84% typ.
Insulation voltage		Non-isolated
Switching frequency Vin = 12 V, Vout = 1.2 V	Variable	500 kHz typ.
Approvals and standards		EN60950 UL/cUL60950
Material flammability		UL94V-0
Dimensions	(LxWxH)	50.80 x 8.50 x 12.70 mm 2.0 x 0.335 x 0.50 inches
Weight		5 g (0.18 oz)
MTBF	Telcordia SR-332	TBD hours

ENVIRONMENTAL SPECIFICATIONS

Thermal performance (See Figure 1)	Operating ambient, temperature	-40 °C to +85 °C
	Non-operating	-40 °C to +125 °C

PROTECTION

Short-circuit	Continuous
Thermal	Automatic recovery

International Safety Standard Approvals



UL/cUL CAN/CSA 22.2 No. E174104
 UL 60950 File No. E174104



TÜV Product Service (EN60950) Certificate No. B 04 04 38572 041
 CB report and certificate to IEC60950



SIL15F Series

12 Vin single output



DC-DC CONVERTERS

Typhoon Non-isolated

Preliminary Data - subject to change without notice


2

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

NEW Product

OUTPUT POWER (MAX.)	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.)	EFFICIENCY (TYP.)	REGULATION		MODEL NUMBER ^(1,4,5)
						LINE	LOAD	
15.0 W	8-13.2 Vdc	1 V	0 A	15 A	81%	±1.0%	±2.0%	SIL15F-12S1V0-VJ
18.0 W	8-13.2 Vdc	1.2 V	0 A	15 A	82%	±1.0%	±2.0%	SIL15F-12S1V2-VJ
22.5 W	8-13.2 Vdc	1.5 V	0 A	15 A	83%	±1.0%	±2.0%	SIL15F-12S1V5-VJ
27.0 W	8-13.2 Vdc	1.8 V	0 A	15 A	84%	±1.0%	±2.0%	SIL15F-12S1V8-VJ

Part Number System with Options

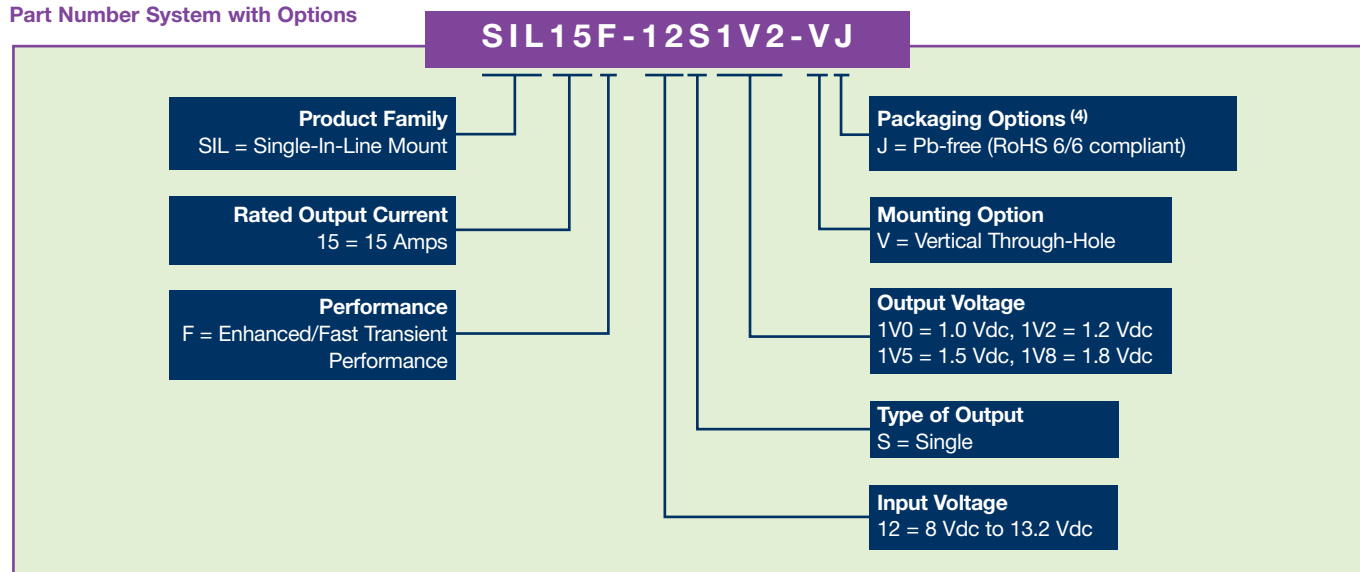

Notes

- 1 The SIL15F-12 features an 'Active High' Remote ON/OFF operation. If not using the Remote ON/OFF pin, leave the pin open (the converter will be on). The Remote ON/OFF pin is referenced to ground.

The following conditions apply for the SIL15F-12:

Configuration

Remote pin open circuit
Remote pin pulled low
Remote pin pulled high

Converter Operation

Unit is ON
Unit is OFF
Unit is ON

An 'Active Low' Remote ON/OFF version is also possible with this converter. To order please place the suffix 'R' toward the end of the part number, e.g. SIL15F-12S1V8-VRJ.

- 2 A 270 μ F electrolytic input capacitor maybe required for test purposes only.
- 3 An external output capacitor is not required for basic operation. Adding distributed capacitance at the load will improve the transient response.
- 4 TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 5 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.



SIL15F Series

12 Vin single output



DC-DC CONVERTERS

Typhoon Non-isolated

Preliminary Data - subject to change without notice

3

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

NEW Product

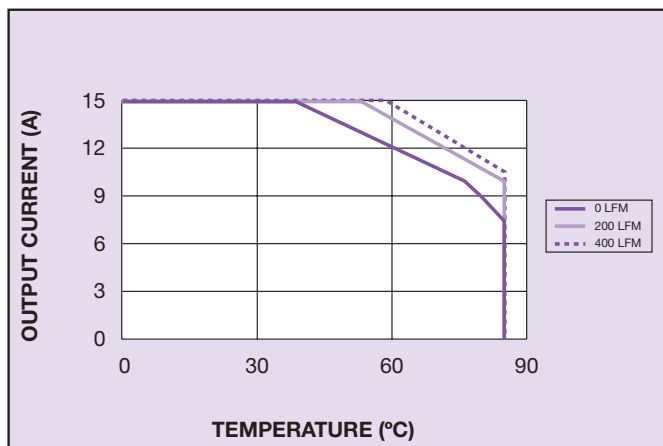


Figure 1 - Derating Curve
Vin = 12 V, Output Voltage = 1.0 V (See Note A)

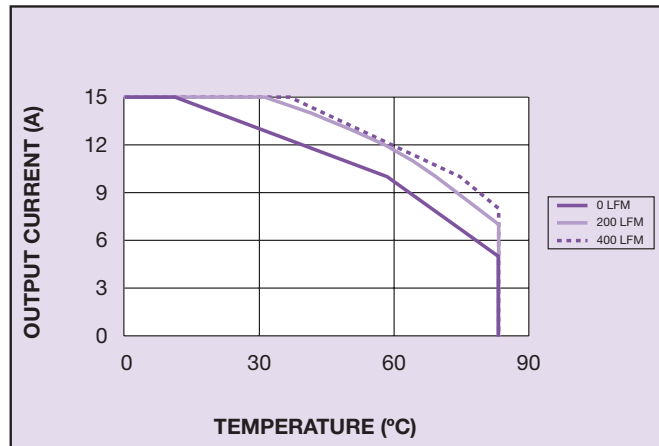


Figure 2 - Derating Curve
Vin = 12 V, Output Voltage = 1.8 V (See Note A)

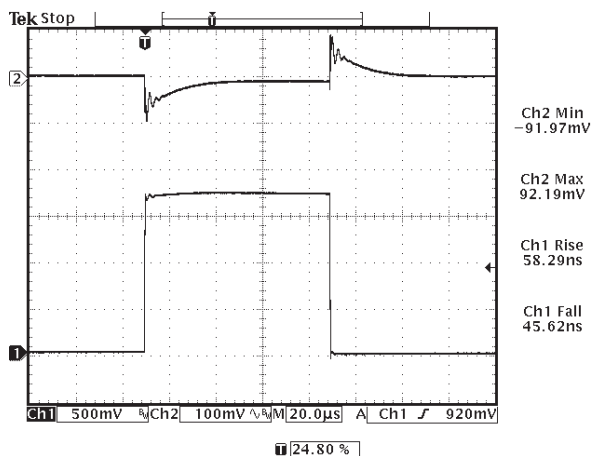


Figure 3 - Typical Transient Response,
Vin = 12 V, Vout = 1.2 V
Channel 1: 5 A Load Step, di/dt = 100 A/µs
Channel 2: Deviation on Unit, Recovery Time = 10 µs

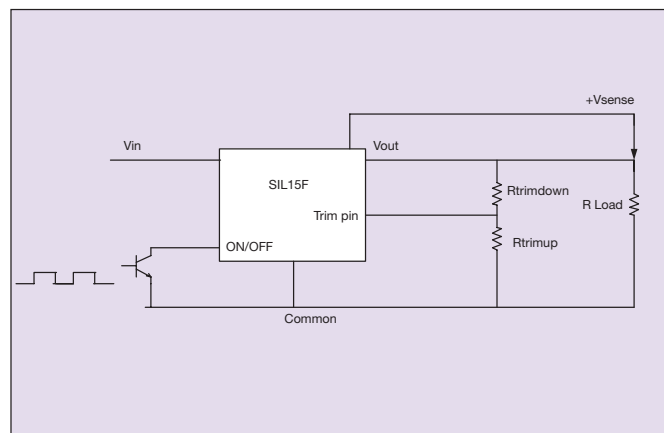


Figure 4 - Standard Application

Notes

- A** The derating curve represents the conditions at which internal components are within the Artesyn derating guidelines.



SIL15F Series

12 Vin single output



DC-DC CONVERTERS


Typhoon Non-isolated

Preliminary Data - subject to change without notice

4

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

NEW Product

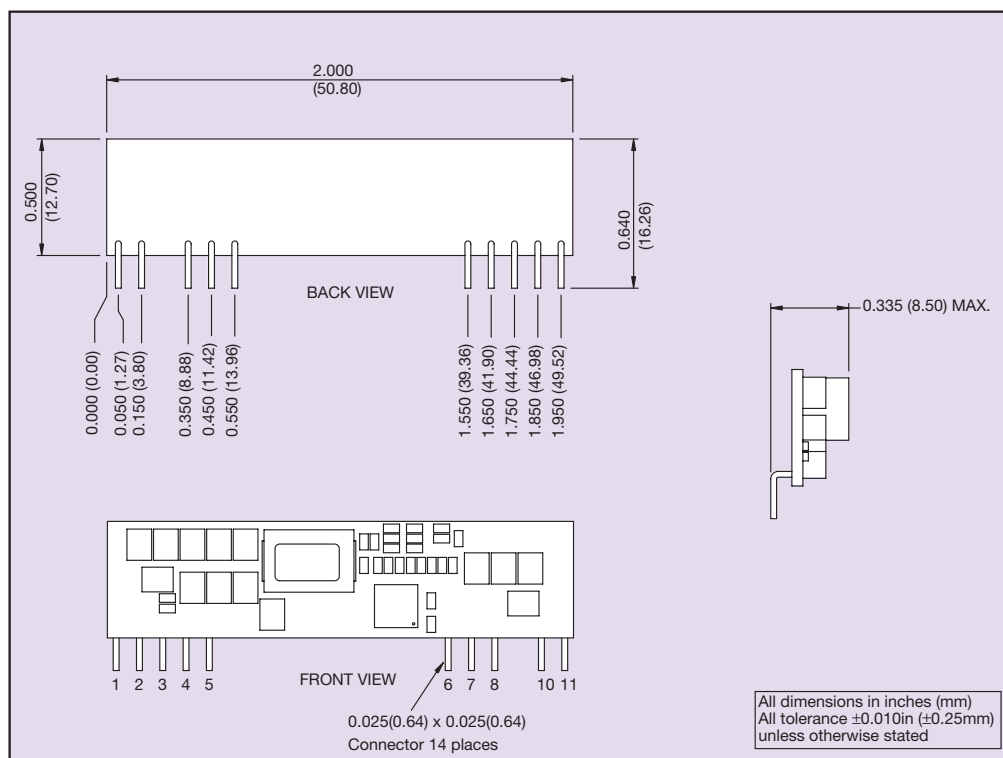

PIN CONNECTIONS	
PIN NO.	FUNCTION
1	+Vout
2	+Vout
3	Remote Sense+
4	+Vout
5	Ground
6	Ground
7	+Vin
8	+Vin
10	Trim
11	Remote ON/OFF

Figure 5 - Mechanical Drawing and Pinout Table

Datasheet © Artesyn Technologies© 2005

The information and specifications contained in this datasheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. The information and specifications contained or described herein are subject to change in any manner at any time without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Please consult our website for the following items: ✓ Application Note

www.artesyn.com