



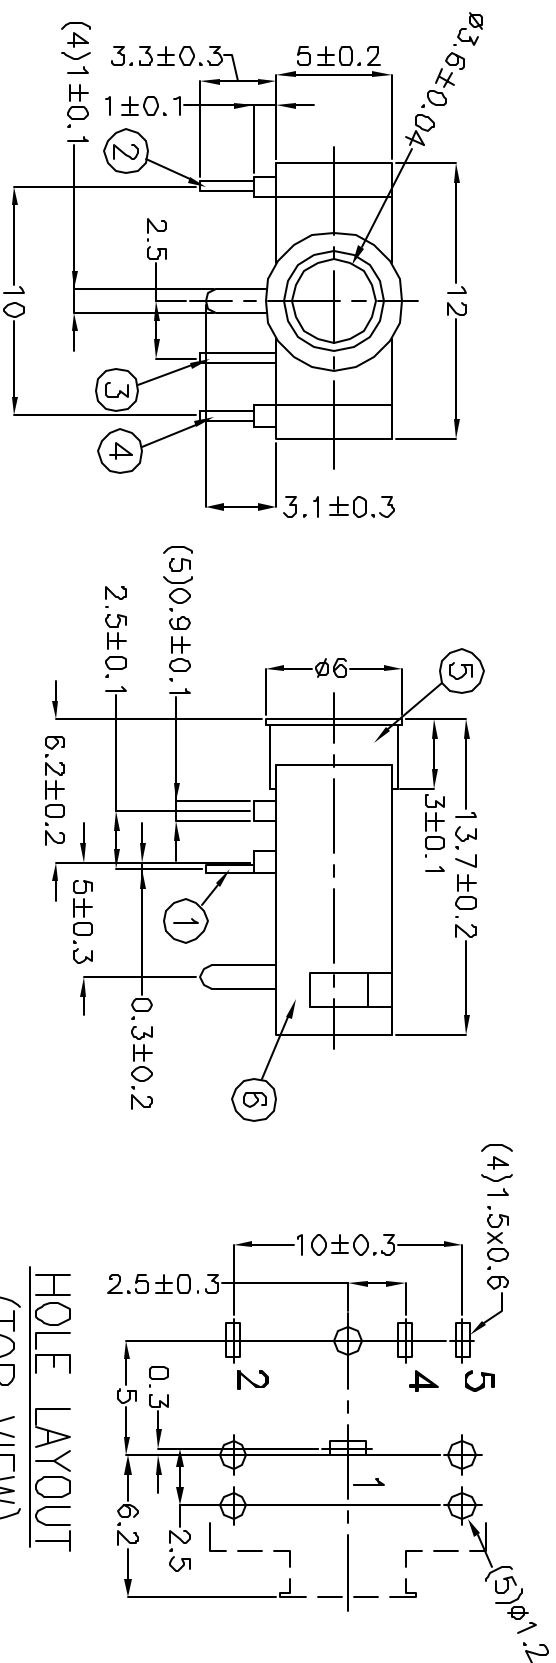

HOLE LAYOUT
(TOP VIEW)

SCHEMATIC



SPECIFICATIONS:

RATING: 12V DC @ 1A

CONTACT RESISTANCE:
30 MOHMS MAX

INSULATION RESISTANCE:
100 MOHMS MIN @ 500V DC

WITHSTAND VOLTAGE:
500V AC FOR 1 MINUTE

LIFE: 5,000 CYCLES

6	HOUSING	PBT	1	BLACK COLOR
5	BARREL	BRASS	1	NICKEL PLATED
4	TIP SPRING	0.25T TiCuR1-M-EH	1	SILVER PLATED
3	BREAK TERMINAL	0.3T BRASS	1	SILVER PLATED
2	RING SPRING	0.2T TiCuR1-M-EH	1	SILVER PLATED
1	EARTH TERMINAL	0.2T PHOSPHOR BRONZE	1	SILVER PLATED
NO.	DESCRIPTION	MATERIAL	QTY	FINISH



9815 SW Allen, Suite 103
Beverton, OR 97006
Phone: (503) 643-4899
800-276-4899
Fax: (503) 372-1266
Website: www.cui.com

TITLE:

3.5mm AUDIO JACK-STEREO

PART NO.

SJ-3524NG

UNITS:

MILLIMETERS

DRAWN BY:

Todd R. White

APPROVED BY:

SCALE:

3X