



SK215 THRU SK220

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 150 to 200 Volts Forward Current - 2.0 Ampere

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Metal silicon junction, majority carrier conduction
- Low reverse leakage
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed: 250°C/10 seconds at terminals


MECHANICAL DATA

Case: JEDEC SMB(DO-214AA) molded plastic body
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.005 ounce, 0.138 grams

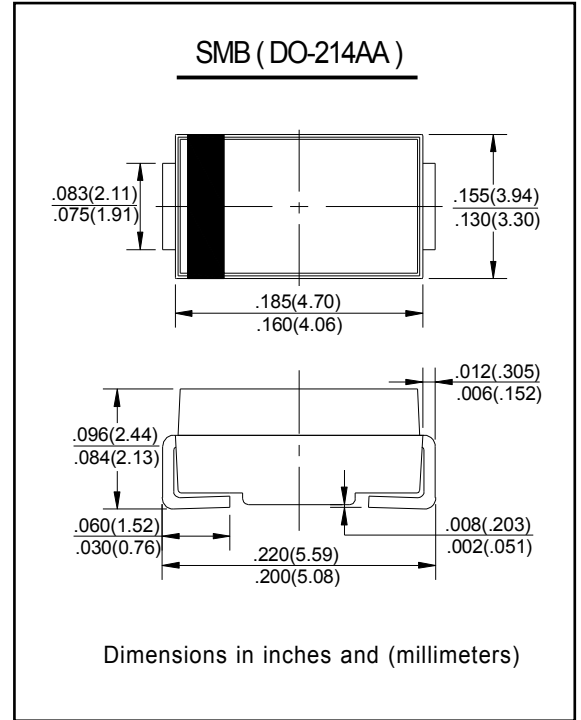

Maximum Ratings and Electrical Characteristics @ $T_A=25^\circ\text{C}$ unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

Characteristic	Symbol	SK215	SK220	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	150	200	V
Working Peak Reverse Voltage	V _{RWM}			
DC Blocking Voltage	V _R			
RMS Reverse Voltage	V _{R(RMS)}	105	140	V
Average Rectified Output Current (Note1)	I _O	2.0		A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	50		A
Forward Voltage @I _F = 2.0A	V _{FM}	0.9		V
Peak Reverse Current @T _A = 25°C	I _{RM}	0.2		mA
At Rated DC Blocking Voltage @T _A = 100°C		5.0		
Typical Junction Capacitance (Note 1)	C _j	55		pF
Operating and Storage Temperature Range	T _j , T _{STG}	-55 to +150		°C

Note: 1. Mounted on FR-4 PCB with 5.0 x 5.0mm copper pads.
 2. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.



SK215 THRU SK220

RATINGS AND CHARACTERISTIC CURVES

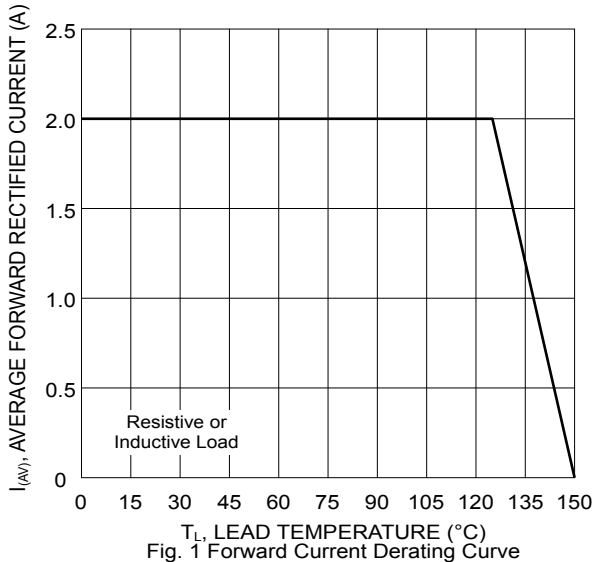


Fig. 1 Forward Current Derating Curve

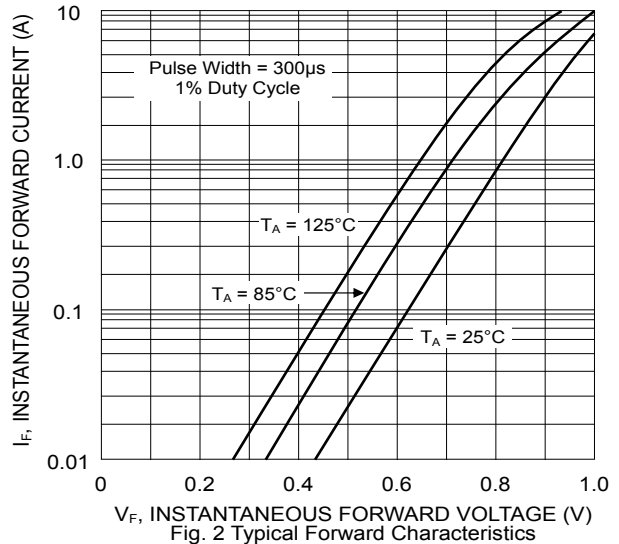


Fig. 2 Typical Forward Characteristics

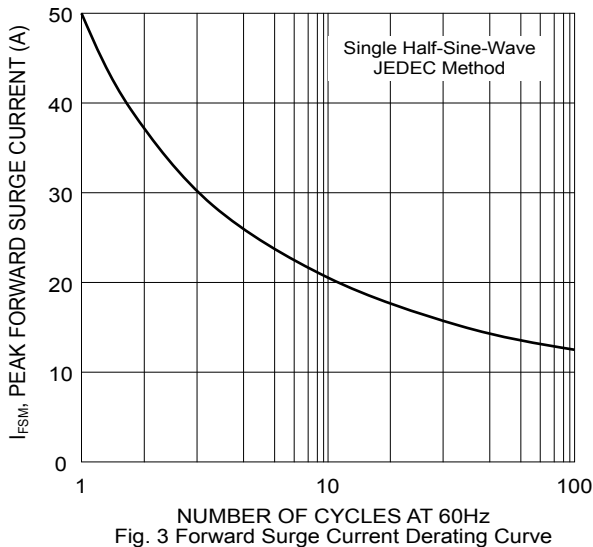


Fig. 3 Forward Surge Current Derating Curve

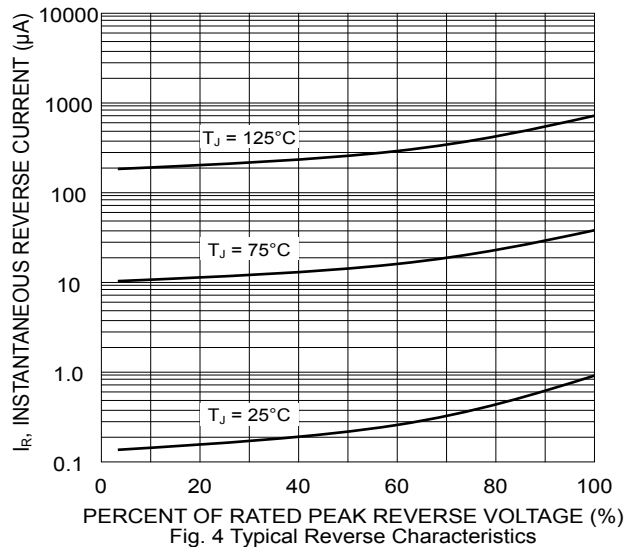


Fig. 4 Typical Reverse Characteristics

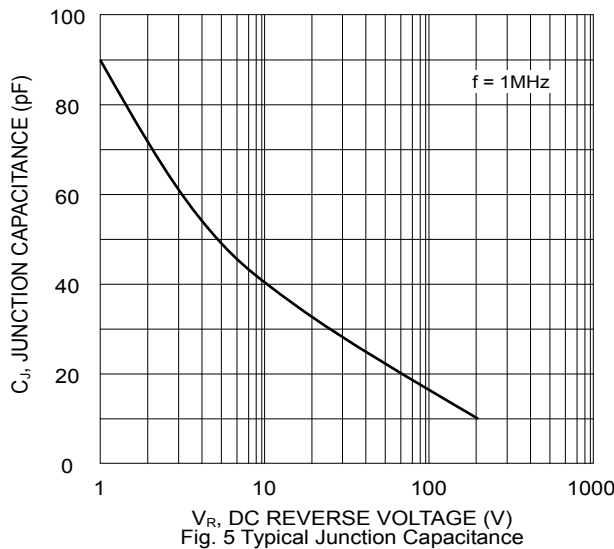


Fig. 5 Typical Junction Capacitance