



SK22B thru SK210B

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE - 20 TO 100 VOLTS CURRENT - 2.0 AMPERES



SMB/DO-214AA

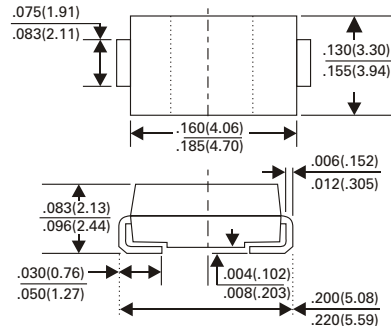

Dimensions in inches and (millimeters)

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mount applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier, majority carrier conduction
- Low power loss, high efficiency
- High surge capability
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering : 260°C/10 seconds at terminals
- Pb free product at available : 99% Sn above meet RoHS environment substance directive request

MECHANICAL DATA

Case : JEDEC DO-214AA molded plastic

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Color band denotes positive end (cathode)

Standard Package : 12mm tape (EIA STD EIA-481)

Weight : 0.003 ounce, 0.093gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified
Resistive or inductive load

	SYMBOL	SK22B	SK23B	SK24B	SK25B	SK26B	SK28B	SK29B	SK210B	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	90	100	Volts
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	63	70	Volts
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	90	100	Volts
Maximum Average Forward Rectified Current at T _L (Figure 1)	I _(AV)	2.0								Amps
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I _{FSM}	50								Amps
Maximum Instantaneous Forward Voltage at 2.0A	V _F	0.5			0.7		0.85			Volts
Maximum DC Reverse Current (NOTE 1) T _A =25°C at Rated DC Blocking Voltage T _A =100°C	I _R	0.5 20								mA
Maximum Thermal Resistance (NOTE 2)	R _{θJA} R _{θJL}	75 17								°C / W
Typical Junction Capacitance (NOTE 3)	C _J	45			30					pF
Storage and Operating Temperature Range	T _J T _{STG}	-55 to + 150								°C

NOTES :

1. Pulse test with $p_w=300 \mu s$, 2% duty cycle

2. Mounted on P.C.B with 8.0mm² (0.13mm thick) copper pad areas

SK22B thru SK210B

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

RATING AND CHARACTERISTICS CURVES SK22B THRU SK210B

