


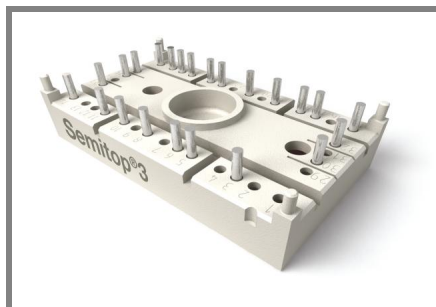

SEMITOP® 3

IGBT Module

SK25MLI065


Target Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- Ultra Fast NPT IGBT technology
- CAL technology FWD

Typical Applications


- Multi level inverter

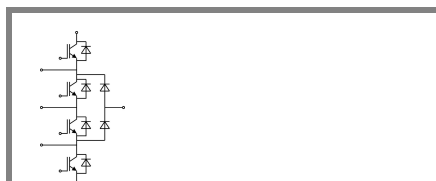

MLI

Absolute Maximum Ratings				$T_s = 25\text{ °C}$, unless otherwise specified	
Symbol	Conditions			Values	Units
IGBT					
V_{CES}	$T_j = 25\text{ °C}$			600	V
I_C	$T_j = 125\text{ °C}$	$T_s = 25\text{ °C}$		30	A
		$T_s = 80\text{ °C}$		22	A
I_{CRM}	$I_{CRM} = 2 \times I_{Cnom}$			60	A
V_{GES}				± 20	V
t_{psc}	$V_{CC} = 300\text{ V}$; $V_{GE} \leq 20\text{ V}$; $T_j = 125\text{ °C}$ $V_{CES} < 600\text{ V}$			10	μs
Inverse Diode					
I_F	$T_j = 150\text{ °C}$	$T_s = 25\text{ °C}$		36	A
		$T_s = 80\text{ °C}$		24	A
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$				A
I_{FSM}	$t_p = 10\text{ ms}$; half sine wave $T_j = 150\text{ °C}$			200	A
Freewheeling Diode					
I_F	$T_j = 150\text{ °C}$	$T_{case} = 25\text{ °C}$		36	A
		$T_{case} = 80\text{ °C}$		24	A
I_{FRM}					A
I_{FSM}	$t_p = 10\text{ ms}$; half sine wave $T_j = 150\text{ °C}$			200	A
Module					
$I_{t(RMS)}$					A
T_{vj}				-40 ... +150	$^{\circ}\text{C}$
T_{stg}				-40 ... +125	$^{\circ}\text{C}$
V_{isol}	AC, 1 min.			2500	V

Characteristics			T _s = 25 °C, unless otherwise specified			
Symbol	Conditions		min.	typ.	max.	Units
IGBT						
V _{GE(th)}	V _{GE} = V _{CE} , I _C = 0,7 mA		3	4	5	V
I _{CES}	V _{GE} = 0 V, V _{CE} = V _{CES} T _j = 25 °C		0,0022			mA
I _{GES}	V _{CE} = 0 V, V _{GE} = 20 V T _j = 25 °C		120			nA
V _{CE0}	T _j = 25 °C		1,4			V
	T _j = 125 °C		1,7 2,2			V
r _{CE}	V _{GE} = 15 V T _j = 25°C		44			mΩ
	T _j = 125°C					mΩ
V _{CE(sat)}	I _{Cnom} = 30 A, V _{GE} = 15 V T _j = 25°C _{chiplev.}		1,8			V
	T _j = 125°C _{chiplev.}		2,1			V
C _{ies}	V _{CE} = 25, V _{GE} = 0 V f = 1 MHz		1,6			nF
C _{oes}			0,15			nF
C _{res}			0,09			nF
t _{d(on)}	R _{Gon} = 33 Ω	V _{CC} = 300V I _{Cnom} = 25A	30			ns
t _r			25			ns
E _{on}	R _{Goff} = 33 Ω	T _j = 125 °C V _{GE} = ±15V	0,75			mJ
t _{d(off)}			250			ns
t _f			15			ns
E _{off}			0,6			mJ
R _{th(j-s)}	per IGBT		1,4			K/W

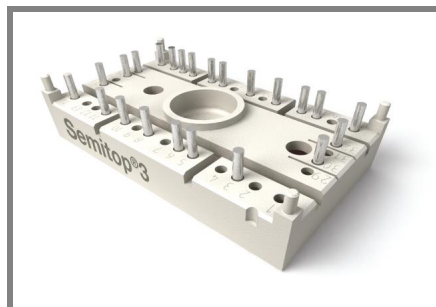

SEMITOP® 3

IGBT Module

SK25MLI065

Target Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- Ultra Fast NPT IGBT technology
- CAL technology FWD


Typical Applications

- Multi level inverter





Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
Antiparallel Diode (D1)					
$V_F = V_{EC}$	$I_{Fnom} = 25 \text{ A}; V_{GE} = 0 \text{ V}$		$T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$ $T_j = 125 \text{ }^\circ\text{C}_{chiplev.}$	1,45 1,4	V V
V_{F0}			$T_j = 25 \text{ }^\circ\text{C}$ $T_j = 125 \text{ }^\circ\text{C}$		V V
r_F			$T_j = 25 \text{ }^\circ\text{C}$ $T_j = 125 \text{ }^\circ\text{C}$		mΩ mΩ
I_{RRM} Q_{rr} E_{rr}	$I_{Fnom} = 25 \text{ A}$ $di/dt = -2400 \text{ A}/\mu\text{s}$ $V_R = 300 \text{ V}$		$T_j = 125 \text{ }^\circ\text{C}$		A μC mJ
$R_{th(j-s)D}$	per diode			1,7	K/W
Freewheeling Diode (D2)					
$V_F = V_{EC}$	$I_{Fnom} = 25 \text{ A}; V_{GE} = 0 \text{ V}$		$T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$ $T_j = 125 \text{ }^\circ\text{C}_{chiplev.}$	1,45 1,4	V V
V_{F0}			$T_j = 125 \text{ }^\circ\text{C}$	0,85	V
r_F			$T_j = 125 \text{ }^\circ\text{C}$	22	V
I_{RRM} Q_{rr} E_{rr}	$I_{Fnom} = 25 \text{ A}$ $di/dt = -2400 \text{ A}/\mu\text{s}$ $V_R = 300 \text{ V}$		$T_j = 125 \text{ }^\circ\text{C}$		A μC mJ
$R_{th(j-s)FD}$	per diode			1,7	K/W
M_s	to heat sink	2,25		2,5	Nm
w				30	g




This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.


This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

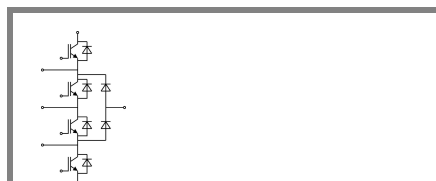


MLI

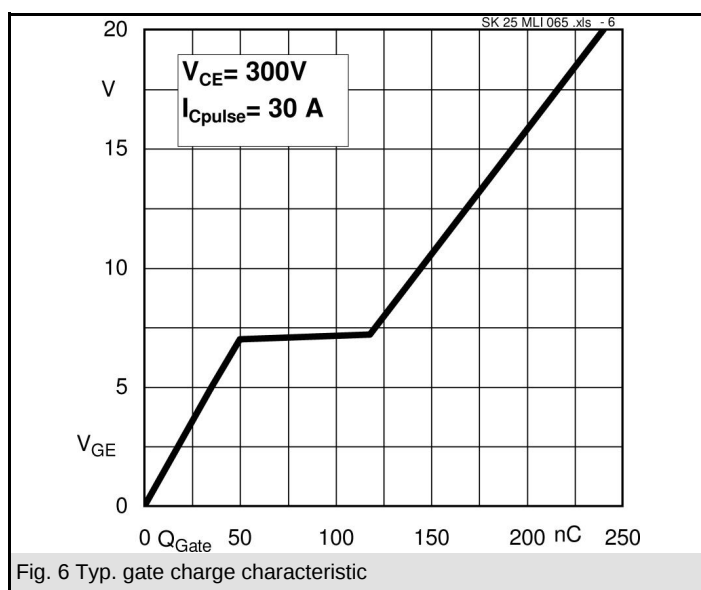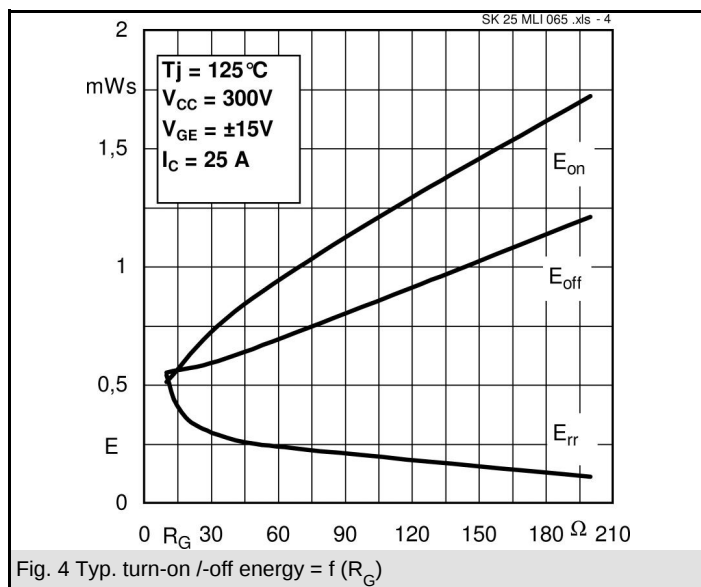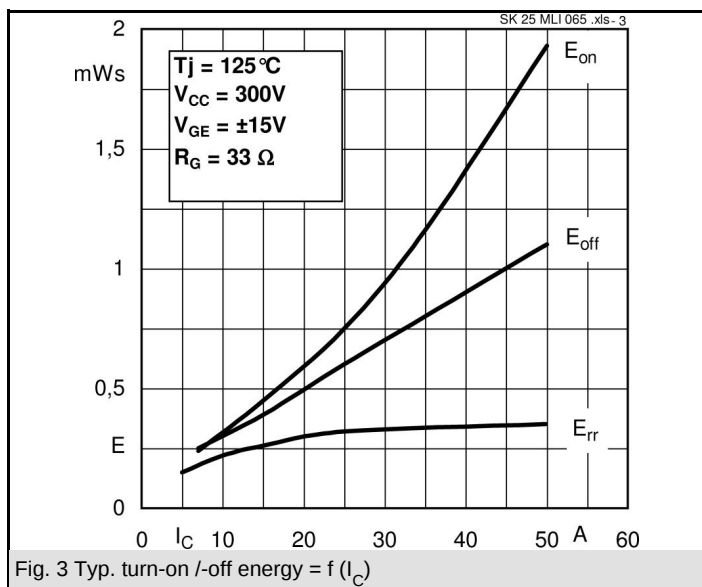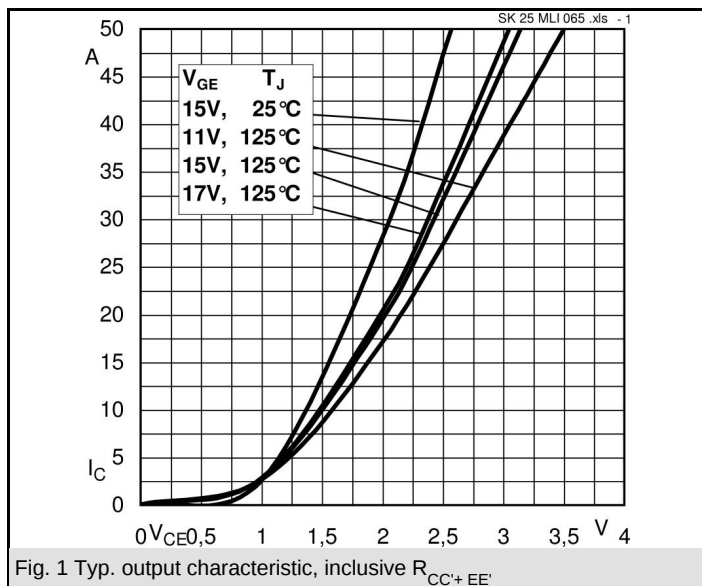

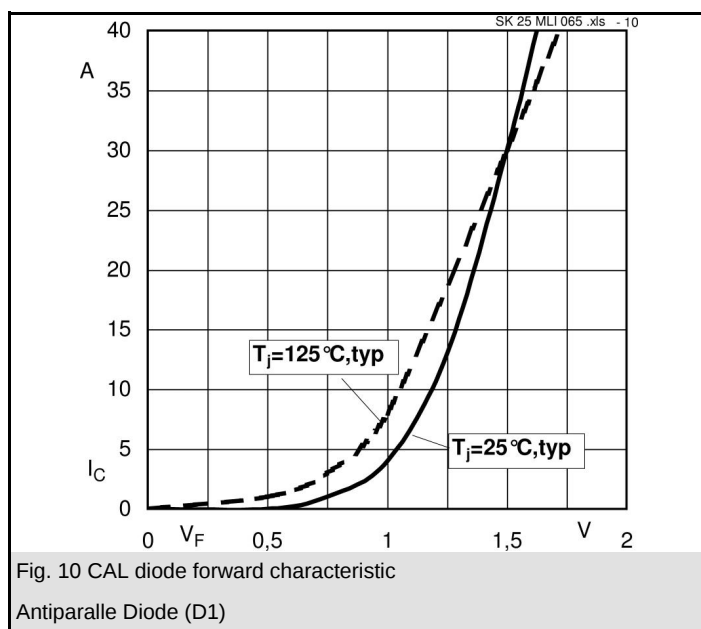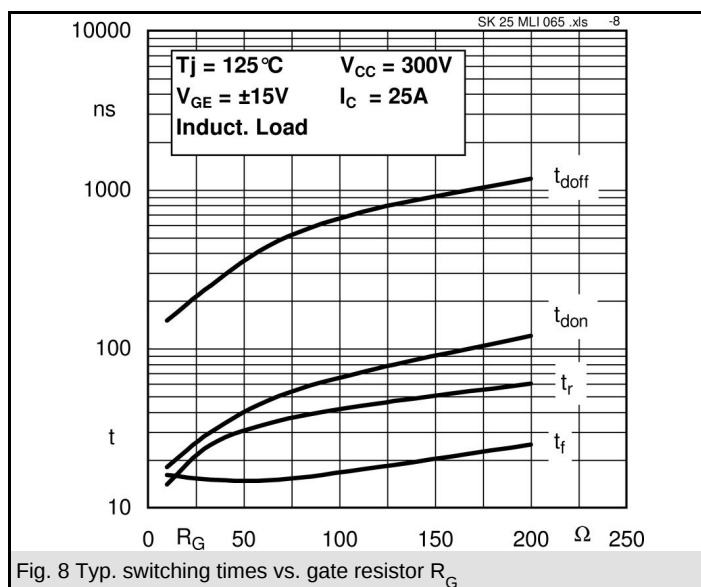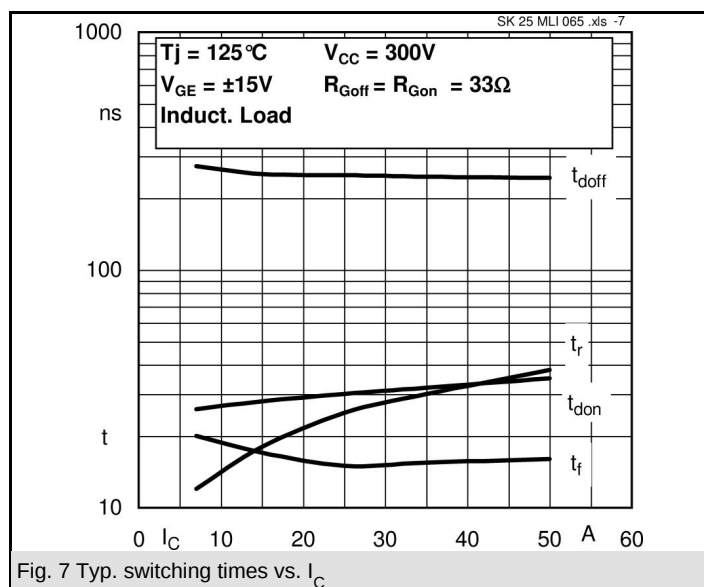

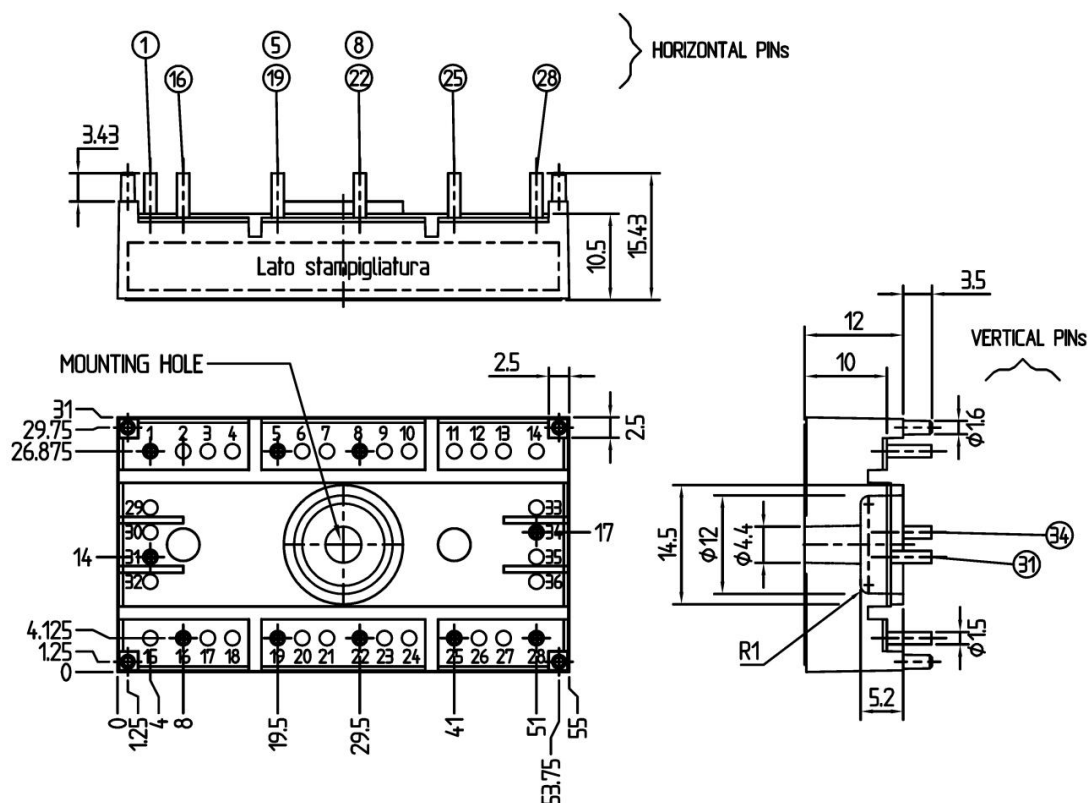

Case T 76 (Suggested hole diameter, in the PCB, for solder pins and plastic mounting pins: 2mm)

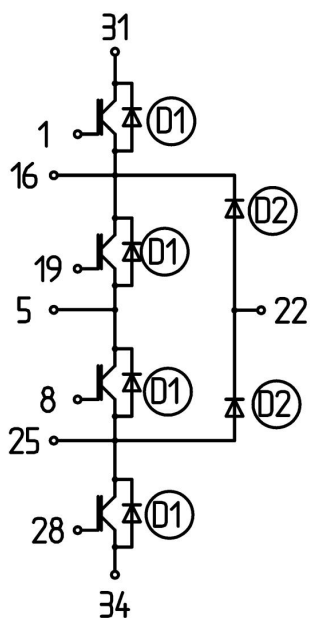

Case T 76

MLI