



SK315C THRU SK320C

SCHOTTKY BARRIER RECTIFIER


Reverse Voltage - 150 to 200 Volts Forward Current - 3.0 Ampere

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Metal silicon junction, majority carrier conduction
- Low reverse leakage
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed:
250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC SMC(DO-214AB) molded plastic body
Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.007 ounce, 0.24grams

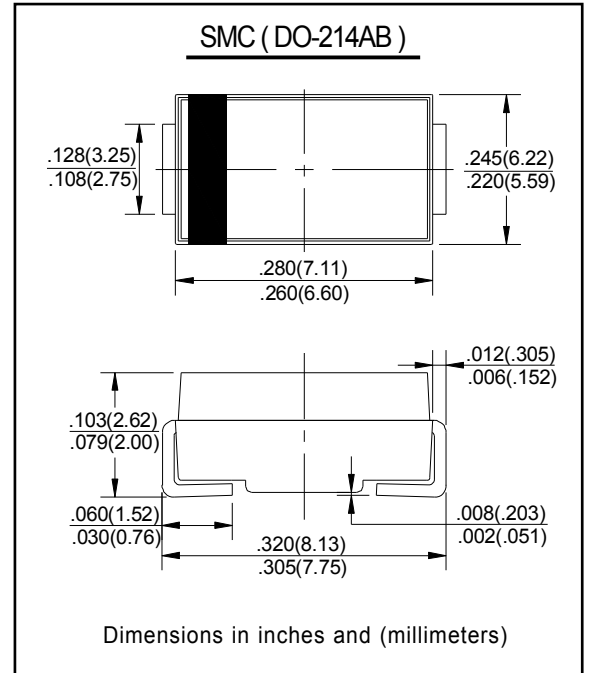

Maximum Ratings and Electrical Characteristics @T_A=25°C unless otherwise specified

Single Phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	SK315C	SK320C	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V _{RRM} V _{RWM} V _R	150	200	V
RMS Reverse Voltage	V _{R(RMS)}	105	140	V
Average Rectified Output Current @T _C = 75°C	I _O	3.0		A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	80		A
Forward Voltage @I _F = 3.0A	V _{FM}	0.92		V
Peak Reverse Current @T _A = 25°C At Rated DC Blocking Voltage @T _A = 100°C	I _{RM}	1.0 5.0		mA
Typical Junction Capacitance (Note 1)	C _j	250		pF
Operating and Storage Temperature Range	T _j , T _{STG}	-65 to +150		°C

Note: 1. Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.



SK315C THRU SK320C

RATINGS AND CHARACTERISTIC CURVES

Fig. 1 Forward Current Derating Curve

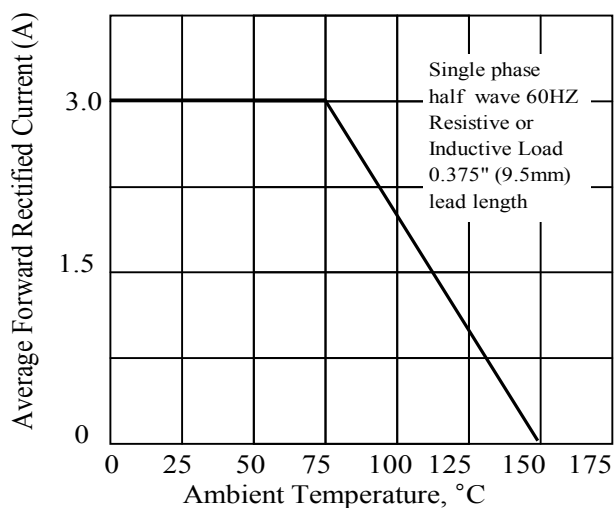


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

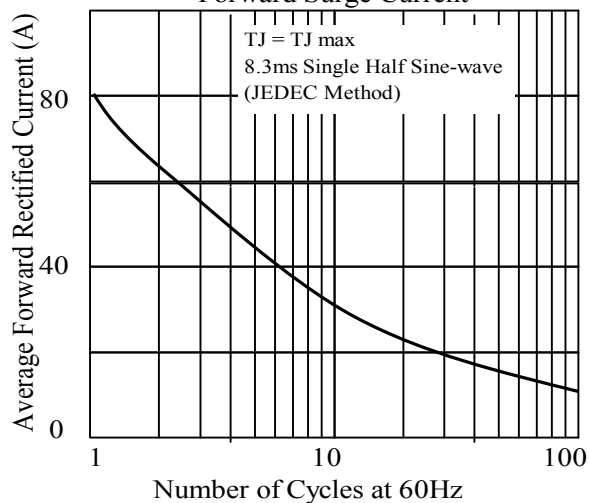


Fig. 3. Typical Instantaneous Forward Characteristics

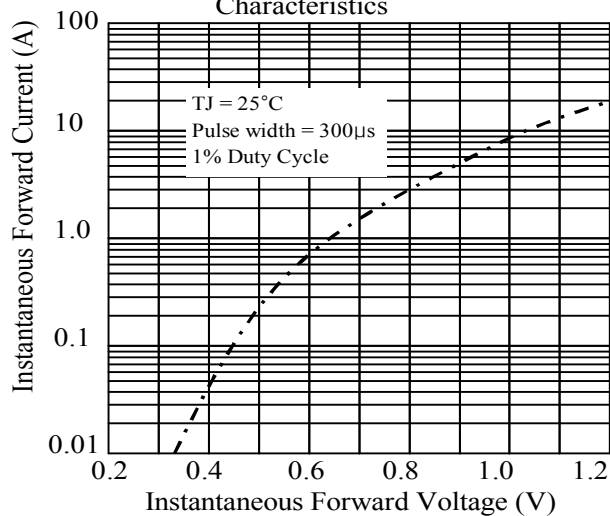


Fig. 4. Typical Reverse Characteristics

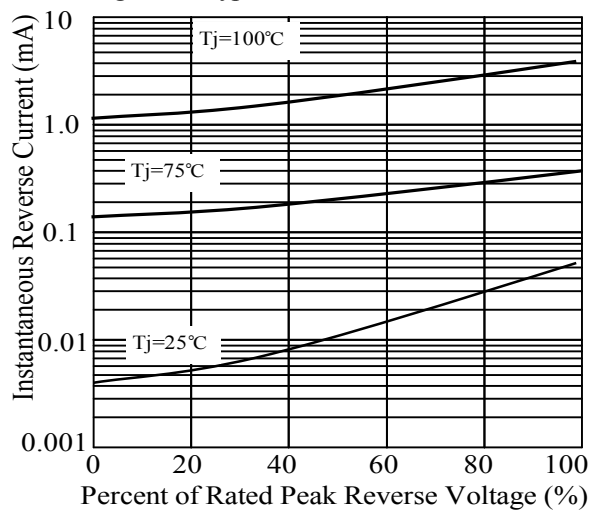


Fig. 5. typical transient thermal impedance

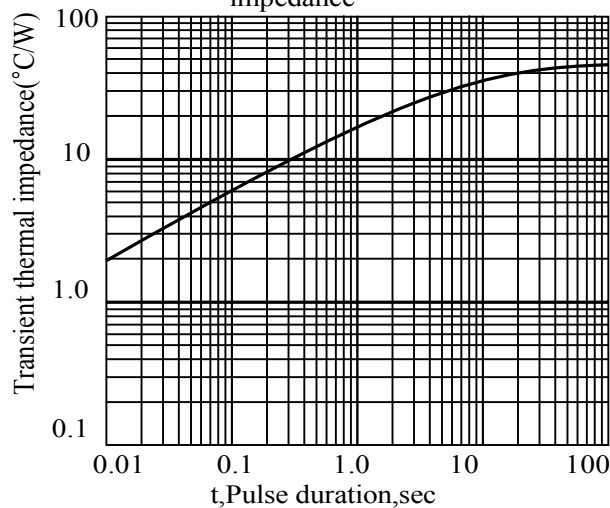


Fig. 6. Typical Junction Capacitance

