


SK 35 D 12 F

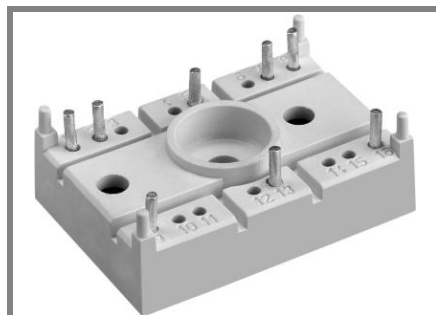

SEMITOP® 2

Bridge Rectifier

SK 35 D 12 F

Preliminary Data

Features


- Compact design
- One screw mounting
- Heat transfer and insulation through direct copper bonded aluminium oxide ceramic (DCB)
- Fast and soft recovery CAL (Controlled Axial Lifetime) diode
- UL recognized, file no. E 63 532

Typical Applications

- General power switching applications
- UPS
- SMPS

V_{RSM} V	V_{RRM}, V_{DRM} V	$I_D = 33 \text{ A (full conduction)}$ ($T_s = 80 \text{ °C}$)
	1200	Sk 35 D 12 F

Symbol	Conditions	Values	Units
I_D	$T_s = 80 \text{ °C}$	33	A
I_{RRM}	$T_{vj} = 125 \text{ °C}$ (See Fig. 6)	typ. 16	A
Q_{rr}	$T_{vj} = 25 \text{ (125) °C}$ (See Fig. 6)	typ. 1,5 (2,7)	μC
I_R	$T_{vj} = 25 \text{ (150) °C}; V_R = V_{RRM}$	0,1 (2)	mA
I_{FSM}	$T_{vj} = 150 \text{ °C}; 10 \text{ ms}$	180	A
i^2t	$T_{vj} = \text{°C}; \text{ms}$	162	A
	$T_{vj} = 150 \text{ °C}; 10 \text{ ms}$		A^2s
	$T_{vj} = \text{°C}; \text{ms}$		A^2s
V_F	$T_{vj} = 25 \text{ °C}; I_F = 15 \text{ A}$	max. 2,5	V
$V_{(TO)}$	$T_{vj} = 125 \text{ °C}$	max. 1,2	V
r_T	$T_{vj} = 125 \text{ °C}$	max. 75	$\text{m}\Omega$
I_{RD}	$T_{vj} = \text{°C}; V_{DD} = V_{DRM}; V_{RD} = V_{RRM}$		mA mA
$R_{th(j-s)}$	per diode per module	1,7 0,283	K/W K/W
T_{solder}	terminals, 10s	260	°C
T_{vj}		-40...+150	°C
T_{stg}		-40...+125	°C
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3000 (2500)	V
M_s	mounting torque to heatsink	2	Nm
M_t			
m	approx. weight	21	g
Case	SEMITOP® 2	T 7	

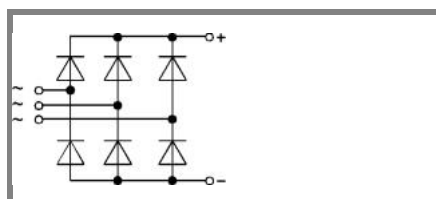

D

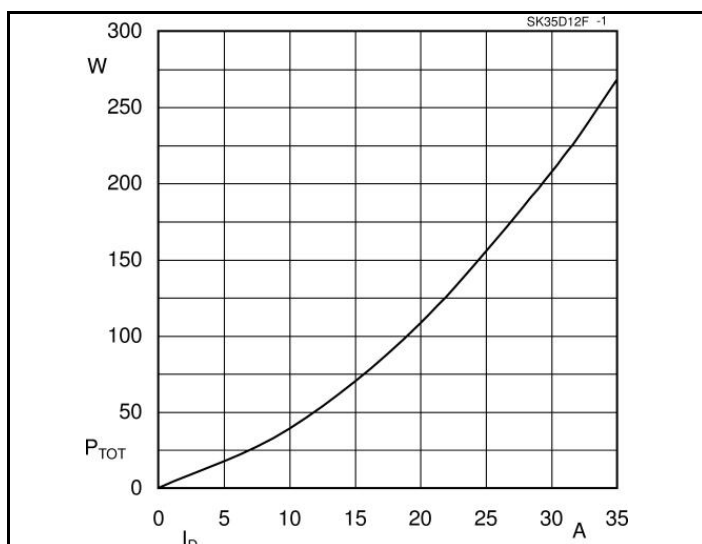


Fig. 1 Power dissipation vs. Output current

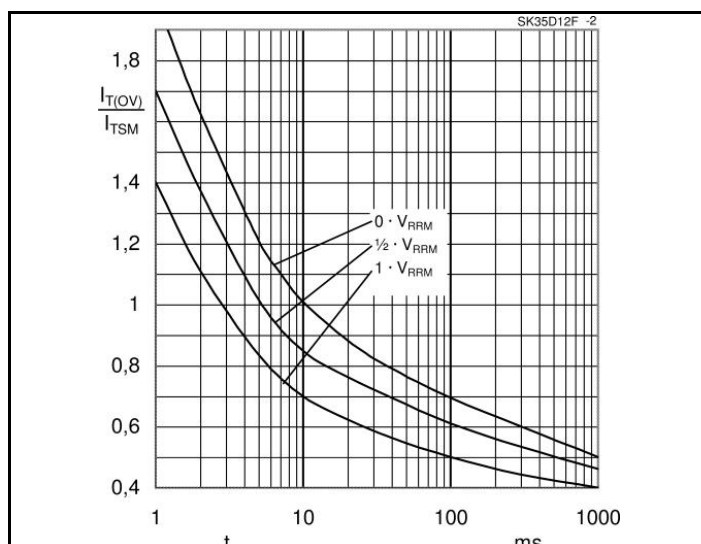


Fig. 2 Surge overload current vs. time

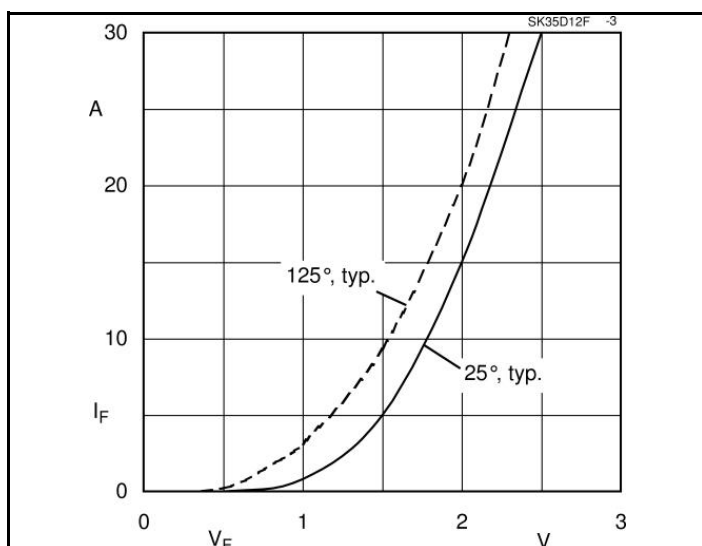


Fig. 3 Forward characteristics of single diode

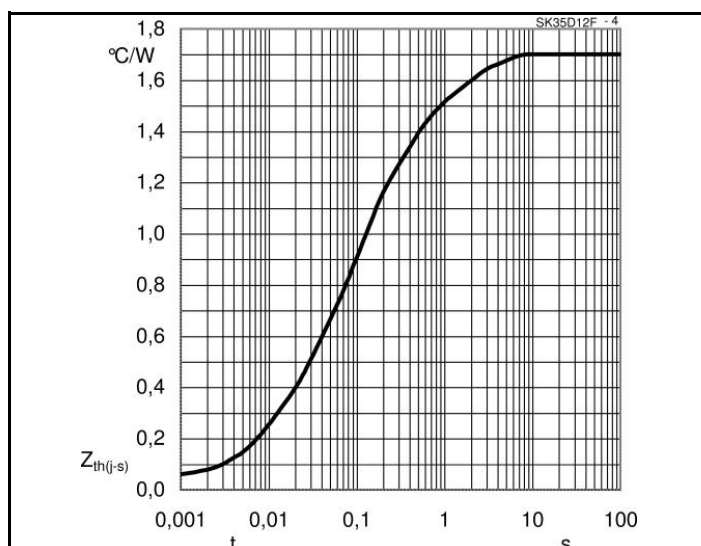


Fig. 4 Thermal transient impedance vs. time

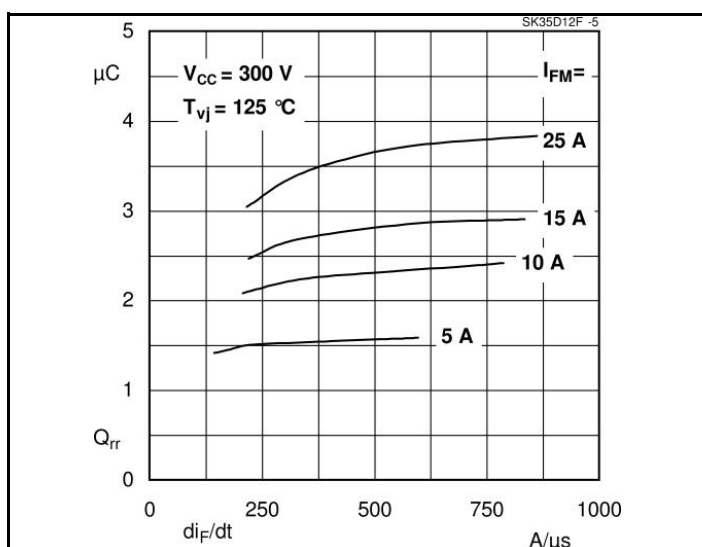


Fig. 5 Typ. reverse recovery charge $Q_{rr} = f(di_F/dt)$



Measurement conditions for switching parameters:

$I_F = 15A$

$V_R = 600V$

$-di/dt = 400A/\mu s$

Fig. 6

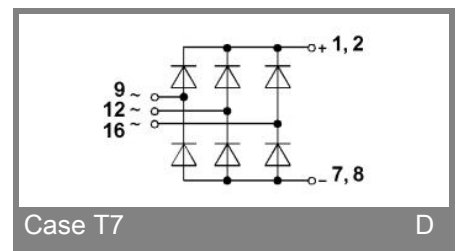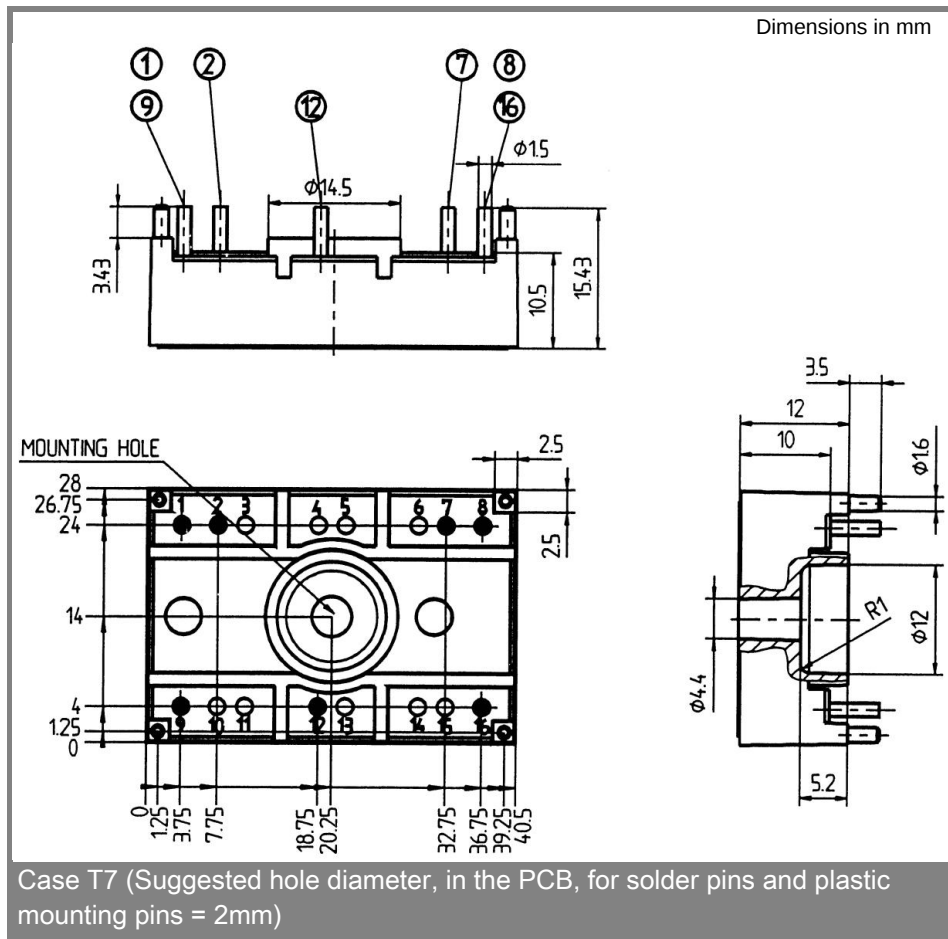

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.