

SEMITOP® 3

IGBT Module

SK50MLI065


Target Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- Ultra Fast NPT IGBT technology
- CAL technology FWD

Typical Applications*


- Multi level inverter



MLI

Absolute Maximum Ratings				$T_s = 25\text{ °C}$, unless otherwise specified	
Symbol	Conditions			Values	Units
IGBT					
V_{CES}	$T_j = 25\text{ °C}$			600	V
I_C	$T_j = 125\text{ °C}$	$T_s = 25\text{ °C}$		54	A
		$T_s = 80\text{ °C}$		40	A
I_{CRM}	$I_{CRM} = 2 \times I_{Cnom}$			120	A
V_{GES}				± 20	V
t_{psc}	$V_{CC} = 300\text{ V}$; $V_{GE} \leq 20\text{ V}$; $T_j = 125\text{ °C}$ $V_{CES} < 600\text{ V}$			10	μs
Inverse Diode					
I_F	$T_j = 150\text{ °C}$	$T_s = 25\text{ °C}$		36	A
		$T_s = 80\text{ °C}$		24	A
I_{FRM}	$I_{FRM} = 2 \times I_{Fnom}$				A
I_{FSM}	$t_p = 10\text{ ms}$; half sine wave $T_j = 150\text{ °C}$			200	A
Freewheeling Diode					
I_F	$T_j = 150\text{ °C}$	$T_{case} = 25\text{ °C}$		64	A
		$T_{case} = 80\text{ °C}$		42	A
I_{FRM}					A
I_{FSM}	$t_p = 10\text{ ms}$; half sine wave $T_j = 150\text{ °C}$			440	A
Module					
$I_{t(RMS)}$					A
T_{vj}				-40 ... +150	$^{\circ}\text{C}$
T_{stg}				-40 ... +125	$^{\circ}\text{C}$
V_{isol}	AC, 1 min.			2500	V

Characteristics			T _s = 25 °C, unless otherwise specified			
Symbol	Conditions		min.	typ.	max.	Units
IGBT						
V _{GE(th)}	V _{GE} = V _{CE} , I _C = 1,4 mA		3	4	5	V
I _{CES}	V _{GE} = 0 V, V _{CE} = V _{CES} T _j = 25 °C		0,0044			mA
I _{GES}	V _{CE} = 0 V, V _{GE} = 20 V T _j = 25 °C		240			nA
V _{CE0}	T _j = 25 °C		1,4			V
	T _j = 125 °C		1,7 2,2			V
r _{CE}	V _{GE} = 15 V T _j = 25°C		22			mΩ
	T _j = 125°C					mΩ
V _{CE(sat)}	I _{Cnom} = 60 A, V _{GE} = 15 V T _j = 25°C _{chiplev.}		1,8			V
	T _j = 125°C _{chiplev.}		2,1			V
C _{ies}	V _{CE} = 25, V _{GE} = 0 V f = 1 MHz		3,2			nF
C _{oes}			0,3			nF
C _{res}			0,18			nF
t _{d(on)}	R _{Gon} = 15 Ω	V _{CC} = 300V I _C = 40A	60			ns
t _r			30			ns
E _{on}	R _{Goff} = 15 Ω	T _j = 125 °C V _{GE} =±15V	1,07			mJ
t _{d(off)}			223			ns
t _f			20			ns
E _{off}			0,76			mJ
R _{th(j-s)}	per IGBT		0,85			K/W

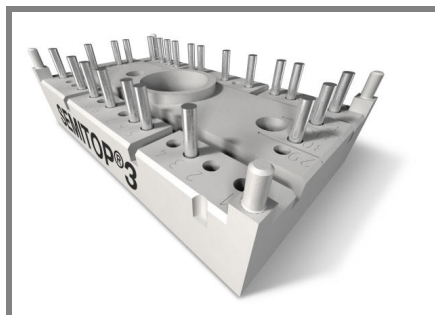

SEMITOP® 3

IGBT Module

SK50MLI065

Target Data

Features

- Compact design
- One screw mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- Ultra Fast NPT IGBT technology
- CAL technology FWD


Typical Applications*

- Multi level inverter





Characteristics					
Symbol	Conditions	min.	typ.	max.	Units
Antiparallel Diode (D1)					
$V_F = V_{EC}$	$I_{Fnom} = 25 \text{ A}; V_{GE} = 0 \text{ V}$		$T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$ $T_j = 125 \text{ }^\circ\text{C}_{chiplev.}$	1,45 1,4	V V
V_{F0}			$T_j = 25 \text{ }^\circ\text{C}$ $T_j = 125 \text{ }^\circ\text{C}$		V V
r_F			$T_j = 25 \text{ }^\circ\text{C}$ $T_j = 125 \text{ }^\circ\text{C}$		mΩ mΩ
I_{RRM} Q_{rr} E_{rr}	$I_F = 50 \text{ A}$ $di/dt = -2400 \text{ A}/\mu\text{s}$ $V_R = 300\text{V}$		$T_j = 125 \text{ }^\circ\text{C}$		A μC mJ
$R_{th(j-s)D}$	per diode			1,7	K/W
Freewheeling Diode (D2)					
$V_F = V_{EC}$	$I_{Fnom} = 50 \text{ A}; V_{GE} = 0 \text{ V}$		$T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$ $T_j = 125 \text{ }^\circ\text{C}_{chiplev.}$	1,45 1,4	V V
V_{F0}			$T_j = 125 \text{ }^\circ\text{C}$	0,85	V
r_F			$T_j = 125 \text{ }^\circ\text{C}$	11	V
I_{RRM} Q_{rr} E_{rr}	$I_F = 50 \text{ A}$ $di/dt = -2400 \text{ A}/\mu\text{s}$ $V_R = 300\text{V}$		$T_j = 125 \text{ }^\circ\text{C}$		A μC mJ
$R_{th(j-s)FD}$	per diode			1,1	K/W
M_s	to heat sink	2,25		2,5	Nm
w				30	g




This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.


* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our personal.

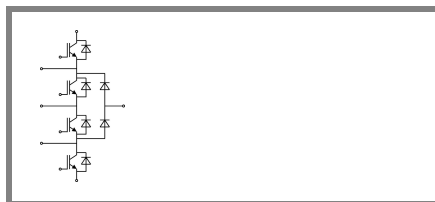


MLI

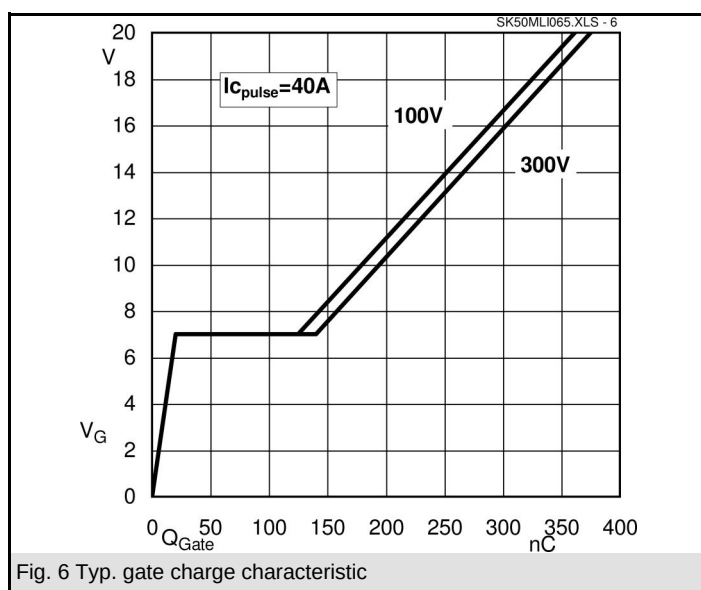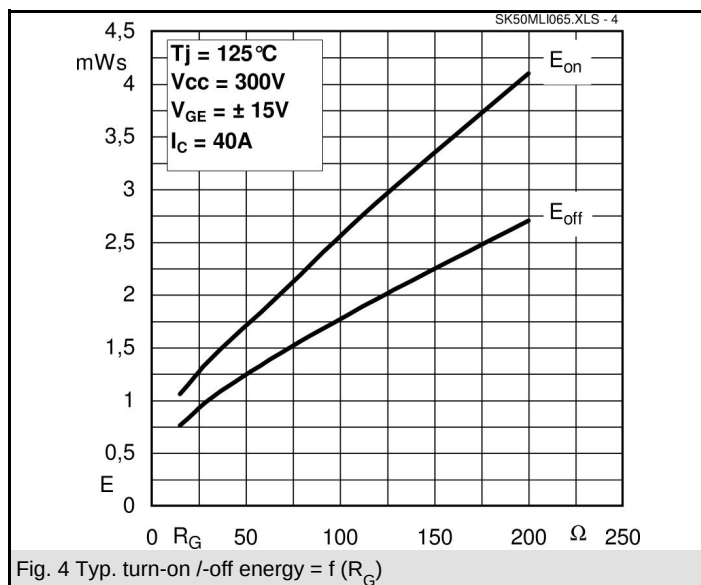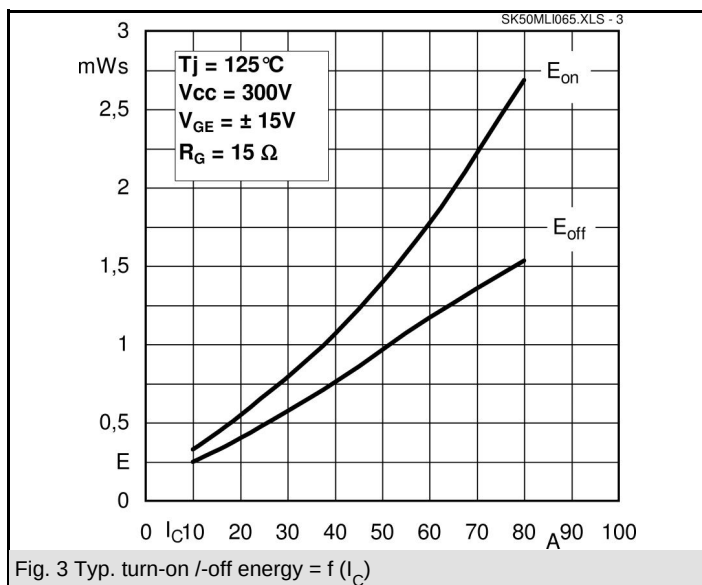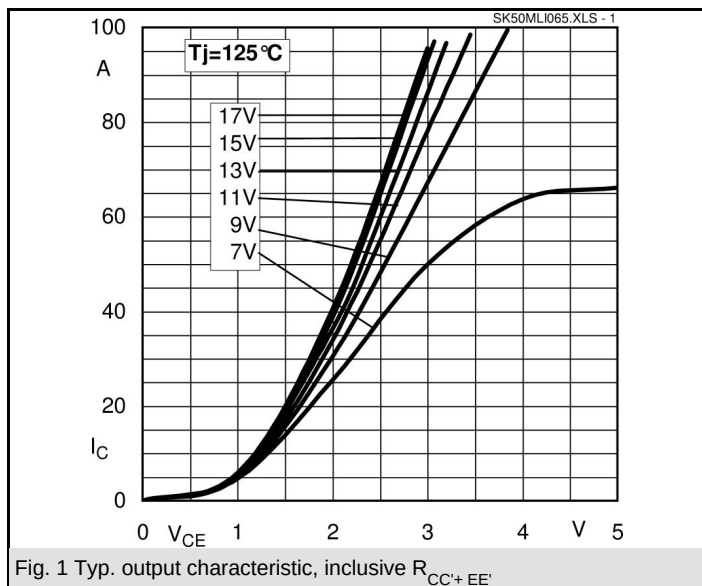

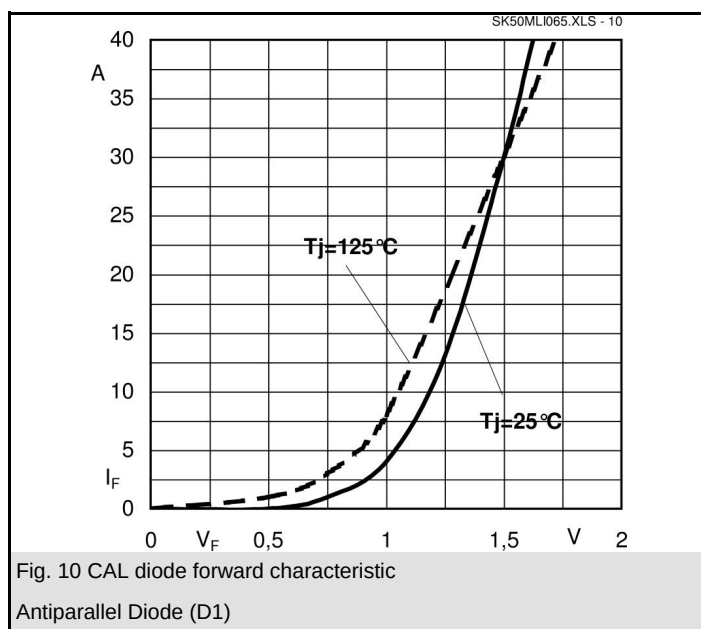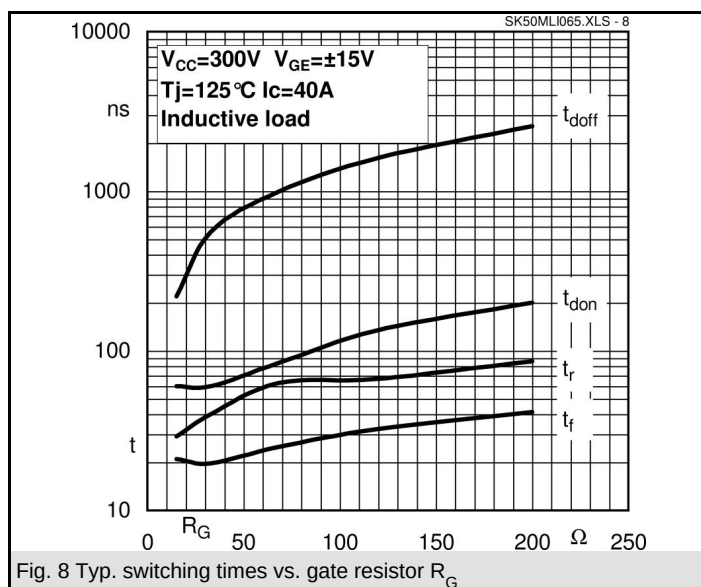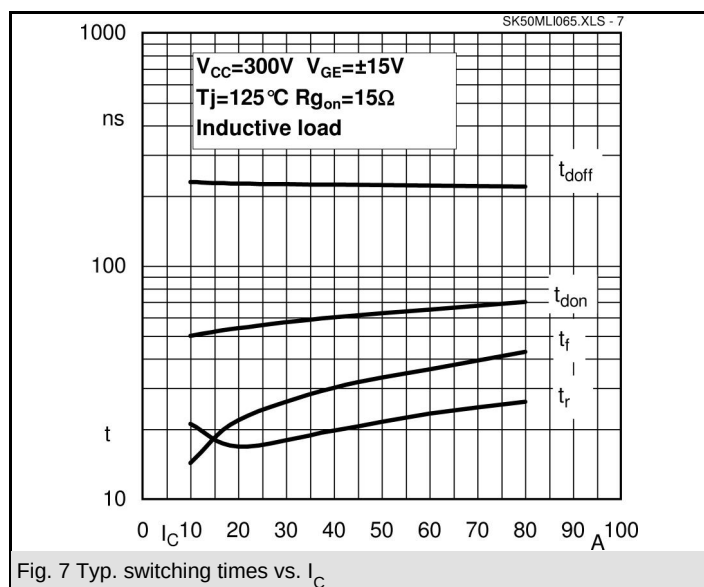

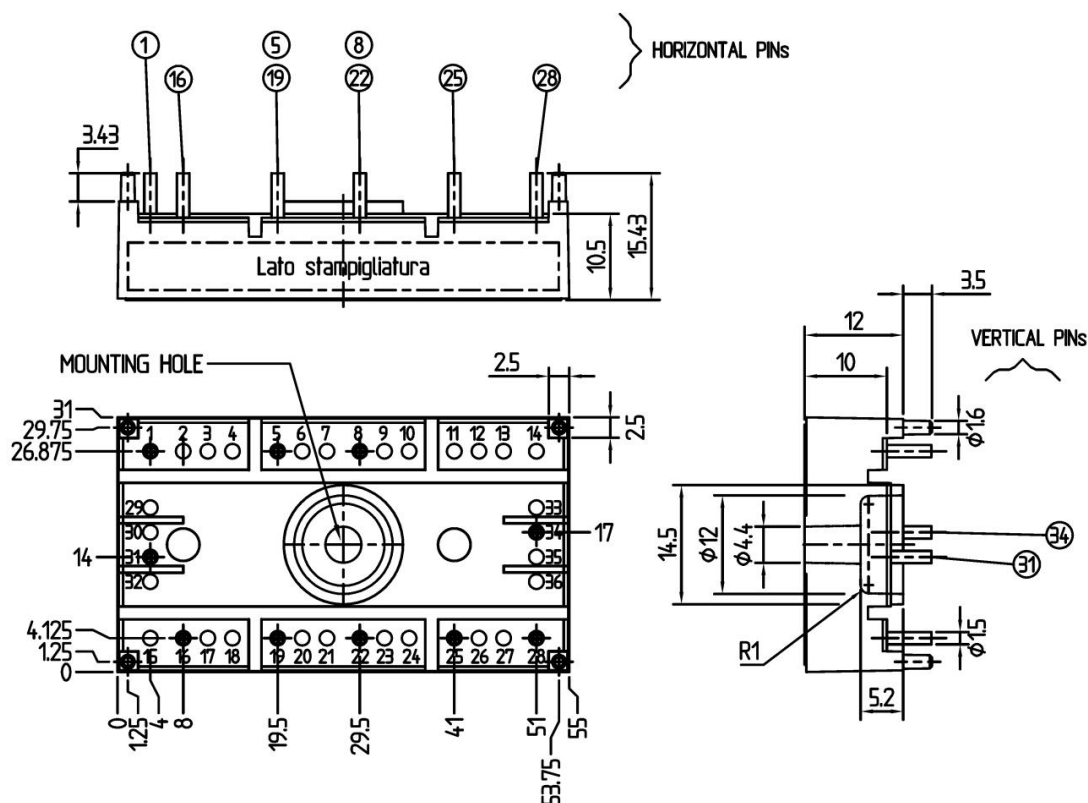

Case T 76 (Suggested hole diameter, in the PCB, for solder pins and plastic mounting pins: 2mm)

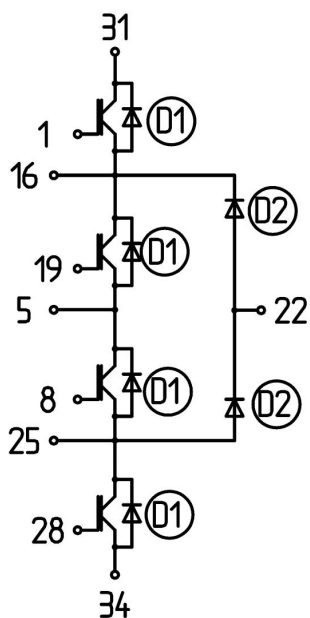

Case T 76

MLI