


# SKD 146/..-L75

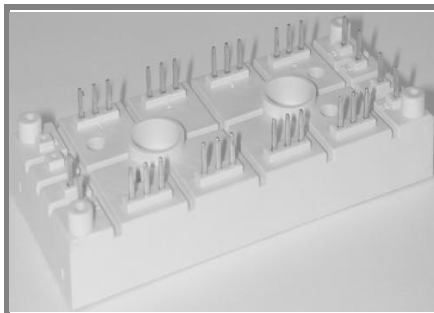

**SEMIPONT™ 6**

## 3-Phase Bridge Rectifier + IGBT braking chopper

**SKD 146/..-L75**

Preliminary Data

### Features

- Compact design
- Two screws mounting
- Heat transfer and isolation through direct copper bonded aluminium oxide ceramic (DCB)
- High surge currents
- Up to 1600V reverse voltage
- UL recognized, file no. E 63 532

### Typical Applications







- DC drives
- Controlled filed rectifiers for DC motors
- Controlled battery charger





$V_{RSM}$ V	$V_{RRM}, V_{DRM}$ V	$I_D = 140$ A (maximum value for continuous operation) ( $T_s = 85$ °C)
1200	1300	SKD 146/12-L75
1600	1700	SKD 146/16-L75

Absolute Maximum Ratings		$T_s = 25$ °C, unless otherwise specified		
Symbol	Conditions	Values	Units	
<b>Bridge - Rectifier</b>				
$I_D$	$T_s = 85$ °C; inductive load	140	A	
$I_{FSM}/I_{TSM}$	$t_p = 10$ ms; $\sin 180^\circ$ ; $T_{jmax}$	1250	A	
$i^2t$	$t_p = 10$ ms; $\sin 180^\circ$ ; $T_{jmax}$	7800	A <sup>2</sup> s	
<b>IGBT - Chopper</b>				
$V_{CES}/V_{GES}$		1200 / 20	V	
$I_C$	$T_s = 25$ (70) °C	100 (75)	A	
$I_{CM}$	$t_p = 1$ ms; $T_s = 25$ (70) °C	200 (150)	A	
<b>Freewheeling - CAL Diode</b>				
$V_{RRM}$		1200	V	
$I_F$	$T_s = 25$ (70) °C	90 (70)	A	
$I_{FM}$	$t_p = 1$ ms; $T_s = 25$ (70) °C	180 (140)	A	
$T_{vj}$	Diode & IGBT (Thyristor)	- 40 ... + 150 (0 ... + 125)	°C	
$T_{stg}$		- 40 ... + 125	°C	
$T_{solder}$	terminals, 10 s	260	°C	
$V_{isol}$	a.c. (50) Hz, RMS 1 min. / 1 s	3000 / 3600	V	

Characteristics		$T_s = 25$ °C, unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
<b>Diode - Rectifier</b>					
$V_{TO} / r_t$	$T_j = 125$ °C		0,8 / 4		V / mΩ
$R_{th(j-s)}$	per diode			0,8	K/W
<b>IGBT - Chopper</b>					
$V_{CE(sat)}$	$I_C = 75$ A, $T_j = 25$ °C; $V_{GE} = 15$ V		2,35		V
$R_{th(j-s)}$	per IGBT			0,4	K/W
$t_{d(on)} / t_r$	valid for all values:		113,8 / 94,4		ns
$t_{d(off)} / t_f$	$V_{CC} = 600$ V; $V_{GE} = 15$ V; $I_C = 90$ A; $T_j = 125$ °C;		845,4 / 94,4		ns
$E_{on} + E_{off}$	$T_j = 125$ °C; $R_G = 16$ Ω; inductive load		18,3		mJ
<b>CAL - Diode - Freewheeling</b>					
$V_{T(TO)} / r_t$	$T_j = 125$ °C		1 / 11	1,2 / 15	V / mΩ
$R_{th(j-s)}$	per diode			0,8	K/W
$I_{RRM}$	valid for all values:		75		A
$Q_{rr}$	$I_F = 75$ A; $V_R = - -600$ V; $di_F/dt = - -800$ A/μs		11		μC
$E_{off}$	$V_{GE} = 0$ V; $T_j = 125$ °C				mJ
<b>Temperature Sensor</b>					
$R_{TS}$	$T = 25$ (100) °C;		1000 (1670)		Ω
<b>Mechanical data</b>					
$M_S$	mounting Torque		2,55	3,45	Nm

D

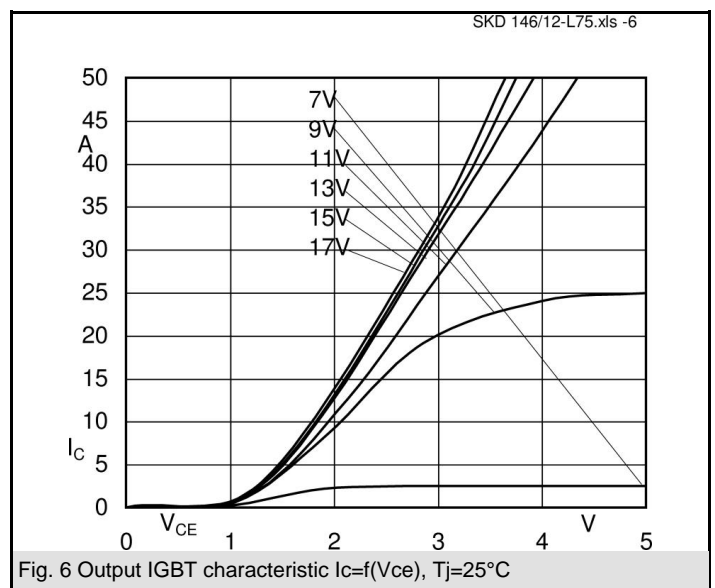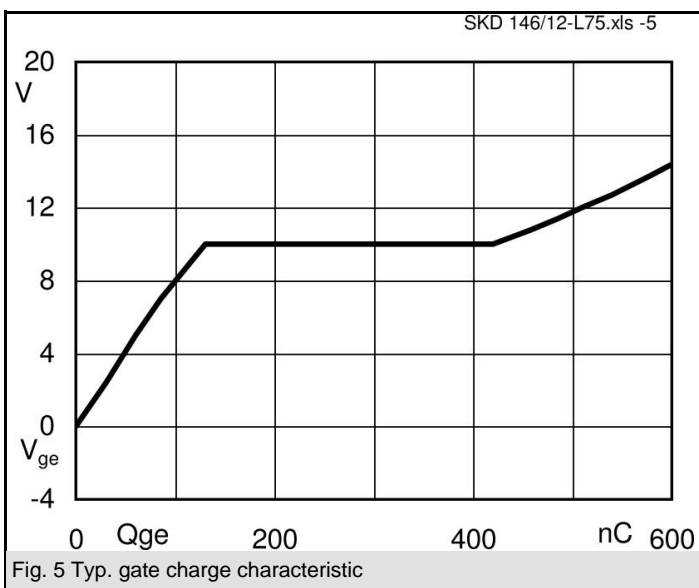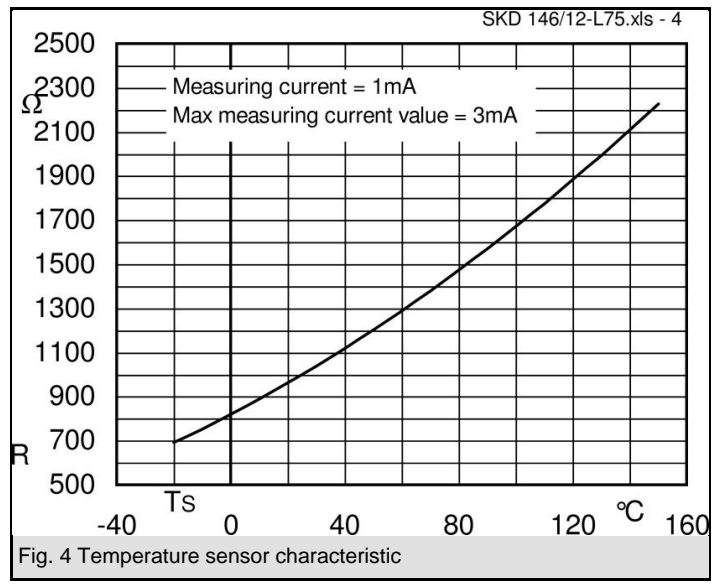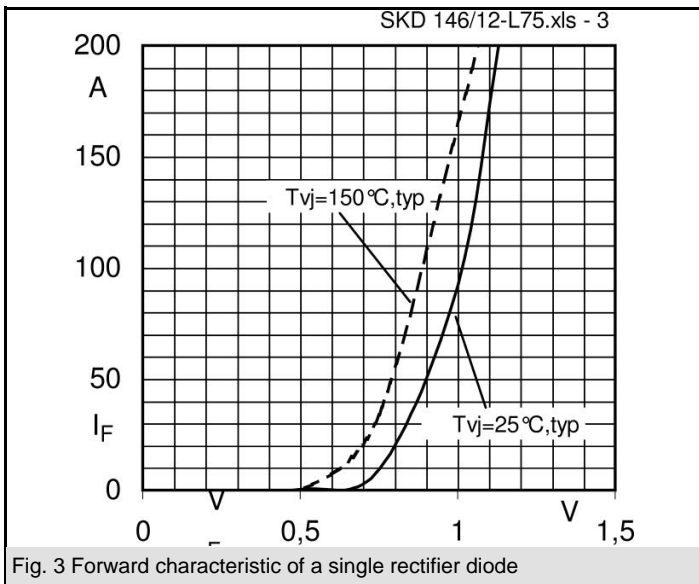
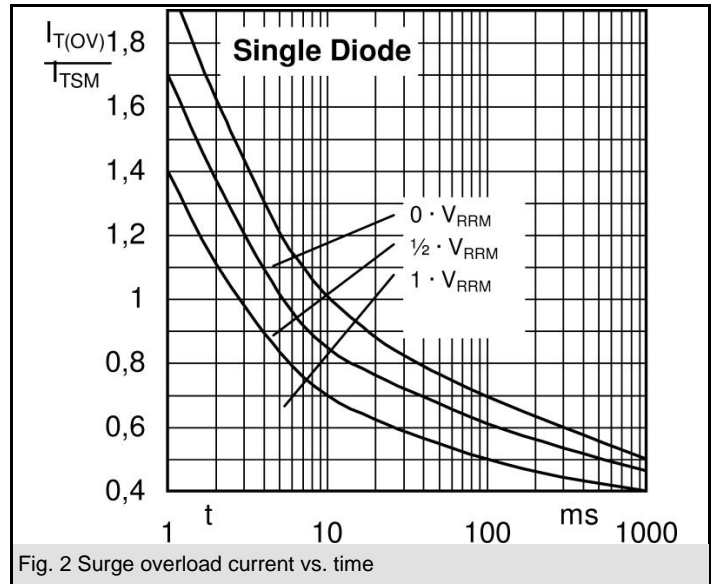
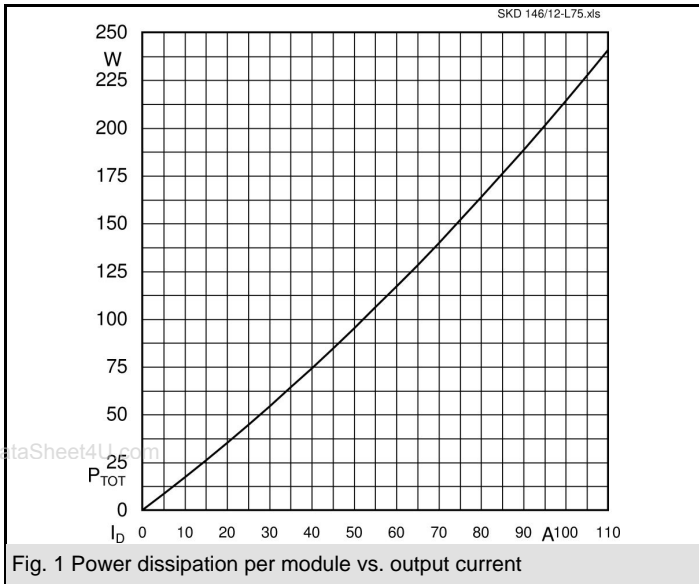


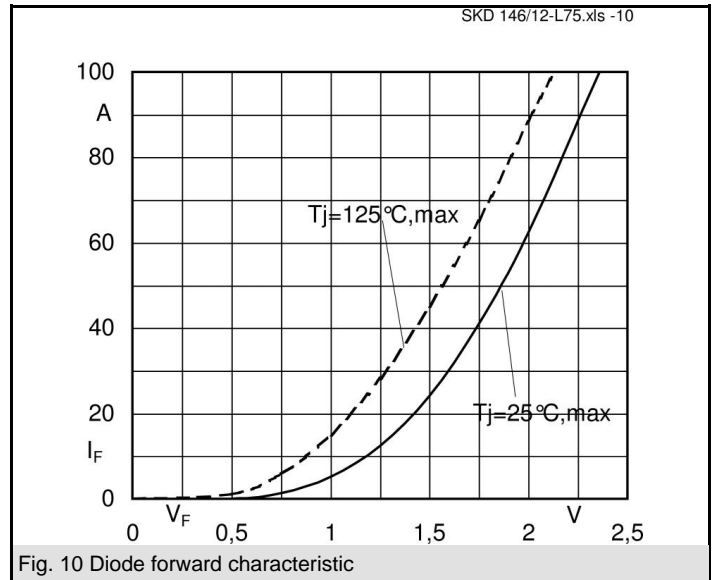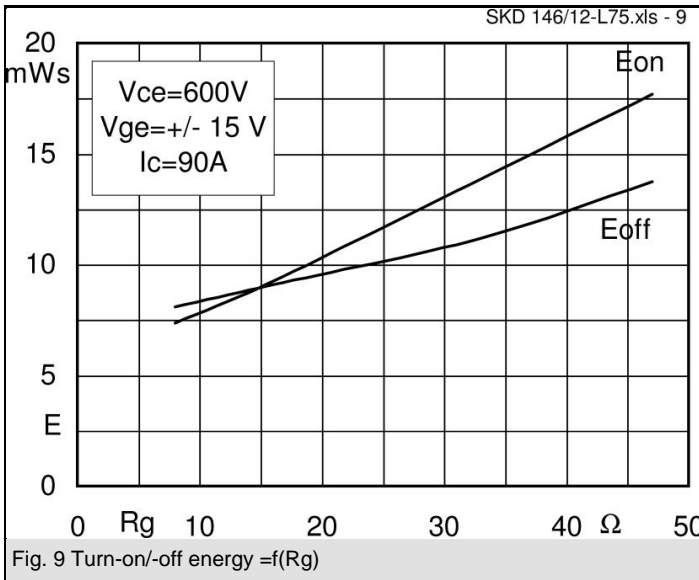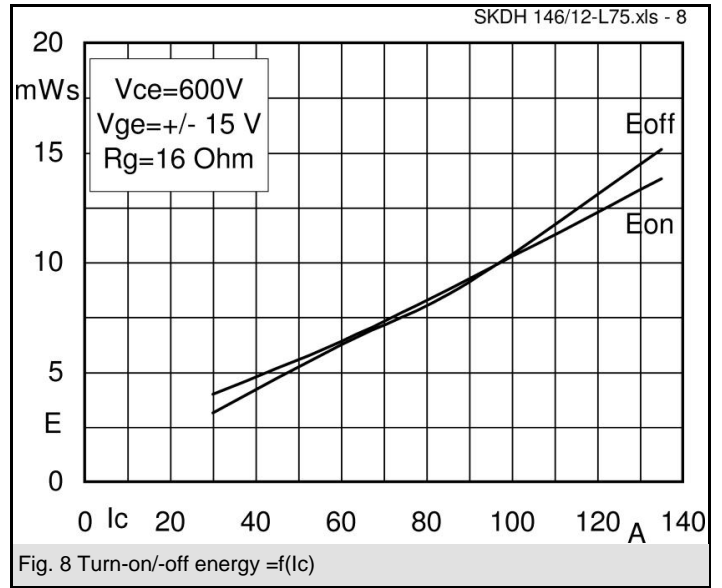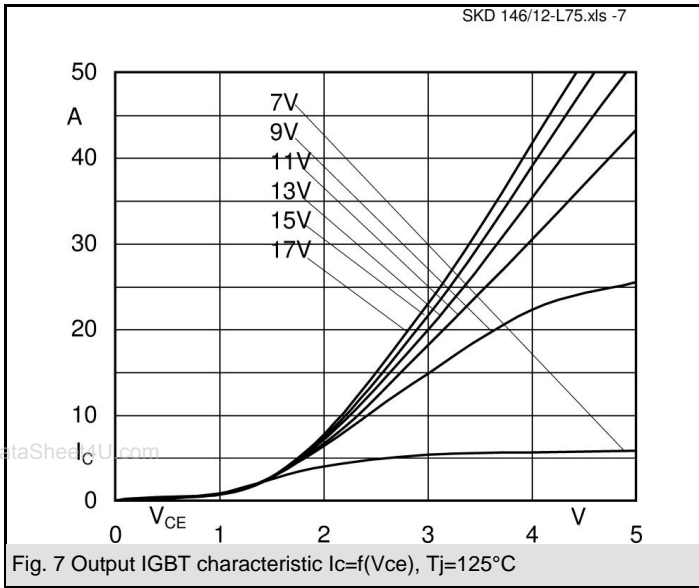


# SKD 146/..-L75

UL recognized  
File n&#176; E63 532

Dimensions in mm

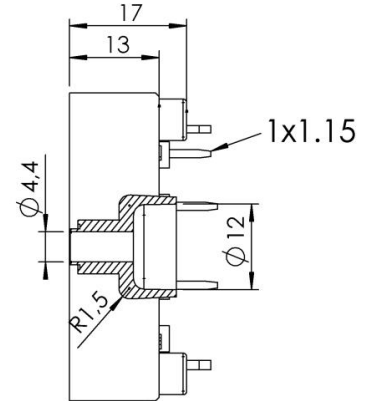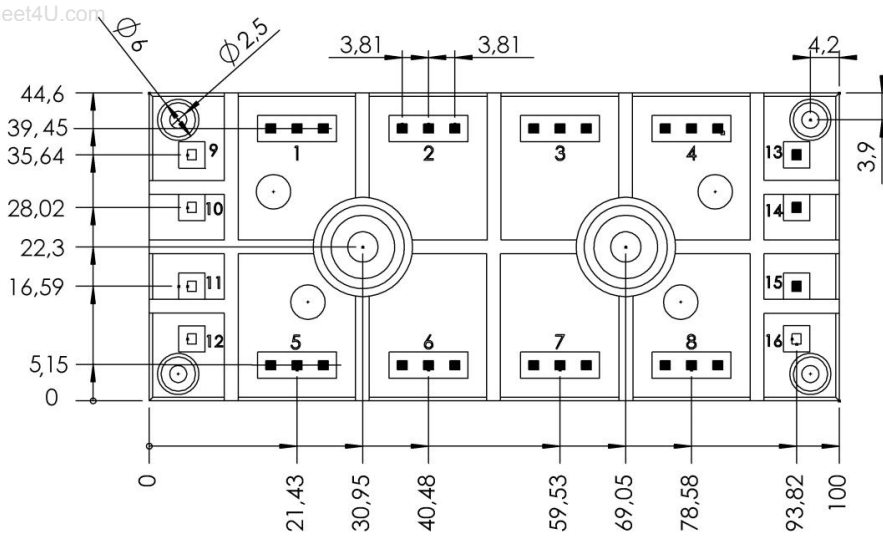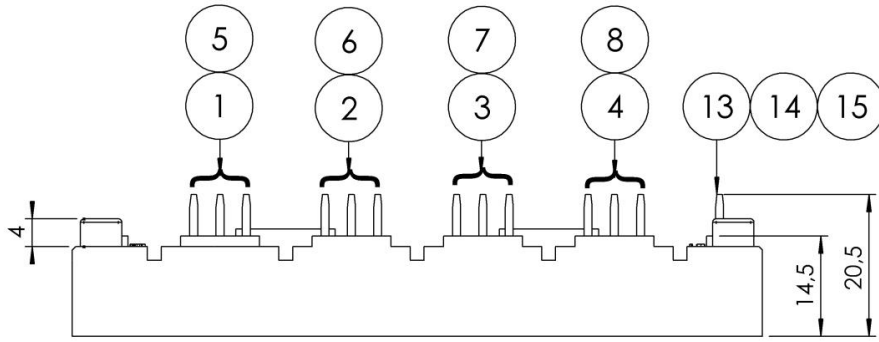

Case G 60

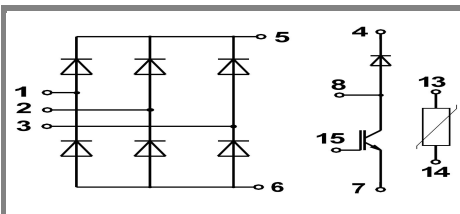

Case G 60

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.