


V _(BR) min.	I _{FRMS} (maximum values for continuous operation)								
	2,5 A			3 A			5 A		
	I _{FAV} (sin. 180; T _{amb} = 45 °C)								
	1,2 A			1,3 A			2,5 A		
V	Types	C _{max.} μF	R _{min.} Ω	Types	C _{max.} μF	R _{min.} Ω	Types	C _{max.} μF	R _{min.} Ω
1300	SKEa 1/13	400	6	SKSa 1/13	800	3	SKEa 2,5/13	1600	2
1700	SKEa 1/17	200	10	SKSa 1/17	400	6	SKEa 2,5/17	800	4

Symbol	Conditions	SKEa 1	SKSa 1	SKEa 2,5
I _{FAV}	sin. 180; T _{amb} = 45 °C	1,2 A	1,3 A	2,5 A
I _{FCL}	T _{amb} = 45 °C	1,0 A	1,1 A	2,0 A
I _{FSM}	T _{vj} = 25 °C; 10 ms	60 A	175 A	190 A
I ² t	T _{vj} = 150 °C	50 A	150 A	160 A
	T _{vj} = 25 °C	18 A ² s	100 A ² s	180 A ² s
	T _{vj} = 150 °C	12,5 A ² s	70 A ² s	130 A ² s
Q _{rr}	T _{vj} = 150 °C; -di _F /dt = 10 A/μs; typ.	10 μC	15 μC	15 μC
I _R	T _{vj} = 25 °C; V _R < V _{BR}	4 μA	4 μA	4 μA
P _{RSM}	T _{vj} = 150 °C; V _R < V _{BR}	0,6 mA	0,6 mA	0,6 mA
	T _{vj} = 150 °C; t = 10 μs	1000 W	2000 W	3000 W
V _F	T _{vj} = 25 °C; I _F = 10 A; max.	1,6 V	1,3 V	1,2 V
V _(TO)	T _{vj} = 150 °C	0,85 V	0,85 V	0,85 V
r _T	T _{vj} = 150 °C	90 mΩ	50 mΩ	30 mΩ
R _{thja}		80 °C/W	80 °C/W	40 °C/W
T _{vj}			-40 ... +150 °C	
T _{stg}			-55 ... +150 °C	
a		5·9,81 m/s ²		
w	approx.	1 g	1 g	2 g
RC	P _R = 1 W	0,01 μF+ 500 Ω	0,01 μF+ 500 Ω	0,02 μF+ 500 Ω
R _p	P _R = 2 W	270 kΩ	270 kΩ	270 kΩ
Case		E 3	E 3	E 4

Avalanche Rectifier Diodes

SKEa 1
SKSa 1
SKEa 2,5






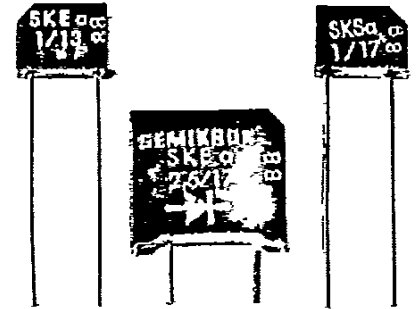






Features

- Avalanche type reverse characteristics
- Minimum avalanche breakthrough voltages 1300 V and 1700 V
- Transient voltage proof within specified limits
- Radial leads with 7,5 and 10 mm pitch
- Polarity indicated by oblique edge

Typical Applications

- DC supply for magnets or solenoids (brakes, valves, etc.)
- Series connections for high voltage applications (dust precipitators)

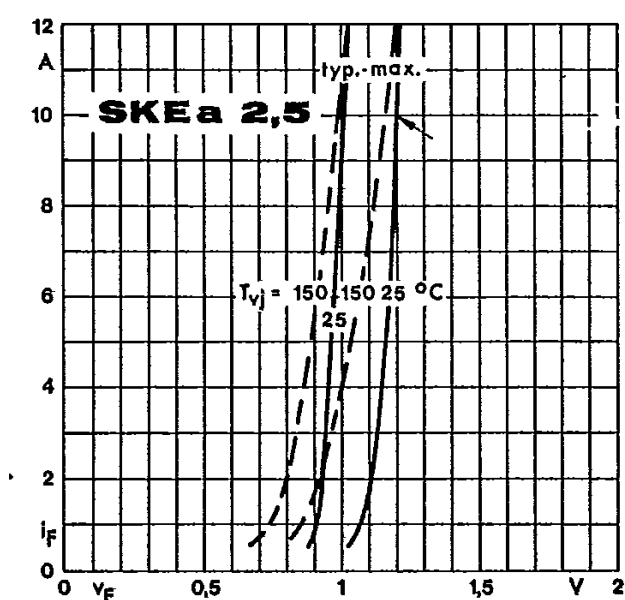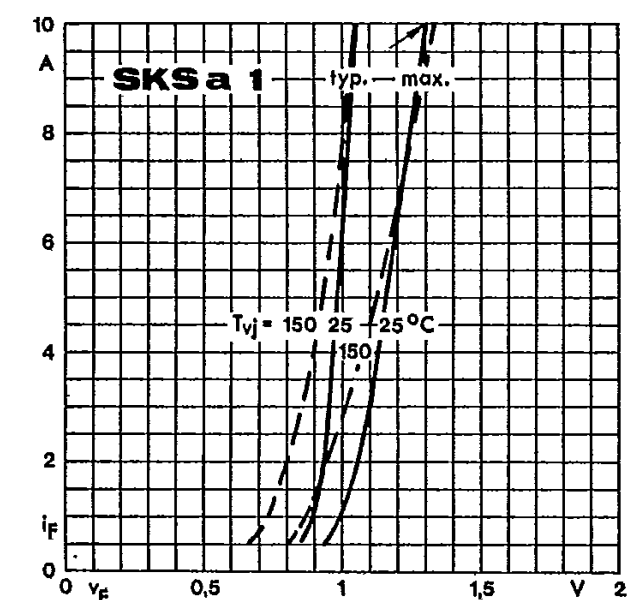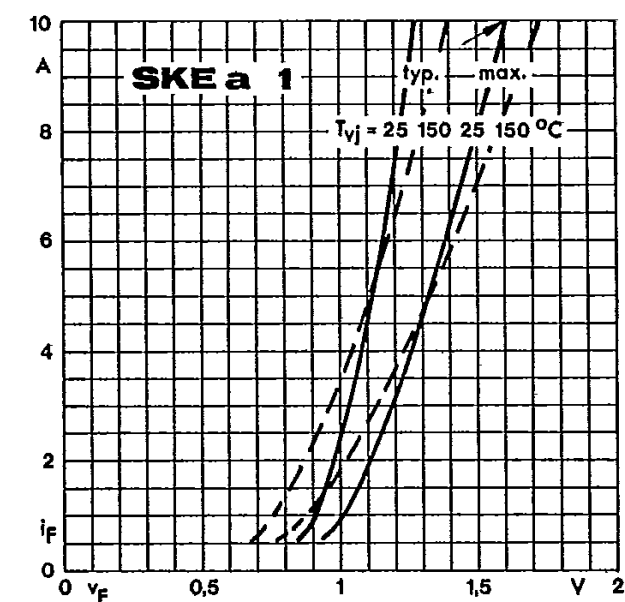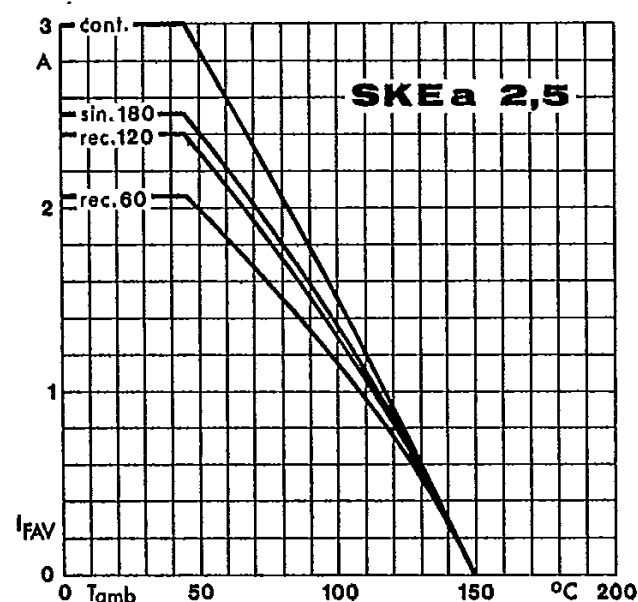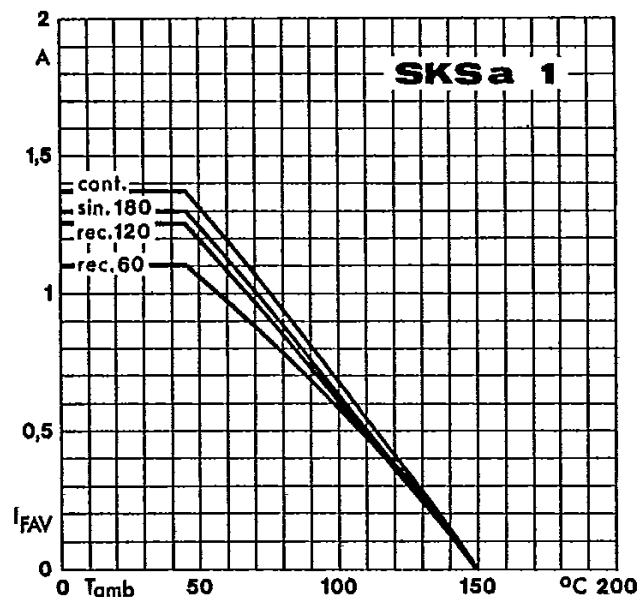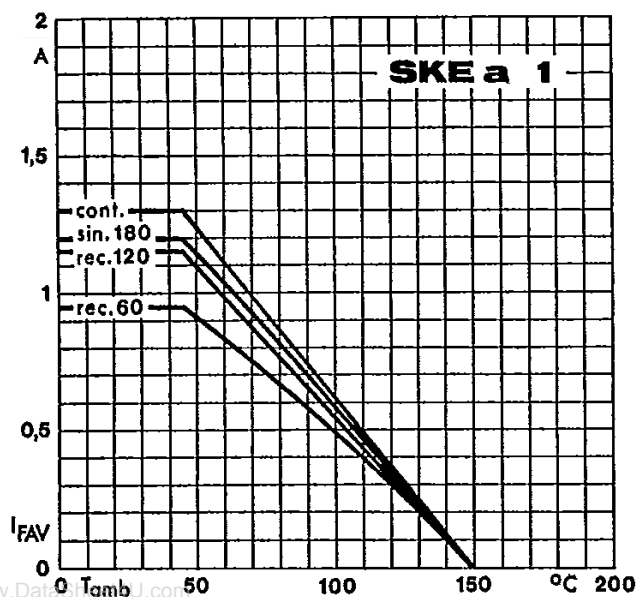

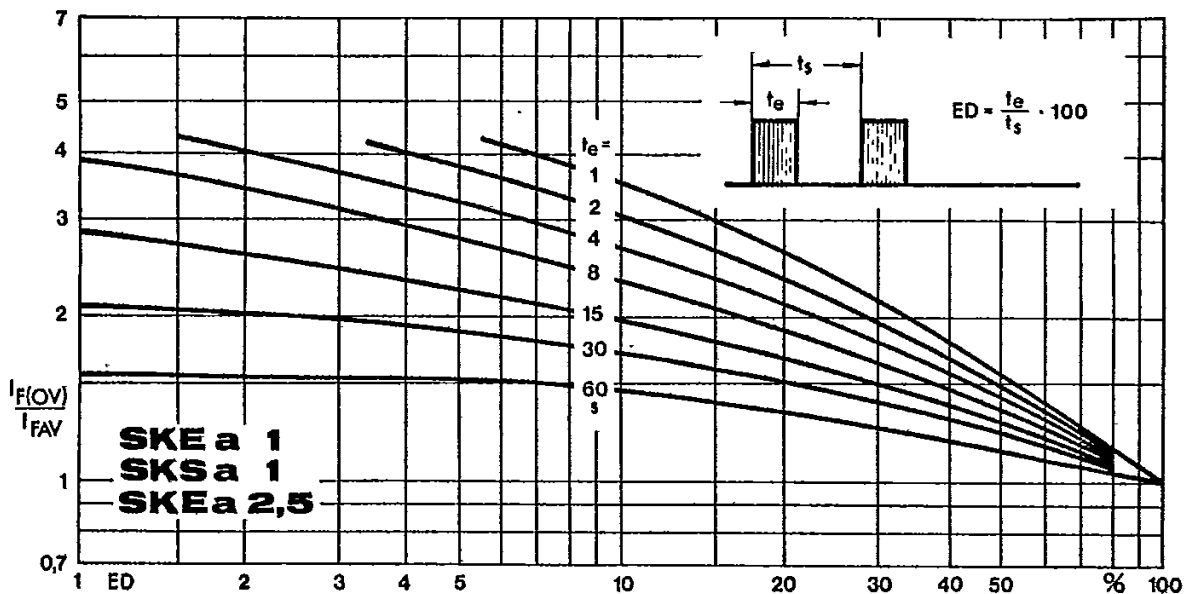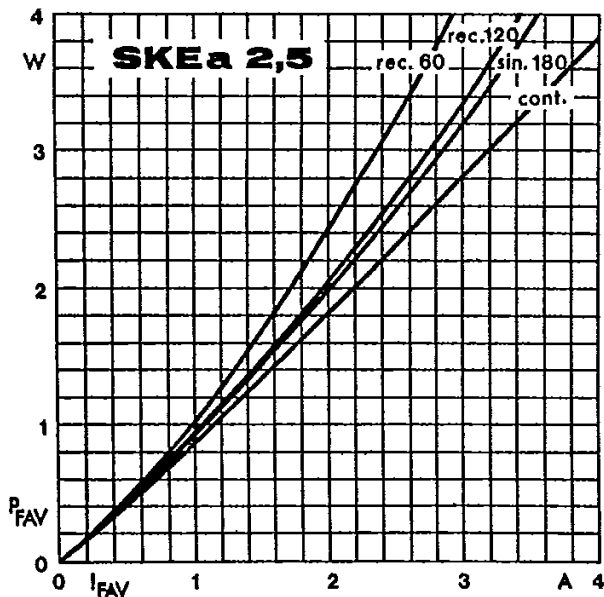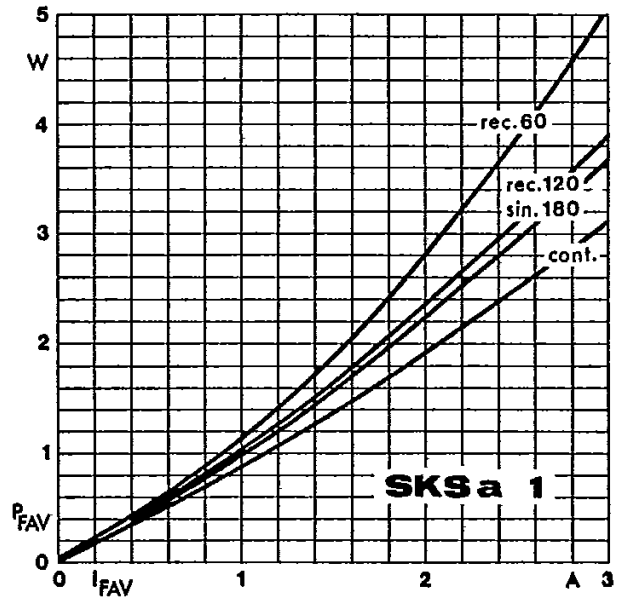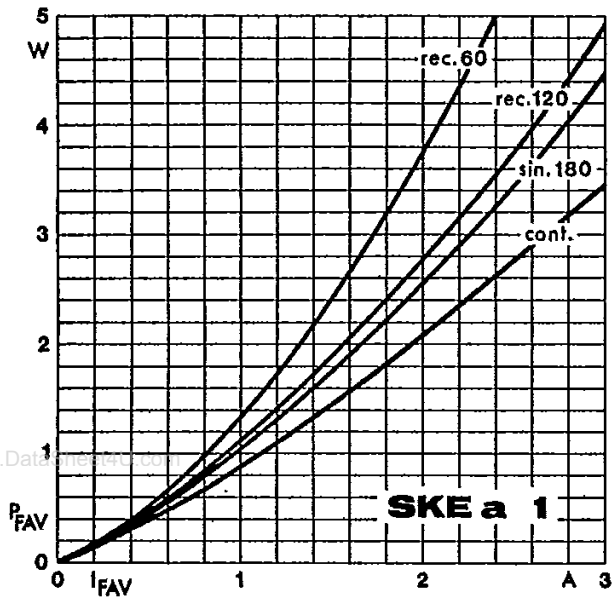

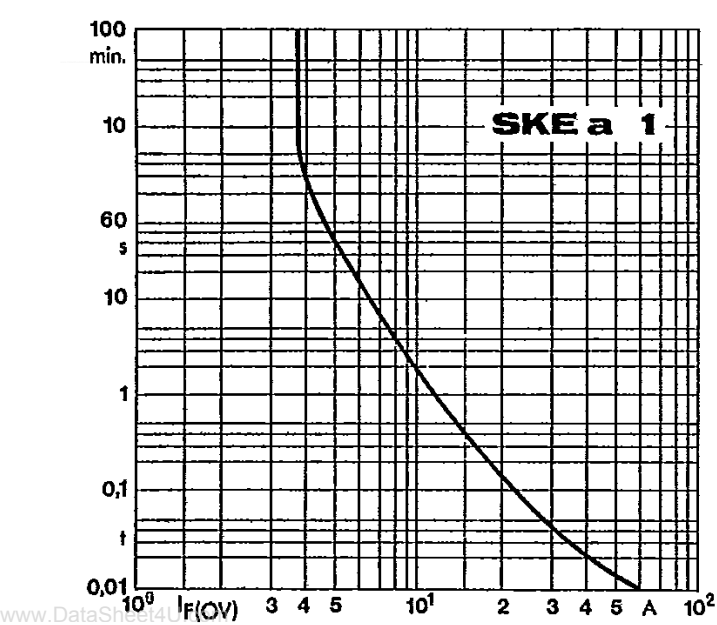


Fig. 10 a Rated overload current vs. time

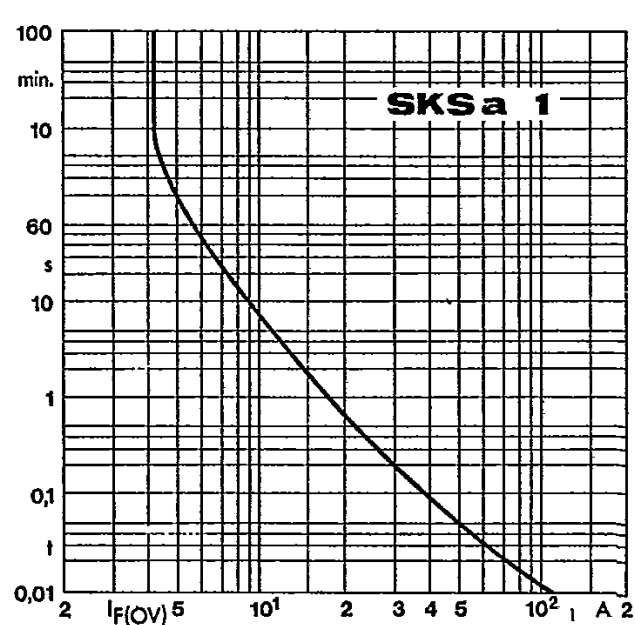


Fig. 10 b Rated overload current vs. time

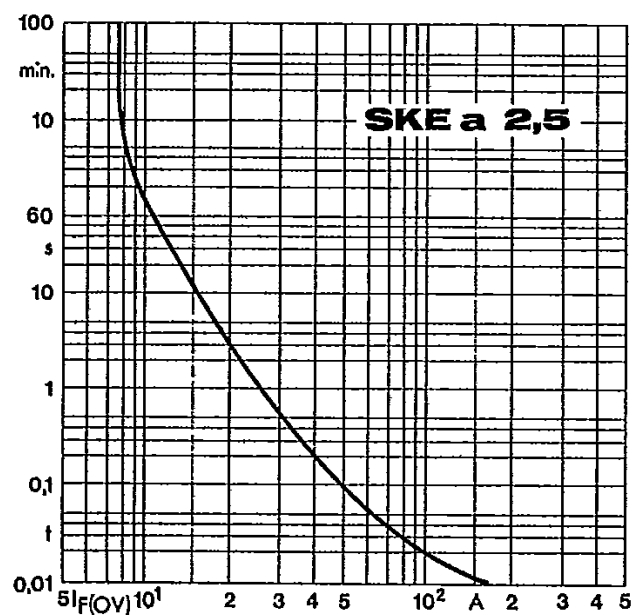


Fig. 10 c Rated overload current vs. time

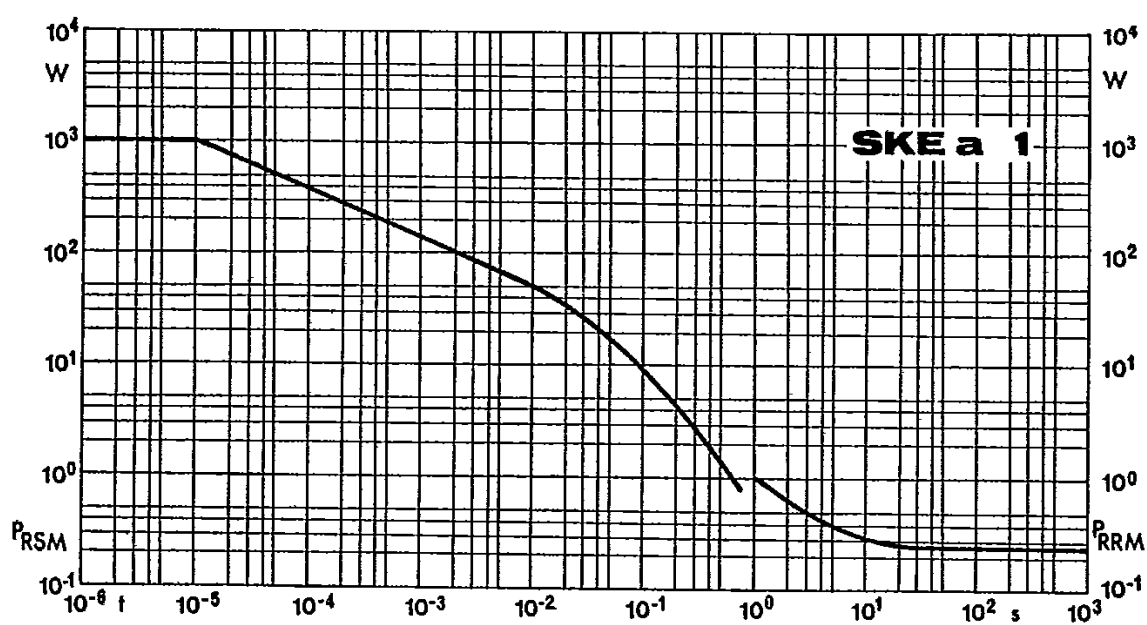


Fig. 11 a Rated reverse power dissipation vs. time

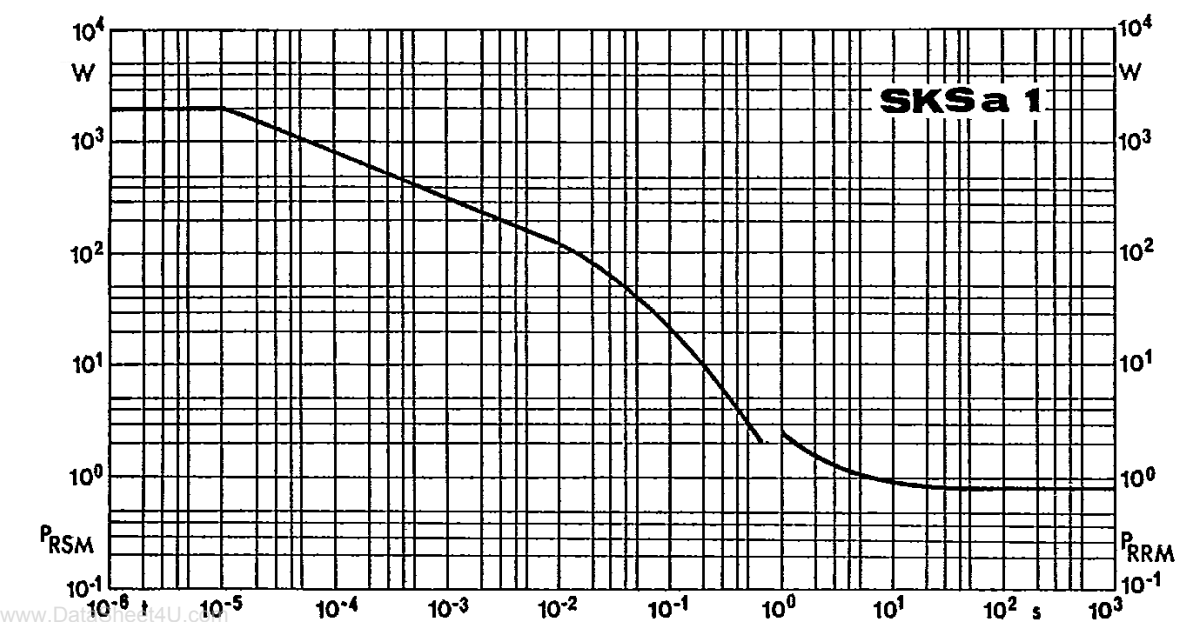


Fig. 11 b Rated reverse power dissipation vs. time


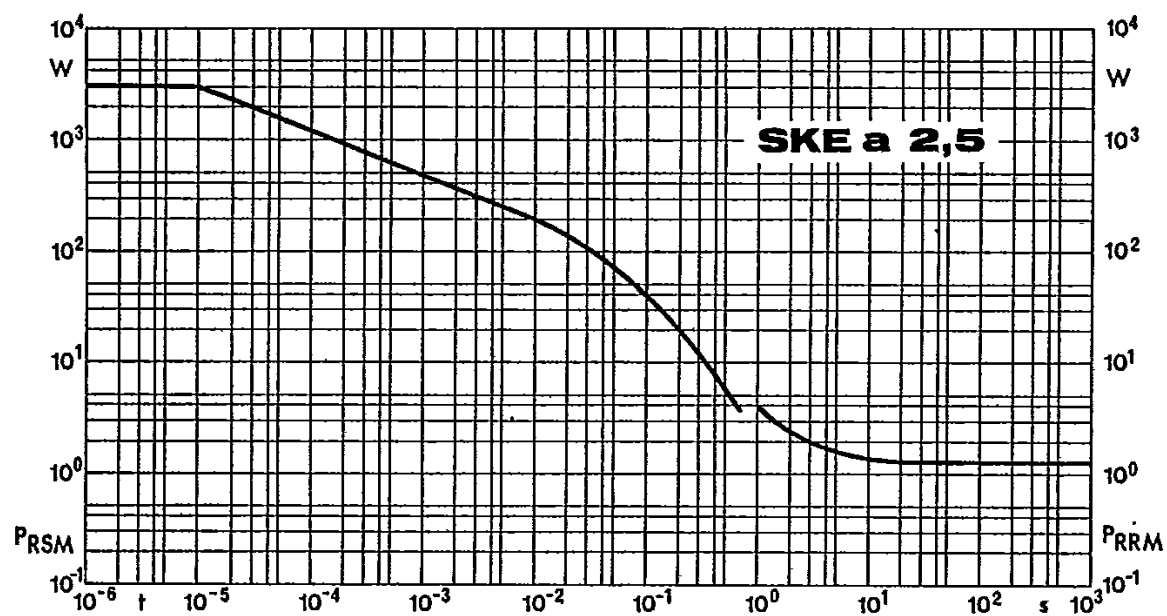


Fig. 11 c Rated reverse power dissipation vs. time

SKEa 1
SKSa 1
Case E 3
DIN 41898: 80 A 2



SKEa 2,5
Case E 4
DIN 41898: 80 B 2

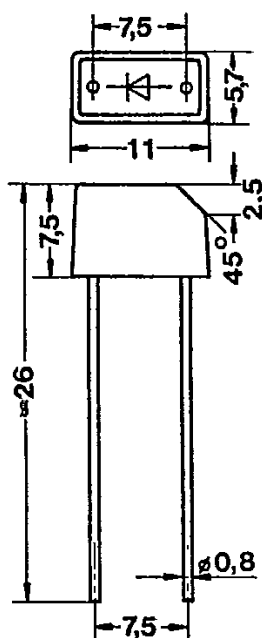