


# Power Relay 6PIN

## Model: SLA-24VDC-SL-C

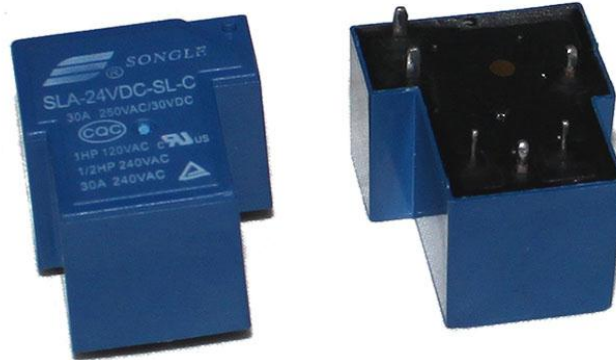


### Features:

1. Design conforms to foreign safety standard UL, CUL, TUV
2. Subminiature Type
3. Low Dissipation  
UL/CUL 1A/120VAC 24VDC  
TUV 3A/250VAC 30VDC  
3A/120VAC 24VDC
4. Size: Subminiature

|                       |                 |
|-----------------------|-----------------|
| pin                   | 6PIN            |
| Rated load            | 3A 250VAC 30VDC |
| Coil Voltage          | 5VDC            |
| Nominal Voltage       | 5VDC            |
| Nominal Current       | 66.7mA          |
| Coil Resistance       | 75 ohm(+/-10%)  |
| Power Consumption     | abt: 0.36W      |
| Pull-in Voltage       | 75%MaxVDC       |
| Drop-Out voltage      | 5%MinVDC        |
| Max-Allowable Voltage | 110%VDC         |

### Application:

Microprocessor Control, Store  
Program Exchanger and Household Appliance

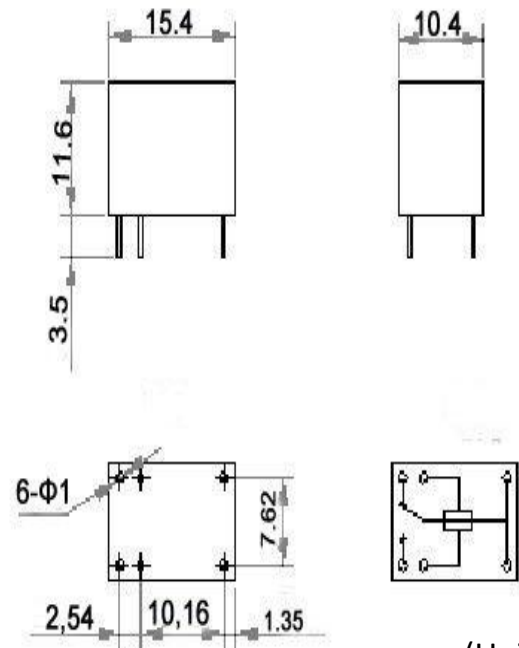

(Unit: mm)

*Made in China*