

SLF80R830GT



800V N-Channel Multi-EPI Super-JMOSFET

General Description

This Power MOSFET is produced using Msemitek's advanced Superjunction MOSFET technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency switched mode power supplies.

Features

- 850V@ $T_J=150^{\circ}\text{C}$
- 6A,800V, $R_{DS(on)}=700\text{m}\Omega@V_{GS}=10\text{V}$
- Low gate charge(typ. $Q_g=17.7\text{nC}$)
- High ruggedness
- Ultra fast switching
- 100% avalanche tested
- Improved dv/dt capability



Absolute Maximum Ratings

$T_C = 25^{\circ}\text{C}$ unless otherwise noted

| Symbol | Parameter | SLF80R830GT | Units |
|----------------|---|-------------|-----------------------|
| V_{DS} | Drain-Source Voltage | 800 | V |
| I_D | Drain Current * - Continuous ($T_C = 25^{\circ}\text{C}$) - Continuous ($T_C = 100^{\circ}\text{C}$) | 6 | A |
| | | 3.8 | A |
| I_{DM} | Drain Current * - Pulsed (Note 1) | 18 | A |
| V_{GS} | Gate-Source Voltage | ± 30 | V |
| E_{AS} | Single Pulsed Avalanche Energy (Note 2) | 56 | mJ |
| P_D | Power Dissipation ($T_C = 25^{\circ}\text{C}$) - Derate above 25°C | 42 | W |
| | | 0.33 | W/ $^{\circ}\text{C}$ |
| T_J, T_{STG} | Operating and Storage Temperature Range | -55 to +150 | $^{\circ}\text{C}$ |
| T_L | Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds | 260 | $^{\circ}\text{C}$ |

* Drain current limited by maximum junction temperature.

Thermal Characteristics

| Symbol | Parameter | SLF80R830GT | Units |
|-----------------|---|-------------|-----------------------------|
| $R_{\theta JC}$ | Thermal Resistance, Junction-to-Case | 3.0 | $^{\circ}\text{C}/\text{W}$ |
| $R_{\theta JA}$ | Thermal Resistance, Junction-to-Ambient | 62.5 | $^{\circ}\text{C}/\text{W}$ |

Package Marking

| Part Number | Top Marking | Package | Packing Method | MOQ | QTY |
|-------------|-------------|---------|----------------|------|------|
| SLF80R830GT | SLF80R830GT | TO-220F | Tube | 1000 | 5000 |

Electrical Characteristics

$T_C = 25^\circ\text{C}$ unless otherwise noted

| Symbol | Parameter | Test Conditions | Min | Typ | Max | Units |
|--------|-----------|-----------------|-----|-----|-----|-------|
|--------|-----------|-----------------|-----|-----|-----|-------|

Off Characteristics

| | | | | | | |
|------------|------------------------------------|---|------|----|-----|---------------|
| BV_{DSS} | Drain-Source Breakdown Voltage | $V_{GS} = 0\text{ V}, I_D = 250\ \mu\text{A}$ | 800 | -- | -- | V |
| I_{DSS} | Zero Gate Voltage Drain Current | $V_{DS} = 800\text{ V}, V_{GS} = 0\text{ V}$ | -- | -- | 1 | μA |
| I_{GSSF} | Gate-Body Leakage Current, Forward | $V_{GS} = 30\text{ V}, V_{DS} = 0\text{ V}$ | -- | -- | 100 | nA |
| I_{GSSR} | Gate-Body Leakage Current, Reverse | $V_{GS} = -30\text{ V}, V_{DS} = 0\text{ V}$ | -100 | -- | -- | nA |

On Characteristics

| | | | | | | |
|--------------|-----------------------------------|---|-----|-----|-----|------------|
| $V_{GS(th)}$ | Gate Threshold Voltage | $V_{DS} = V_{GS}, I_D = 250\ \mu\text{A}$ | 2.5 | -- | 4.5 | V |
| $R_{DS(on)}$ | Static Drain-Source On-Resistance | $V_{GS} = 10\text{ V}, I_D = 3\text{ A}$ | -- | 700 | 830 | m Ω |

Dynamic Characteristics

| | | | | | | |
|-----------|------------------------------|---|----|-----|----|----|
| C_{iss} | Input Capacitance | $V_{DS} = 100\text{ V}, V_{GS} = 0\text{ V},$ $f = 100\text{ KHz}$ | -- | 611 | -- | pF |
| C_{oss} | Output Capacitance | | -- | 186 | -- | pF |
| C_{rss} | Reverse Transfer Capacitance | | -- | 0.9 | -- | pF |

Switching Characteristics

| | | | | | | |
|--------------|---------------------|--|----|------|----|----------|
| $t_{d(on)}$ | Turn-On Delay Time | $V_{DS} = 400\text{ V}, I_D = 6\text{ A},$ $R_G = 4.7\ \Omega, V_{GS} = 10\text{ V}$ (Note3) | -- | 10 | -- | ns |
| t_r | Turn-On Rise Time | | -- | 33 | -- | ns |
| $t_{d(off)}$ | Turn-Off Delay Time | | -- | 30 | -- | ns |
| t_f | Turn-Off Fall Time | | -- | 28 | -- | ns |
| Q_g | Total Gate Charge | $V_{DS} = 400\text{ V}, I_D = 6\text{ A},$ $V_{GS} = 10\text{ V}$ (Note3) | -- | 17.7 | -- | nC |
| Q_{gs} | Gate-Source Charge | | -- | 2.8 | -- | nC |
| Q_{gd} | Gate-Drain Charge | | -- | 6.1 | -- | nC |
| R_G | Gate Resistance | $f = 1\text{ MHz}$ | -- | 6.3 | -- | Ω |

Drain-Source Diode Characteristics and Maximum Ratings

| | | | | | | |
|----------|---|--|----|-----|-----|---------------|
| I_S | Maximum Continuous Drain-Source Diode Forward Current | -- | -- | 6 | A | |
| I_{SM} | Maximum Pulsed Drain-Source Diode Forward Current | -- | -- | 18 | A | |
| V_{SD} | Drain-Source Diode Forward Voltage | $V_{GS} = 0\text{ V}, I_S = 6\text{ A}$ | -- | -- | 1.4 | V |
| t_{rr} | Reverse Recovery Time | $V_{DS} = 400\text{ V}, I_S = 6\text{ A},$ | -- | 248 | -- | ns |
| Q_{rr} | Reverse Recovery Charge | $di_F / dt = 100\text{ A}/\mu\text{s}$ | -- | 2.4 | -- | μC |

Notes:

1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature
2. EAS condition: $T_J = 25^\circ\text{C}, V_{DD} = 50\text{ V}, V_G = 10\text{ V}, L = 10\text{ mH},$
3. Pulse Test: Pulse Width $\leq 300\ \mu\text{s},$ Duty Cycle $\leq 0.5\%$

Typical Characteristics

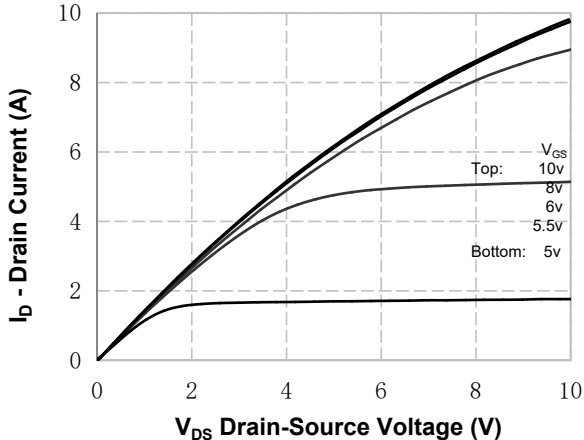


Figure 1. On-Region Characteristics

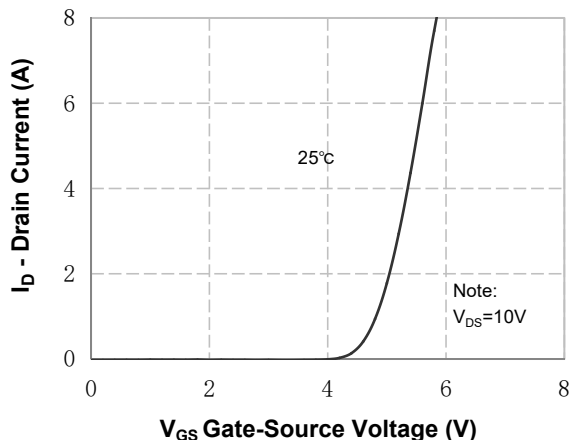


Figure 2. Transfer Characteristics

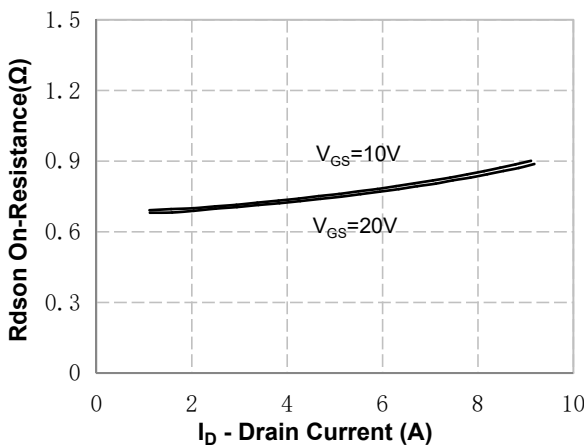


Figure 3. On-Resistance Variation vs Drain Current and Gate Voltage

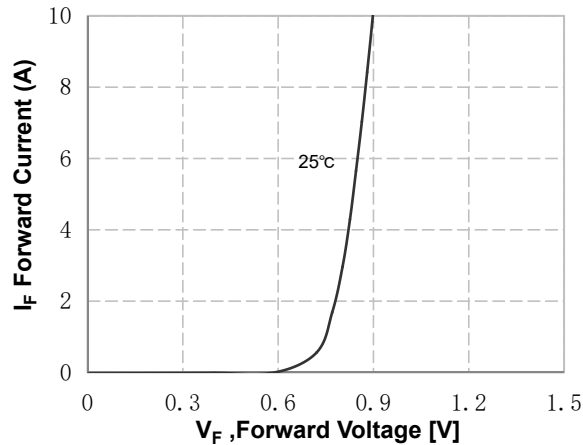


Figure 4. Body Diode Forward Voltage Variation with Source Current

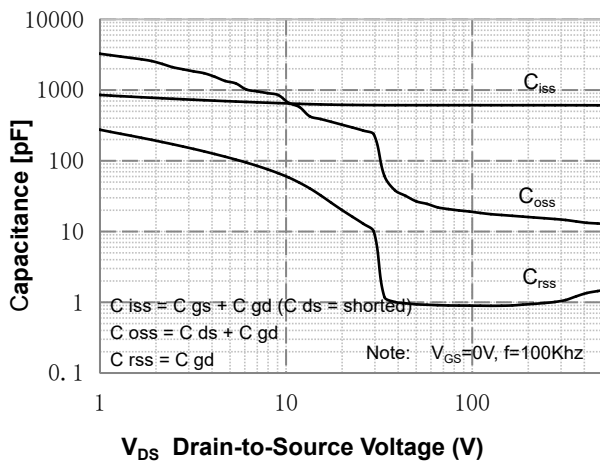


Figure 5. Capacitance Characteristics

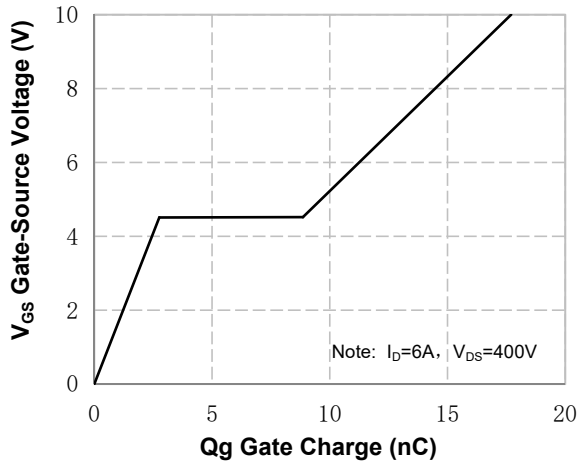


Figure 6. Gate Charge Characteristics

Typical Characteristics (Continued)

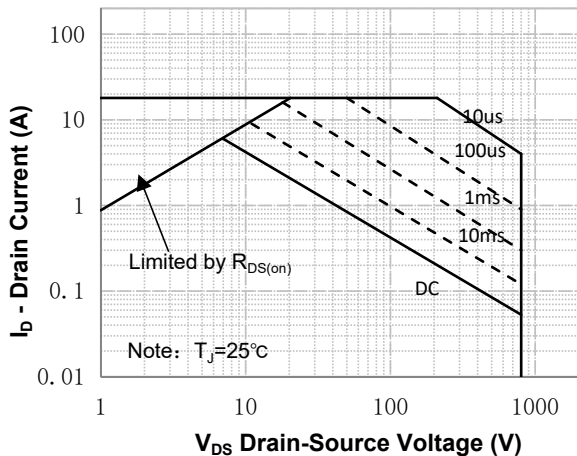


Figure 7. Maximum Safe Operating Area

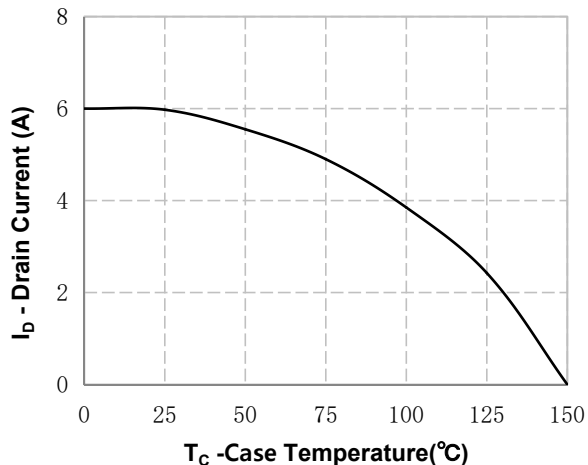


Figure 8. Maximum Drain Current vs Case Temperature





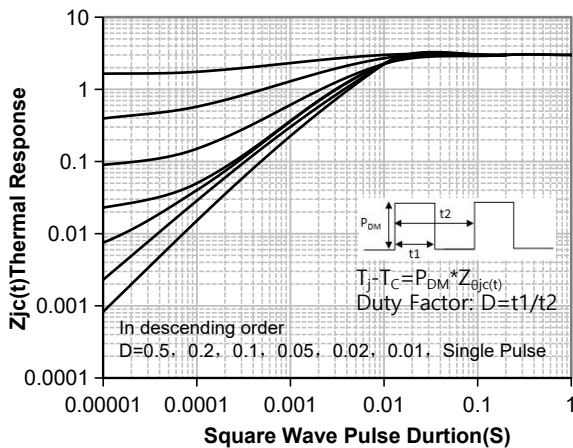


Figure 9. Transient Thermal Response Curve



Gate Charge Test Circuit & Waveform

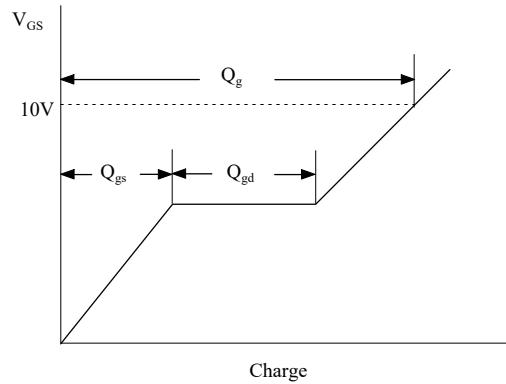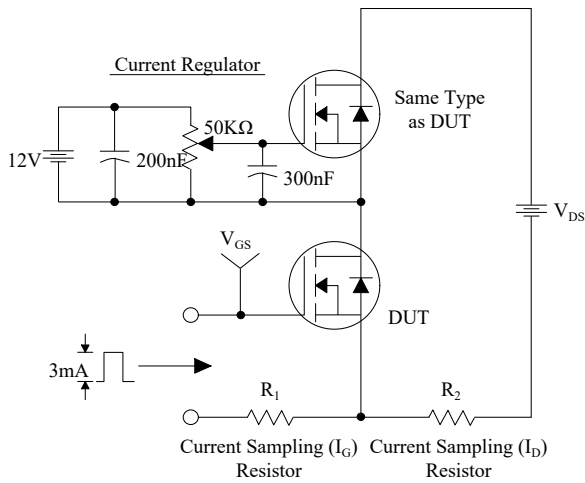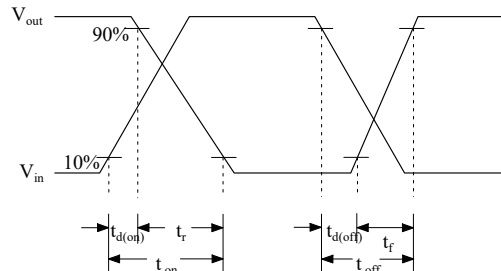


Resistive Switching Test Circuit & Waveforms

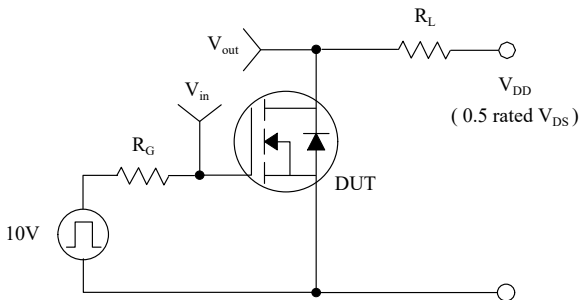


Unclamped Inductive Switching Test Circuit & Waveforms

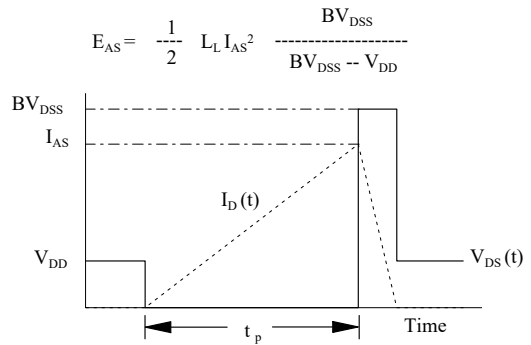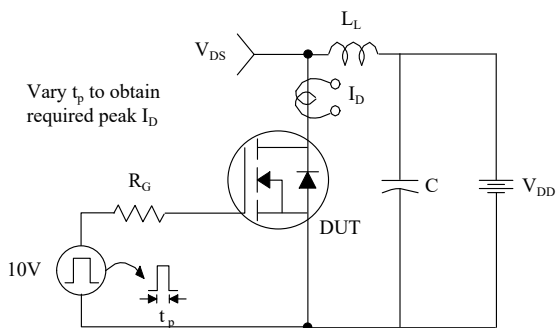

Peak Diode Recovery dv/dt Test Circuit & Waveforms

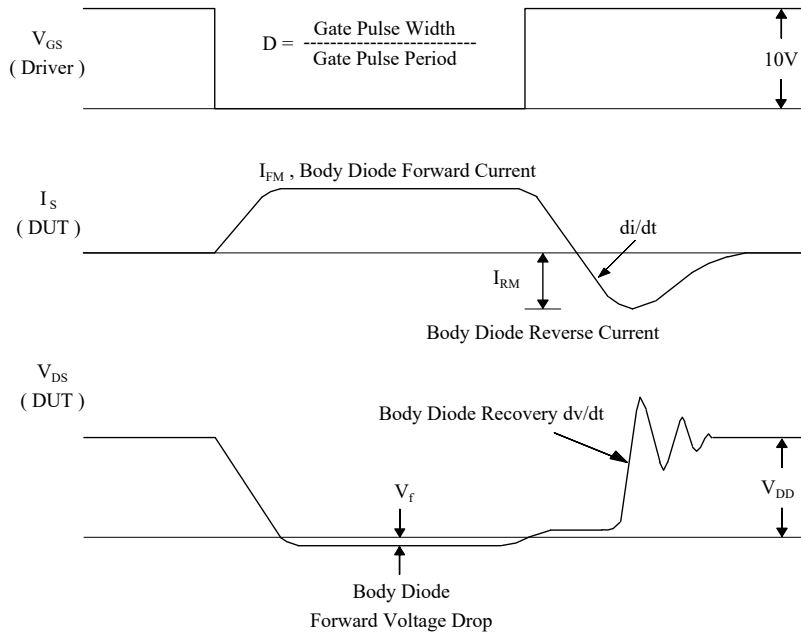

TO-220F OUTLINE

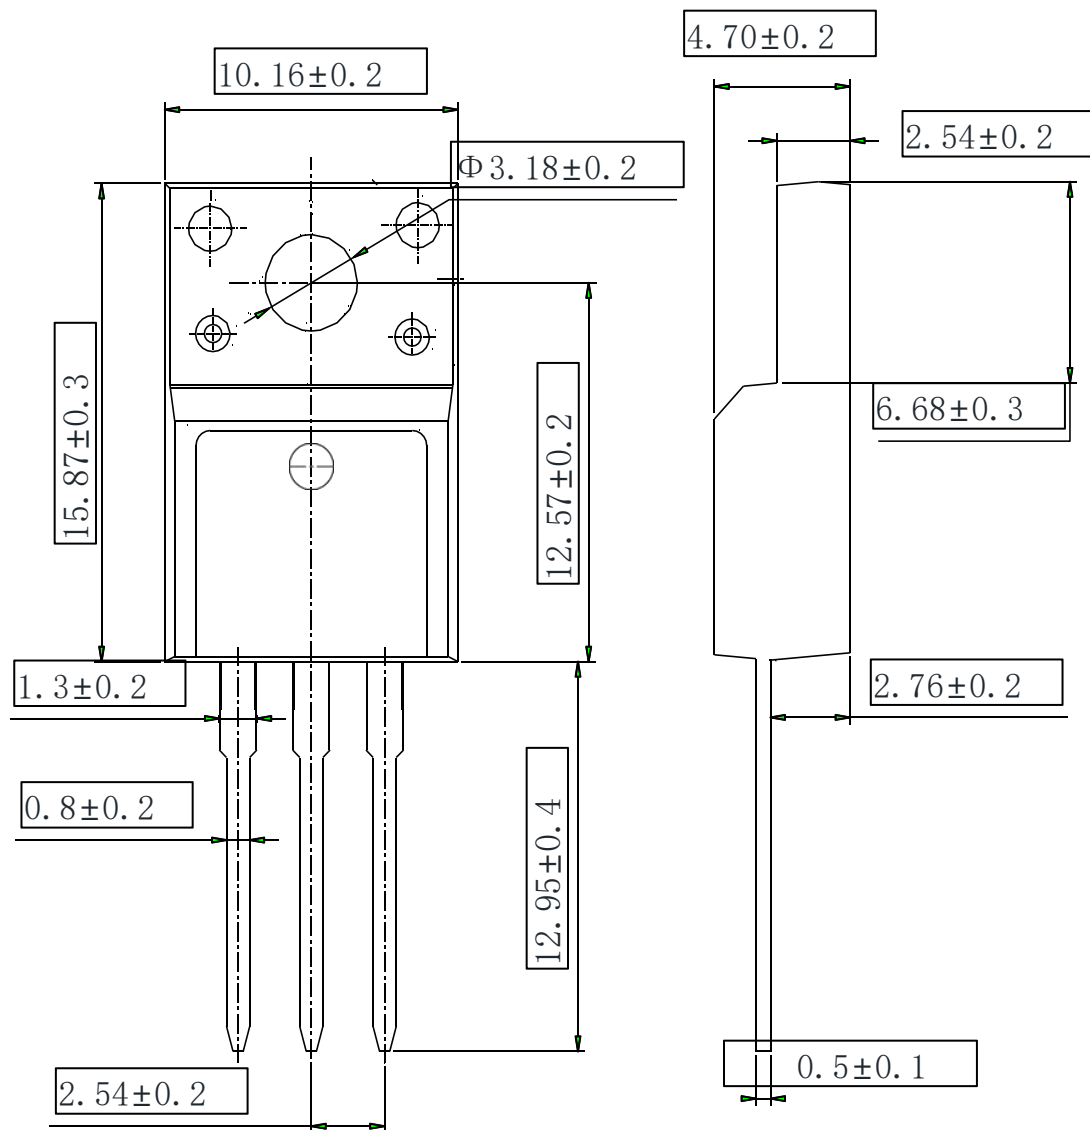

NOTE:

- 1The plastic package is not marked as smooth surface $Ra=0.1$; Subglossy surface $Ra=0.8$
- 2.Undeclared tolerance ± 0.15 , Unmarked fillet $R_{max}=0.25$

Disclaimer

The content specified herein is for the purpose of introducing Msemitek's products (here in after "Products"). The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Msemitek does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of the Products or technical information described in this document.

The products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). Msemitek shall bear no responsibility in any way for use of any of the Products for the above special purposes.

Although, Msemitek endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Msemitek's product.

The content specified herein is subject to change for improvement without notice. When using a Msemitek's product, be sure to obtain the latest specifications.

单击下面可查看定价，库存，交付和生命周期等信息

[>>Maplesemi\(美浦森半导体\)](#)