




General Description

Silego SLG7NT4129 is a low power and small form device. The SoC is housed in a 2.5mm x 2.5mm TDFN package which is optimal for using with small devices.

Features

- Low Power Consumption
- Dynamic Supply Voltage
- RoHS Compliant / Halogen-Free
- Pb-Free TDFN-12 Package


Pin Configuration

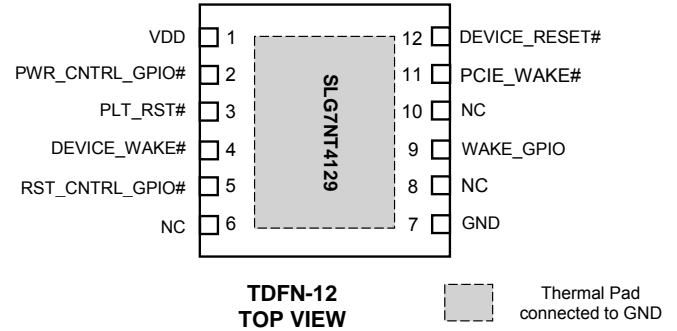

Output Summary

- 2 Outputs – Open Drain
- 2 Outputs – 3-State

Block Diagram

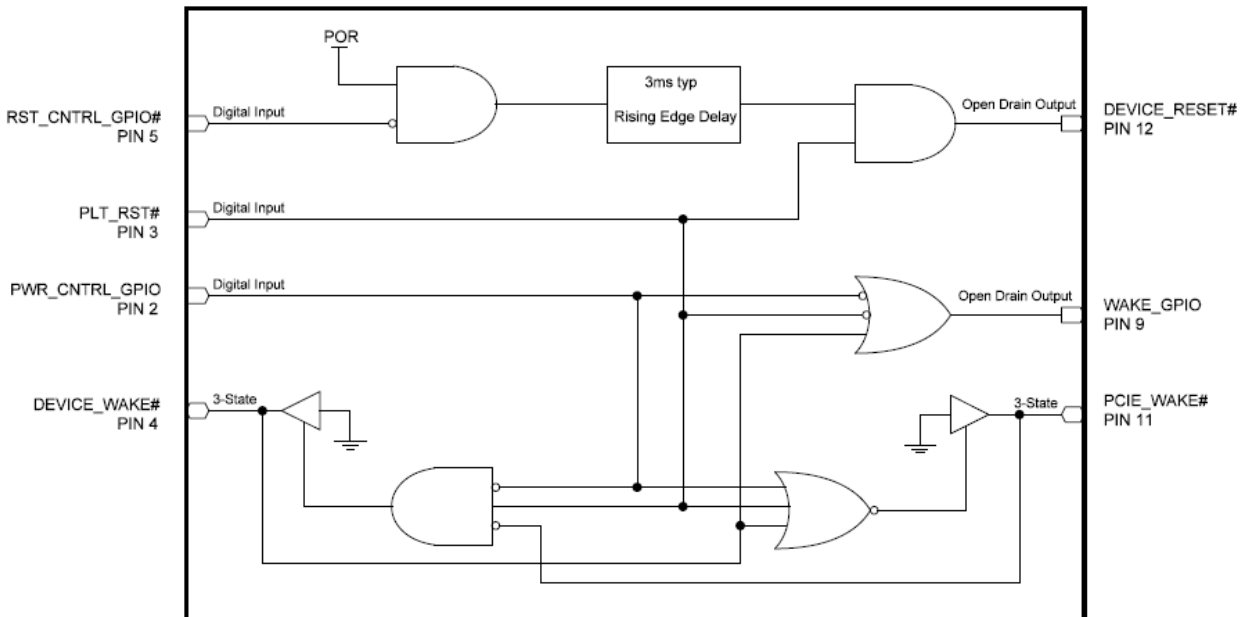



Pin Configuration

Pin #	Pin Name	Type	Pin Description
1	VDD	PWR	Supply Voltage
2	PWR_CNTRL_GPIO#	Input	Digital Input
3	PLT_RST#	Input	Digital Input
4	DEVICE_WAKE#	Input/Output	3-State
5	RST_CNTRL_GPIO#	Input	Digital Input
6	NC	--	Keep floating or connect to GND
7	GND	GND	Ground
8	NC	--	Keep floating or connect to GND
9	WAKE_GPIO	Output	Open Drain
10	NC	--	Keep floating or connect to GND
11	PCIE_WAKE#	Input/Output	3-State
12	DEVICE_RESET#	Output	Open Drain
Exposed Bottom Pad	Exposed Bottom Pad	GND	Ground

Ordering Information

Part Number	Package Type
SLG7NT4129V	V = TDFN-12
SLG7NT4129VTR	VTR = TDFN-12 - Tape and Reel (3k units)



Absolute Maximum Conditions

Parameter	Min.	Max.	Unit
V_{HIGH} to GND	-0.3	7	V
Voltage at input pins	-0.3	7	V
Current at input pin	-1.0	1.0	mA
Storage temperature range	-65	150	°C
Junction temperature	--	150	°C


Electrical Characteristics

(@ 25°C, unless otherwise stated)

Symbol	Parameter	Condition/Note	Min.	Typ.	Max.	Unit
V_{DD}	Supply Voltage		1.71	--	3.6	V
I_Q	Quiescent Current	Static inputs and outputs	--	1	--	μA
T_A	Operating Temperature		-40	25	85	°C
I_L	Input Leakage Current	Leakage Current for Digital Inputs or outputs in High impedance state	-100	--	100	nA
V_{IH}	HIGH-Level Input Voltage	Logic Input, at VDD=1.8V	1.1	--	--	V
		Logic Input, at VDD=3.3V	1.8			
V_{IL}	LOW-Level Input Voltage	Logic Input, at VDD=1.8V	--	--	0.65	V
		Logic Input, at VDD=3.3V			1.1	
I_{IH}	HIGH-Level Input Current	Logic Input Pins; $V_{IN}=V_{DD}$	-1		1	μA
I_{IL}	LOW-Level Input Current	Logic Input Pins; $V_{IN}=0V$	-1		1	μA
T_{DLY0}	Delay0 Time		2.1	3	3.9	ms
V_{OH}	Output Voltage High	3-State, OE=1, $I_{OH} = 100\mu A$ at VDD=1.8V	1.66	--	--	V
		3-State, OE=1, $I_{OH} = 3mA$ at VDD=3.3V	2.1	--	--	
V_{OL}	Output Voltage Low	3-State, OE=1, $I_{OL} = 100\mu A$ at VDD=1.8V	--	--	0.04	V
		3-State, OE=1, $I_{OL} = 3mA$ at VDD=3.3V	--	--	0.81	
		Open Drain, $I_{OL} = 5mA$, at VDD=1.8V	--	--	0.340	
		Open Drain, $I_{OL} = 20mA$ at VDD=3.3V	--	--	0.605	
V_O	Maximal Voltage Applied to any PIN in High-Impedance State		--	--	VDD	V
I_{OL}	LOW-Level Output Current	3-State, OE=1, $V_{OL} = 0.15V$, at VDD=1.8V	0.34	--	--	mA
		3-State, OE=1, $V_{OL} = 0.4V$, at VDD=3.3V	1.836	--	--	
		Open Drain, $V_{OL} = 0.15V$, at VDD=1.8V	2.7	--	--	
		Open Drain, $V_{OL} = 0.4V$, at VDD=3.3V	14.6	--	--	
T_{SU}	Start up Time	After VDD reaches 1.6V level	--	7	--	ms




Timing diagram

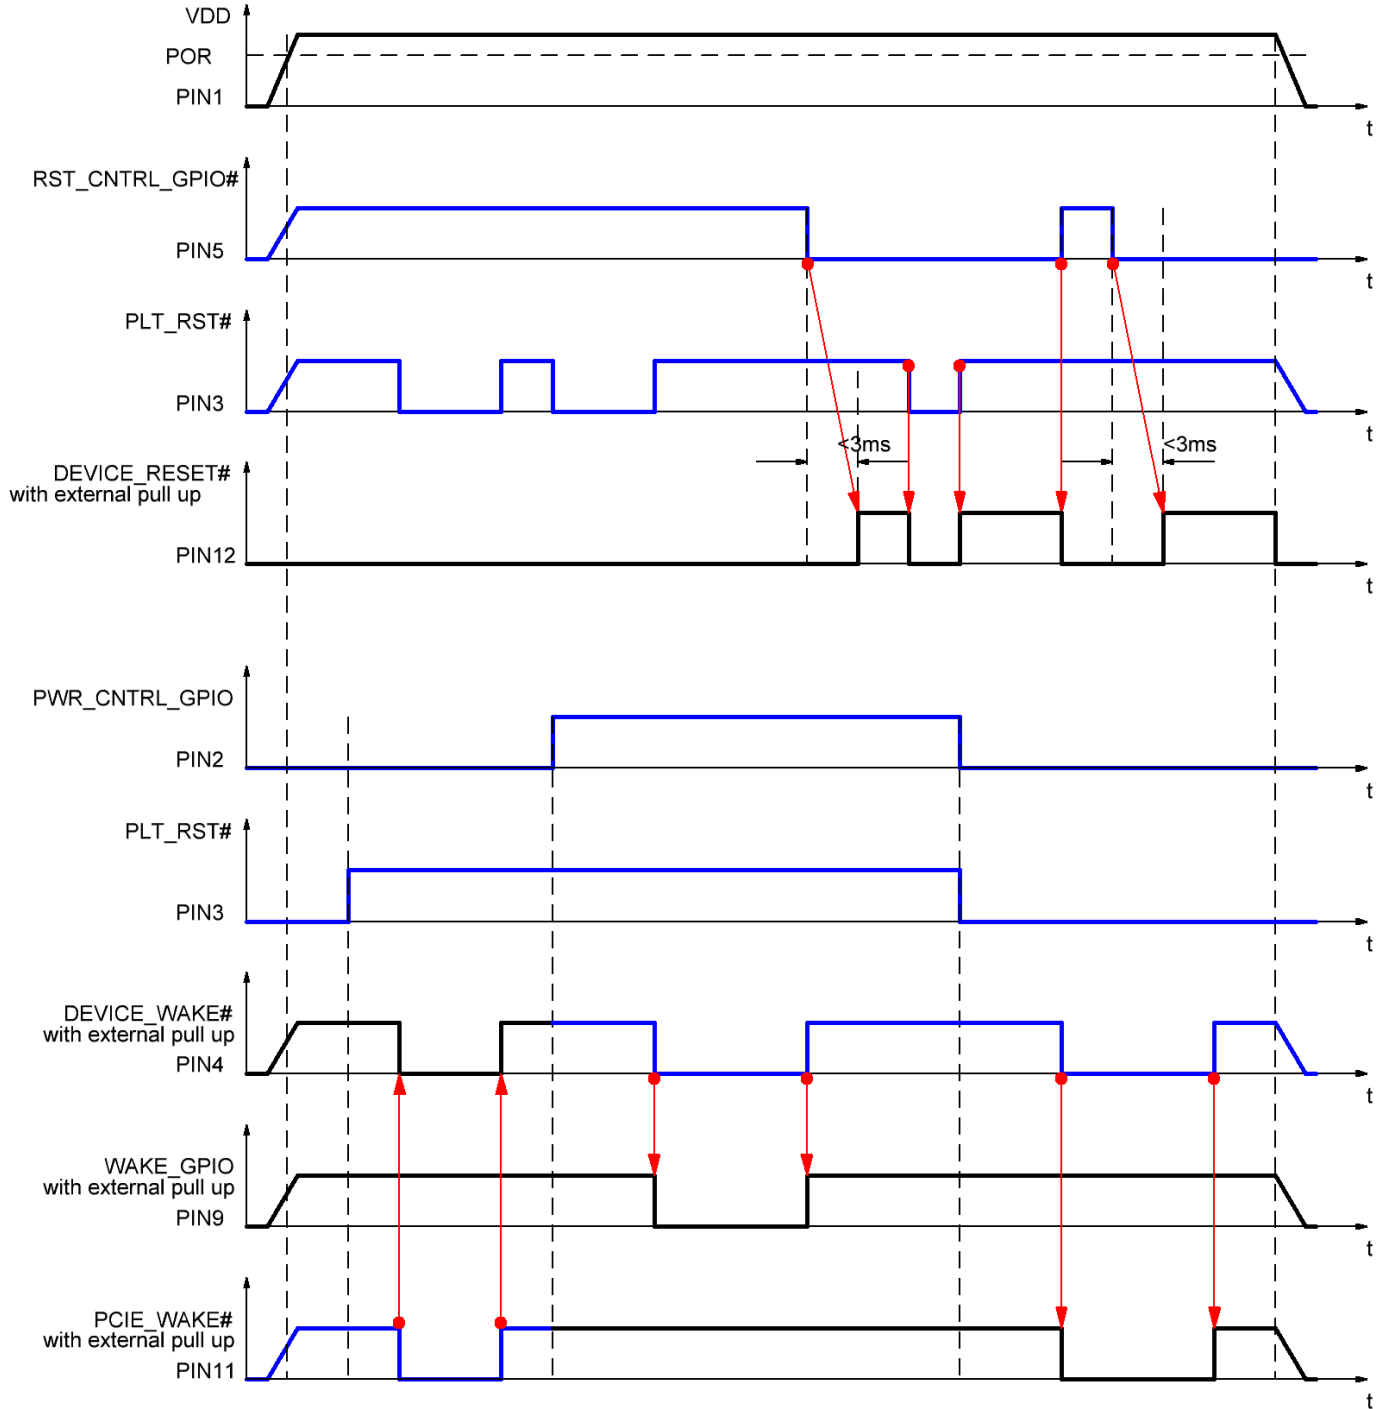



Package Top Marking

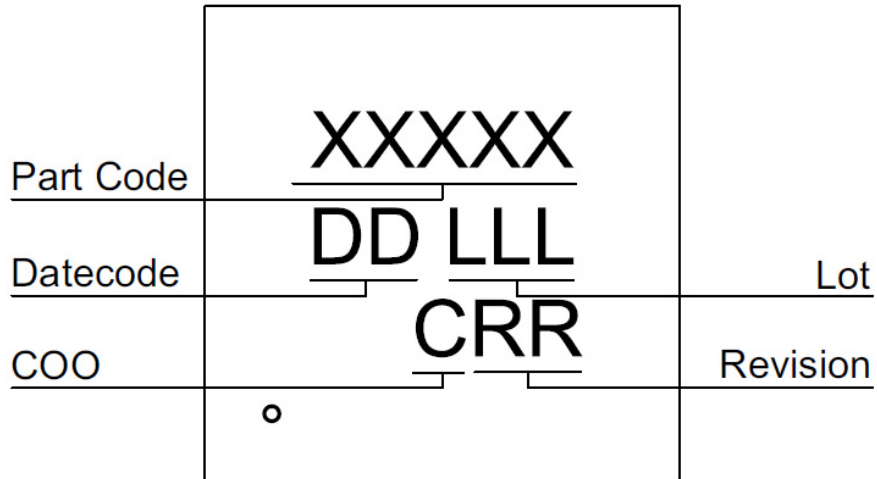


- XXXXXX – Part ID Field: identifies the specific device configuration
- DD – Date Code Field: Coded date of manufacture
- LLL – Lot Code: Designates Lot #
- C – COO: Specifies Country of Origin
- RR – Revision Code: Device Revision

Datasheet Revision	Programming Code Number	Part Code	Revision	Date
1.0	04	4129V	AA	01/23/2013



Package Drawing and Dimensions

12 Lead TDFN Package JEDEC MO-252, Variation 2525E

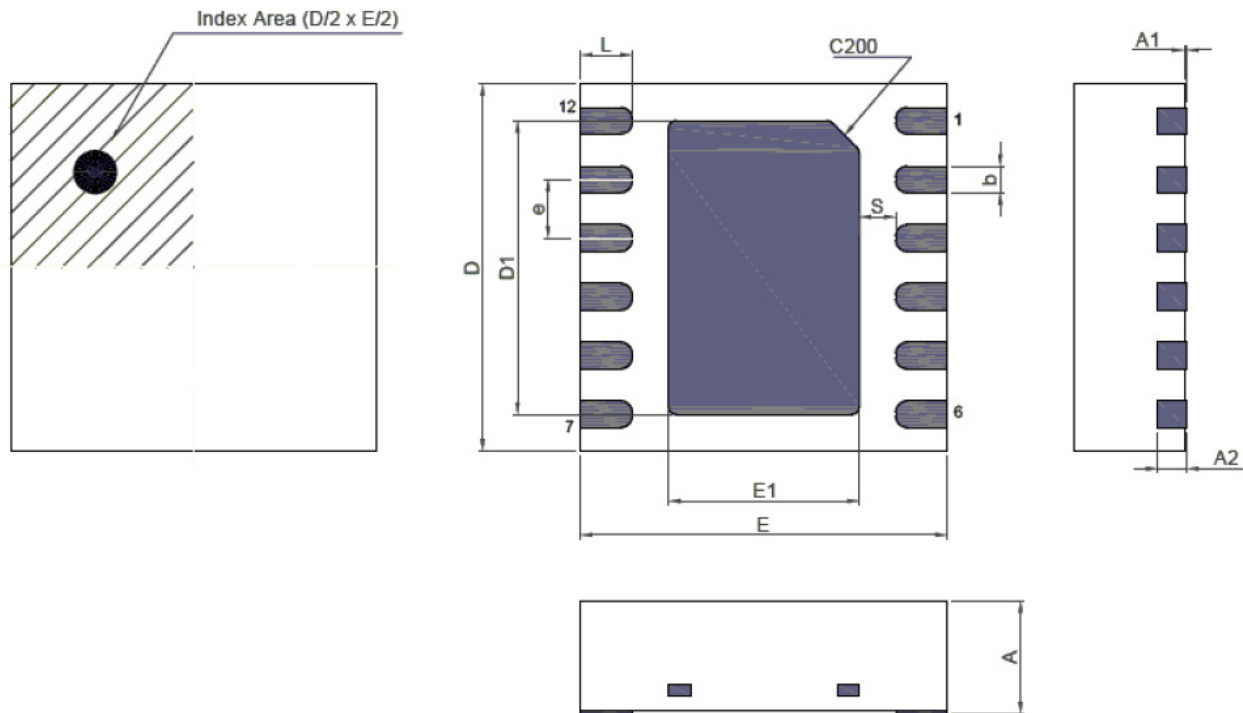

Unit: mm

Symbol	Min	Nom.	Max	Symbol	Min	Nom.	Max
A	0.70	0.75	0.80	D1	1.95	2.00	2.05
A1	0.005	-	0.060	E1	1.25	1.30	1.35
A2	0.15	0.20	0.25	e	0.40 BSC		
b	0.13	0.18	0.23	L	0.30	0.35	0.40
D	2.45	2.50	2.55	S	0.18	-	-
E	2.45	2.50	2.55				




Tape and Reel Specification

Package Type	# of Pins	Nominal Package Size (mm)	Max Units		Reel & Hub Size (mm)	Trailer A		Leader B		Pocket (mm)	
			per reel	per box		Pockets	Length (mm)	Pockets	Length (mm)	Width	Pitch
TDFN 12L 2.5x2.5mm 0.4P Green	12	2.5x2.5x0.75	3000	3000	178/60	42	168	42	168	8	4

Carrier Tape Drawing and Dimensions

Package Type	Pocket BTM Length (mm)	Pocket BTM Width (mm)	Pocket Depth (mm)	Index Hole Pitch (mm)	Pocket Pitch (mm)	Index Hole Diameter (mm)	Index Hole to Tape Edge (mm)	Index Hole to Pocket Center (mm)	Tape Width (mm)
	A0	B0	K0	P0	P1	D0	E	F	W
TDFN 12L 2.5x2.5mm 0.4P Green	2.75	2.75	1.05	4	4	1.55	1.75	3.5	8

Refer to EIA-481 Specifications

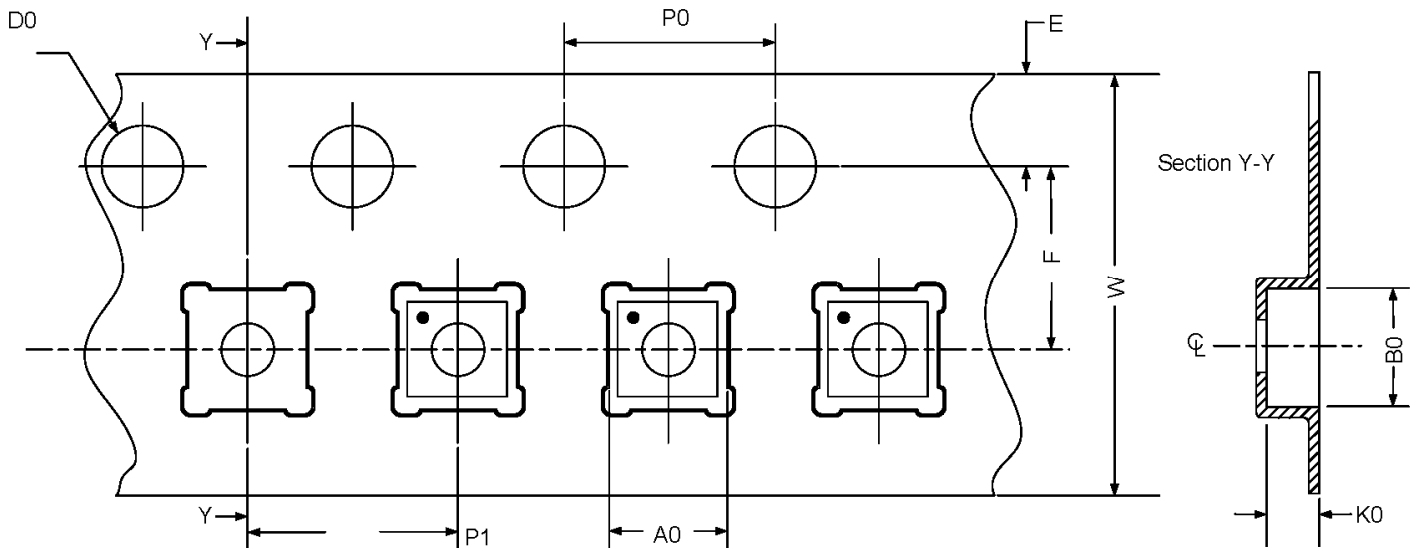

Recommended Reflow Soldering Profile

Please see IPC/JEDEC J-STD-020: latest revision for reflow profile based on package volume of 4.6875 mm³ (nominal). More information can be found at www.jedec.org.



Datasheet Revision History

Date	Version	Change
11/08/2012	0.1	New design
11/22/2012	0.11	Changed PIN12 type to Open Drain
11/26/2012	0.20	Changed DEVICE_WAKE# and PCIE_WAKE# functionality to bi-directional
01/18/2013	0.21	Some typos in PIN out table are fixed
01/23/2013	1.0	Production Release
06/11/2013	1.01	Housekeeping (fixed block diagram)



Silego Website & Support

Silego Technology Website

Silego Technology provides online support via our website at <http://www.silego.com/>. This website is used as a means to make files and information easily available to customers.

For more information regarding Silego Green products, please visit:

<http://greenpak.silego.com/>
<http://greenpak2.silego.com/>
<http://greenfet.silego.com/>
<http://greenfet2.silego.com/>
<http://greenclock.silego.com/>

Products are also available for purchase directly from Silego at the Silego Online Store at <http://store.silego.com/>.

Silego Technical Support

Datasheets and errata, application notes and example designs, user guides, and hardware support documents and the latest software releases are available at the Silego website or can be requested directly at info@silego.com.

For specific GreenPAK design or applications questions and support please send email requests to GreenPAK@silego.com

Users of Silego products can receive assistance through several channels:

Online Live Support

Silego Technology has live video technical assistance and sales support available at <http://www.silego.com/>. Please ask our live web receptionist to schedule a 1 on 1 training session with one of our application engineers.

Contact Your Local Sales Representative

Customers can contact their local sales representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. More information regarding your local representative is available at the Silego website or send a request to info@silego.com

Contact Silego Directly

Silego can be contacted directly via e-mail at info@silego.com or user submission form, located at the following URL: <http://support.silego.com/>

Other Information

The latest Silego Technology press releases, listing of seminars and events, listings of world wide Silego Technology offices and representatives are all available at <http://www.silego.com/>

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. SILEGO TECHNOLOGY DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. SILEGO TECHNOLOGY RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.