

General Description


This Power MOSFET is produced using Maple semi's Advanced Super-Junction technology.

This advanced technology has been especially tailored to minimize conduction loss, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode.

These devices are well suited for AC/DC power conversion

Features

- 10A, 800V, RDS(on) typ.= 0.55Ω@VGS = 10 V
- Low gate charge (typical 35nC)
- High ruggedness
- Fast switching
- 100% avalanche tested
- Improved dv/dt capability

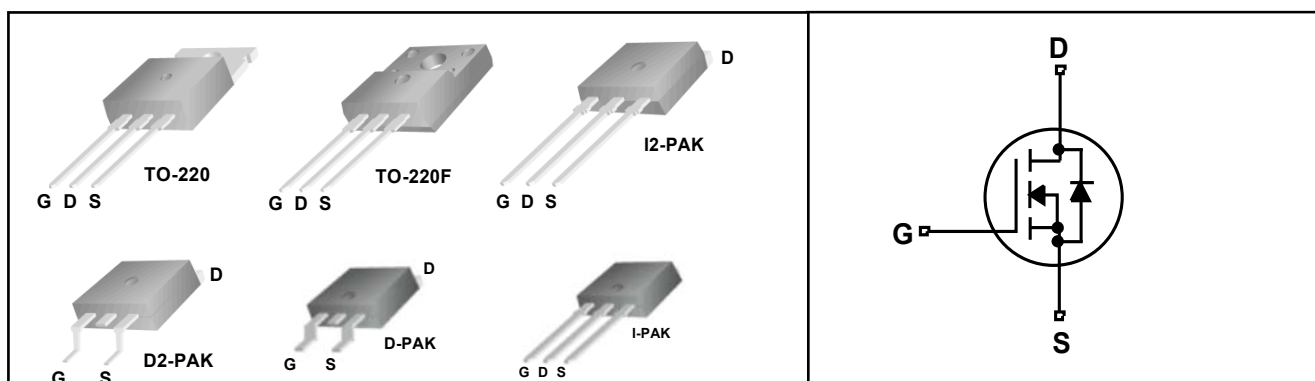

Absolute Maximum Ratings

TC = 25°C unless otherwise noted

Symbol	Parameter	D2-PAK/D-PAK I2-PAK / I-PAK/ TO-220	TO-220F	Units
VDSS	Drain-Source Voltage	800		V
ID	Drain Current - Continuous (TC = 25°C)	10	10*	A
	- Continuous (TC = 100°C)	6	6*	A
IDM	Drain Current - Pulsed (Note 1)	26	26*	A
VGSS	Gate-Source Voltage	±30		V
EAS	Single Pulsed Avalanche Energy (Note 2)	120		mJ
IAR	Avalanche Current (Note 1)	2		A
EAR	Repetitive Avalanche Energy (Note 1)	0.32		mJ
dv/dt	Peak Diode Recovery dv/dt (Note 3)	15		V/ns
PD	Power Dissipation (TC = 25°C)	83	31	W
	- Derate above 25°C	0.67	0.25	W/°C
TJ, TSTG	Operating and Storage Temperature Range	-55 to +150		°C
TL	Maximum lead temperature for soldering purposes,	300		°C
	1/8" from case for 5 seconds			

*Drain current limited by maximum junction temperature.

Thermal Characteristics

Symbol	Parameter	Value						Units
		DPAK	IPAK	TO220	D2PAK	I2PAK	TO220F	
RθJC	Thermal Resistance, Junction-to-Case	1.5	1.5	1.5	1.5	1.5	4.0	°C/W
RθJS	Thermal Resistance, Case-to-Sink Typ.	-	-	0.5	0.5	0.5	-	°C/W
RθJA	Thermal Resistance, Junction-to-Ambient	62	62	62	62	62	80	°C/W

Electrical Characteristics (TC = 25 °C unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Off Characteristics						
BVDSS	Drain-Source Breakdown Voltage	VGS = 0V, ID = 250uA, TJ=25℃	800	-	-	V
		VGS = 0V, ID = 250uA, TJ=150℃	-	850	-	V
ΔBVDSS ΔTJ	Breakdown Voltage Temperature coefficient	ID = 250uA, referenced to 25℃	-	0.6	-	V/℃
IDSS	Drain-Source Leakage Current	VDS =800V, VGS = 0V	-	-	1	uA
		VDS =640V, TC = 125 ℃	-	10	-	uA
IGSS	Gate-Source Leakage, Forward	VGS = 30V, VDS = 0V	-	-	100	nA
	Gate-source Leakage, Reverse	VGS = -30V, VDS = 0V	-	-	-100	nA
On Characteristics						
VGS(th)	Gate Threshold Voltage	VDS = VGS, ID = 250uA	2.5	3.5	4.5	V
RDS(ON)	Static Drain-Source On-state Resistance	VGS =10 V, ID = 5A	-	0.55	0.6	Ω
Dynamic Characteristics						
Ciss	Input Capacitance	VGS =0 V, VDS =25V, f = 1MHz	-	550	-	pF
Coss	Output Capacitance		-	140	-	
Crss	Reverse Transfer Capacitance		-	7	-	
Dynamic Characteristics						
td(on)	Turn-on Delay Time	VDD =400V, ID =5.0A, RG =20Ω	-	15	-	nS
tr	Rise Time		-	10	-	
td(off)	Turn-off Delay Time		-	110	-	
tf	Fall Time		-	9	-	
Qg	Total Gate Charge	VDS =480V, VGS =10V, ID =5.0A	-	35	-	nC
Qgs	Gate-Source Charge		-	3.8	-	
Qgd	Gate-Drain Charge(Miller Charge)		-	4	-	

Source-Drain Diode Ratings and Characteristics

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit.
IS	Maximum Continuous Drain-Source Diode Forward Current		-	-	10	A
ISM	Maximum Pulsed Drain-Source Diode Forward Current		-	-	26	
VSD	Diode Forward Voltage	IS =5.0A, VGS =0V	-	-	1.5	V
trr	Reverse Recovery Time	IS =5.0A, VGS=0V, dIF/dt=100A/us	-	240	-	nS
Qrr	Reverse Recovery Charge		-	3.1	-	uC

NOTES

1. Repetitive Rating: Pulse width limited by maximum junction temperature
2. IAS=2A, VDD=50V, Starting TJ=25 °C
3. ISD≤ID, di/dt ≤ 200A/us, VDD ≤ BVDSS, Starting TJ = 25 °C
4. Essentially Independent of Operating Temperature Typical Characteristics

Typical Performance Characteristics

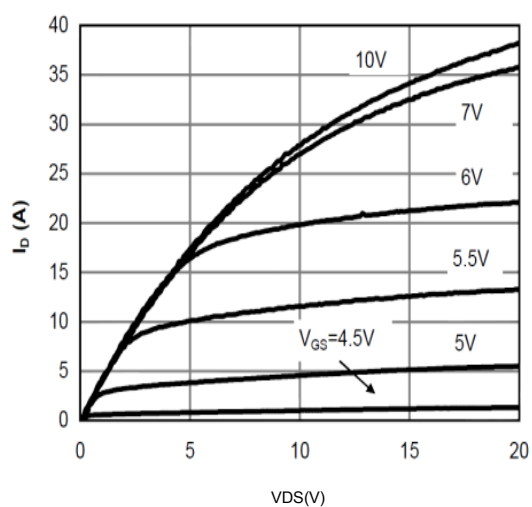


Figure 1: On-Region Characteristics@25°C

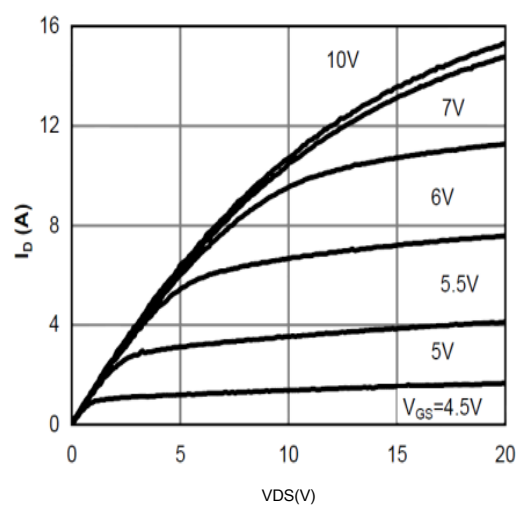


Figure 2: On-Region Characteristics@125°C

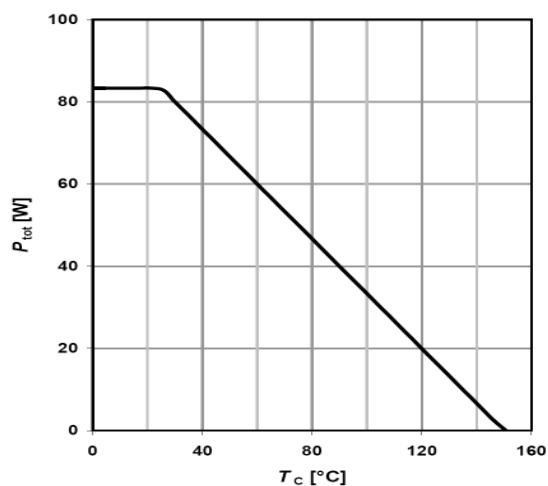


Figure 3: Power Dissipation

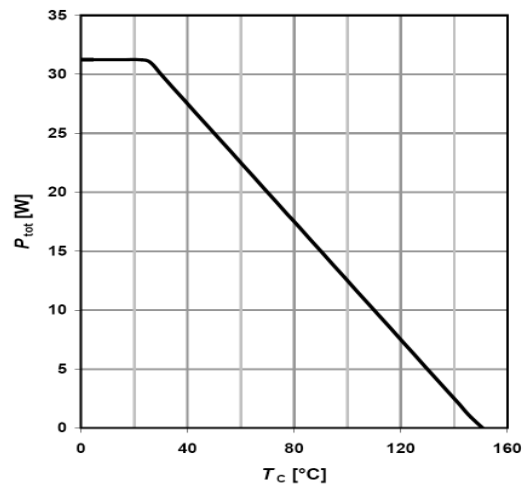


Figure 4 : Power dissipation

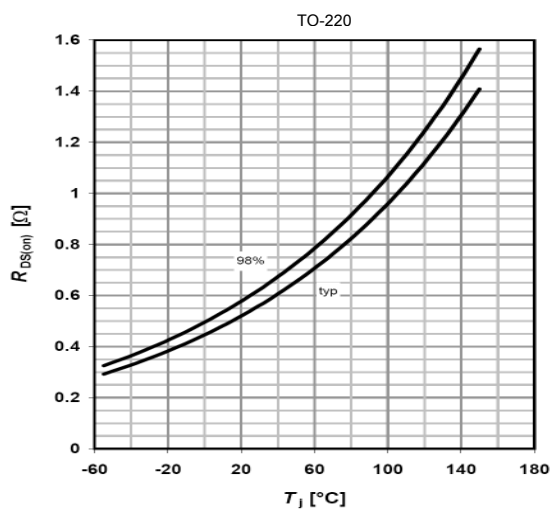
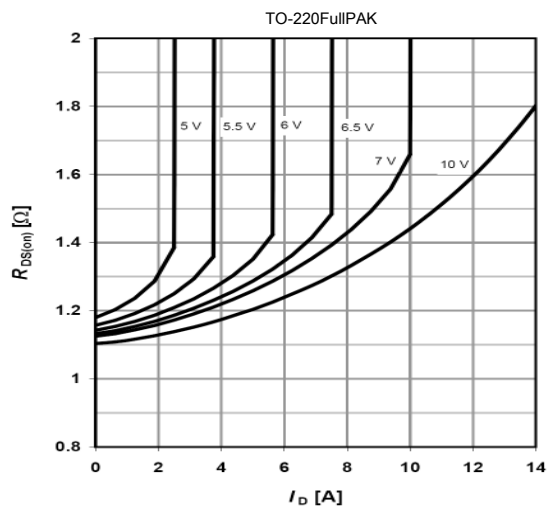


Figure 5: On-Resistance vs. Junction Temperature

Figure 6: On-Resistance vs. Drain Current, T_J=125°C

Typical Performance Characteristics

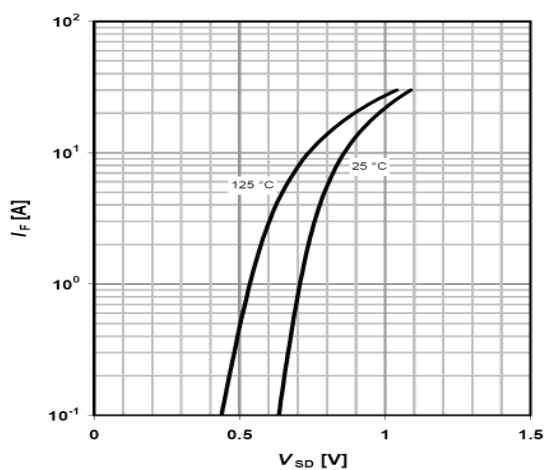


Figure 7: Body-Diode Characteristics

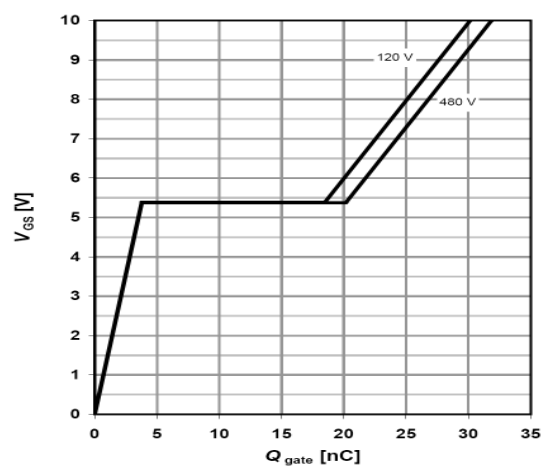


Figure 8: Gate-Charge Characteristics

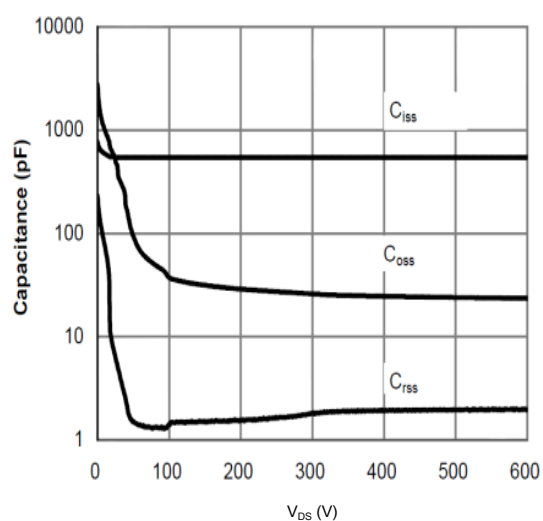


Figure 9: Capacitance Characteristics

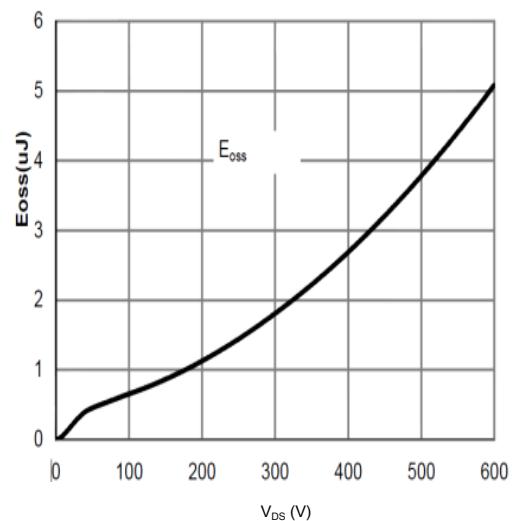
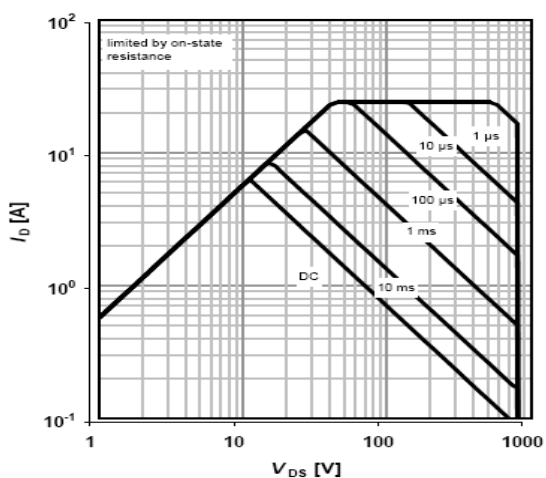
Figure 10: C_{oss} stored Energy

Figure 11: Maximum Forward Biased Safe Operating Area

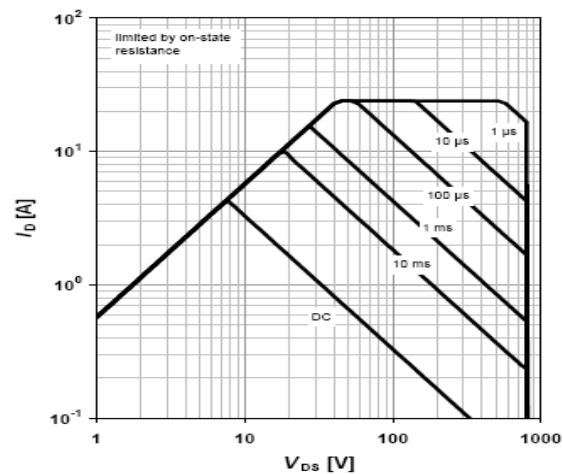
TO-220, $T_c=25^{\circ}\text{C}$ 

Figure 12: Maximum Forward Biased Safe Operating Area

TO-220 FullPAK, $T_c=25^{\circ}\text{C}$

Typical Performance Characteristics

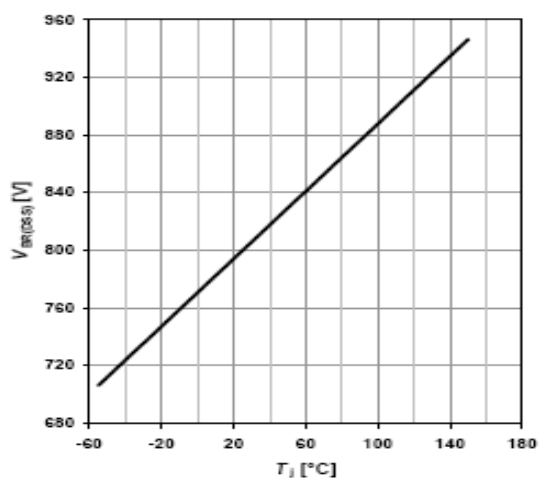


Figure 13: Break Down vs. Junction Temperature

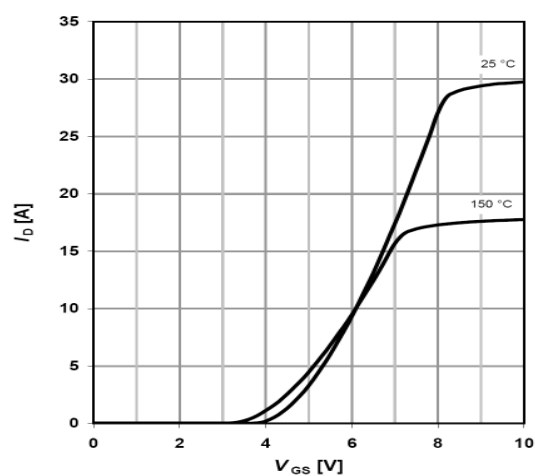


Figure 14: Typical transfer characteristics

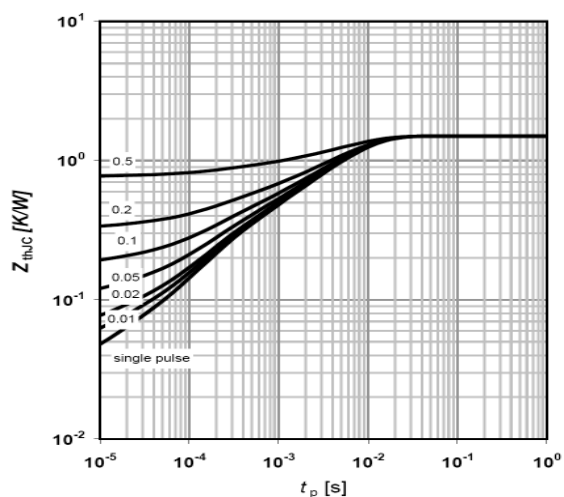


Figure 15: Maximum Transient Thermal Impedance

TO-220

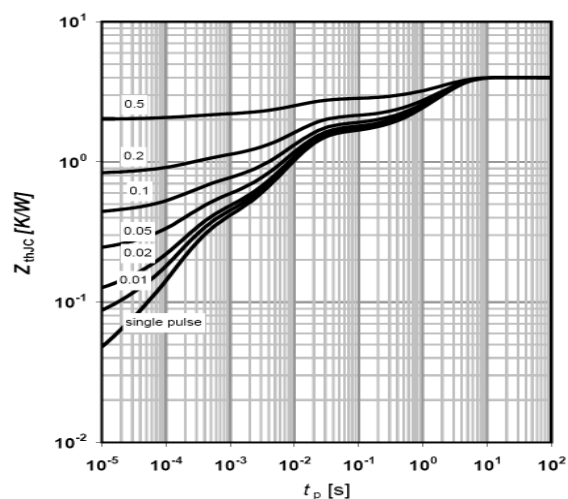


Figure 16: Maximum Transient Thermal Impedance

TO-220 FullPAK





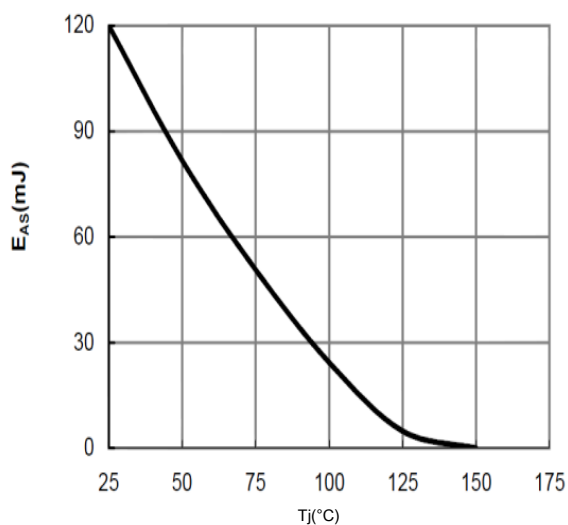


Figure 17: Avalanche energy



Gate Charge Test Circuit & Waveform

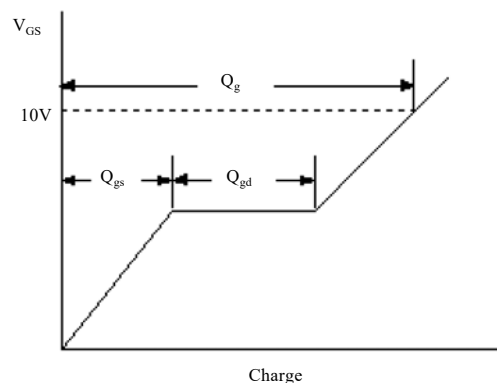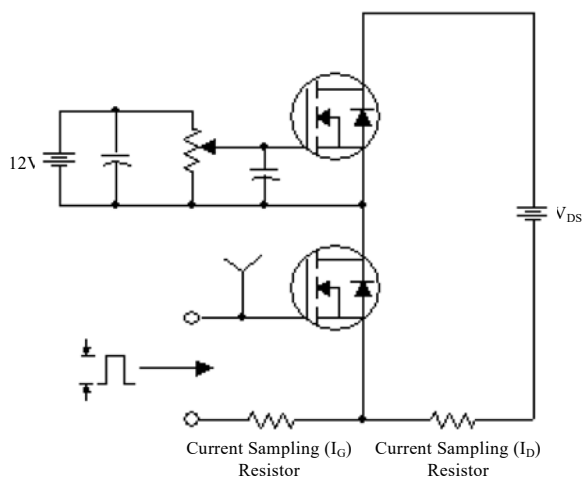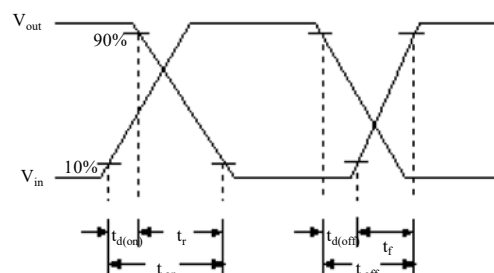

Resistive Switching Test Circuit & Waveforms

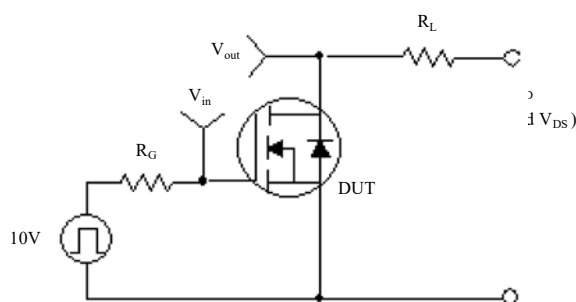

Unclamped Inductive Switching Test Circuit & Waveforms

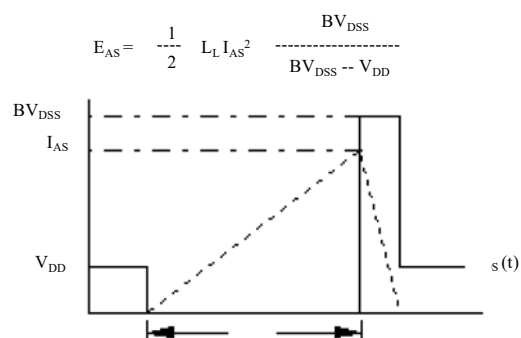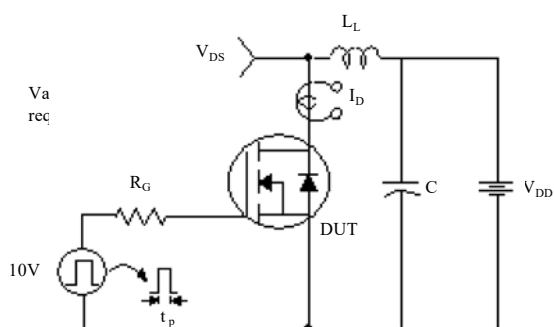

$$E_{AS} = \frac{1}{2} L_L I_{AS}^2 \frac{BV_{DSS}}{BV_{DSS} - V_{DD}}$$

Peak Diode Recovery dv/dt Test Circuit & Waveforms

