

RoHS Compliant Product
 A suffix of "-C" specifies halogen & lead-free


FEATURES

- Ideal for surface mount applications
- Easy pick and place
- Built-in strain relief
- Low forward voltage drop

PACKAGING INFORMATION

- Case: Molded Plastic
- Epoxy: UL 94V-0 Rate Flame Retardant
- Metallurgically bonded construction
- Polarity: Color Band Denotes Cathode End
- Mounting Position: Any

DO-214AA (SMB)

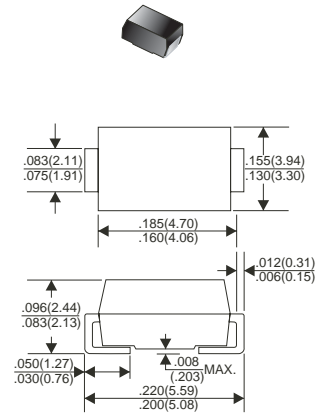

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
 Single phase half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.


TYPE NUMBER	SYMBOL	SM1200B	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	V
Working Peak Reverse Voltage	V_{RWM}	200	
Maximum DC Blocking Voltage	V_R	200	
Maximum Average Forward Rectified Current See Fig. 1	$I_{F(AV)}$	1.0	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	25	A
Maximum Instantaneous Forward Voltage @ $I_F=1A$ $T_A=25^\circ C$ (Note: 3) @ $I_F=1A$ $T_A=125^\circ C$	V_F	0.9 0.72	V
Maximum DC Reverse Current @ $T_A = 25^\circ C$	I_R	30	uA
At Rated DC Blocking Voltage @ $T_A = 125^\circ C$ (Note: 3)		5	mA
Typical Junction Capacitance (Note1)	C_J	50	pF
Typical Thermal Resistance	$R_{\theta JL}$	25	°C/W
Operating Temperature Range	T_J	-50 ~ + 150	°C
Storage temperature	T_{STG}	-65 ~ + 175	°C

NOTES:


1. Measured at 1MHz and applied reverse voltage of 4.0 V D.C.
2. Thermal Resistance Junction to Lead.
3. Pulse test: 300us pulse width, 1% duty cycle

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

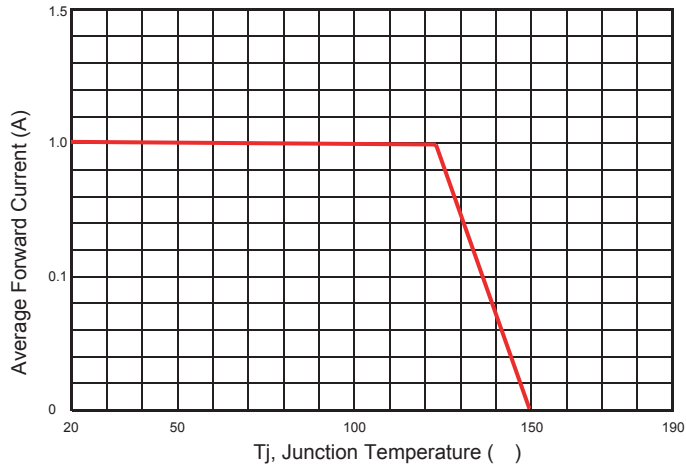


Typical Forward Characteristic

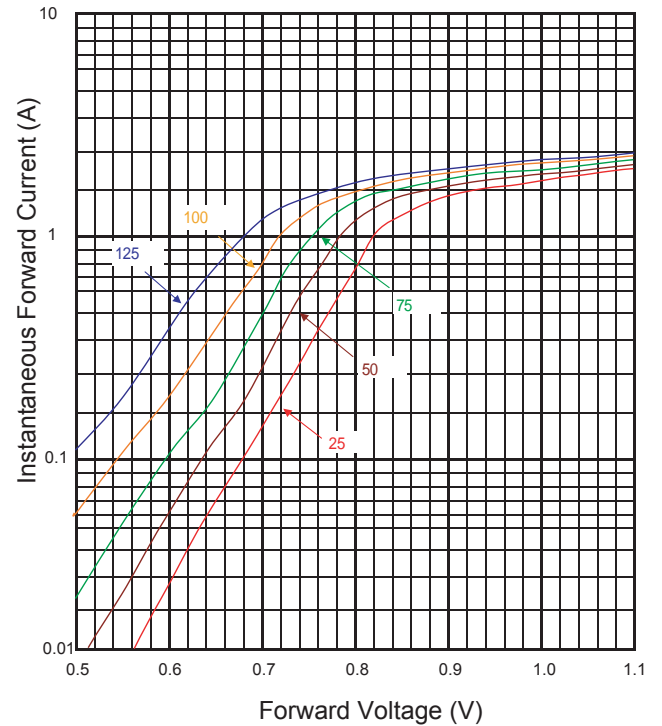

Maximum Non- Repetitive Forward Surge Current

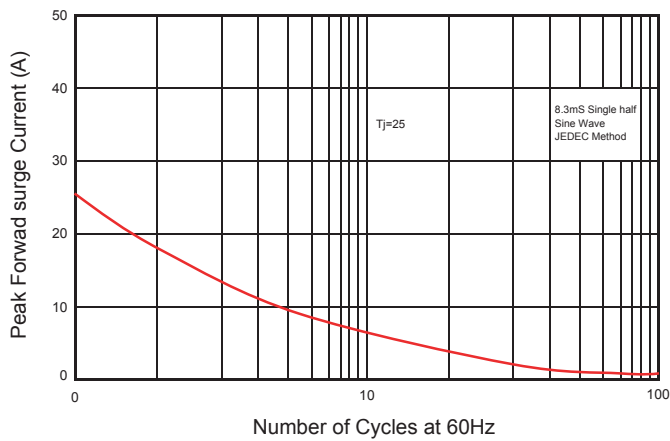

Typical Reverse Characteristic

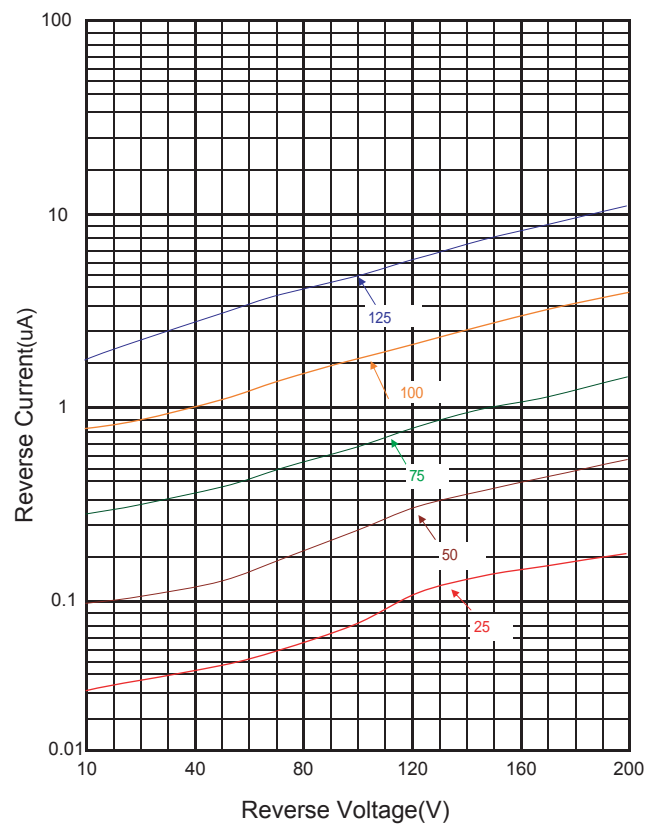

Typical Junction Capacitance

