

RoHS Compliant Product
A suffix of "-C" specifies and halogen-free


FEATURES

- Schottky barrier rectifier
- Guardring protection
- Low forward voltage
- Reverse energy tested
- High current capability
- Extremely low thermal resistance

MECHANICAL DATA

- Case: SOD-123T molded plastic body
- Polarity: Color band denotes cathode end
- Mounting position: Any


SOD-123T

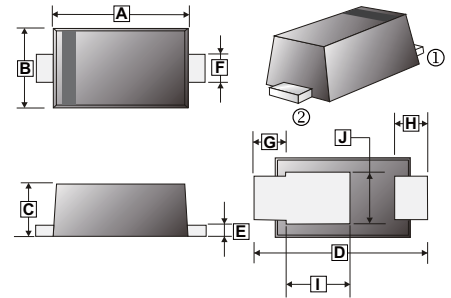

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.60	3.00	F	0.70	1.15
B	1.70	2.10	G	0.80 Typ.	
C	0.90	1.35	H	0.30	0.90
D	3.45	3.95	I	1.2 Typ.	
E	0.20 Typ.		J	0.85	1.15

PACKAGE INFORMATION

Package	MPQ	Leader Size
SOD-123T	2.5K	7' inch



MARKING CODE

Part Number	Marking Code	Part Number	Marking Code
SM22T	S22	SM26T	S26
SM23T	S23	SM28T	S28
SM24T	S24	SM29T	S29
SM25T	S25	SM210T	S2A

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$ unless otherwise specified.)

Parameter	Symbol	Part Number								Units	Test Conditions
		SM 22T	SM 23T	SM 24T	SM 25T	SM 26T	SM 28T	SM 29T	SM 210T		
Recurrent Peak Reverse Voltage (Max.)	V_{RRM}	20	30	40	50	60	80	90	100	V	
RMS Voltage (Max.)	V_{RMS}	14	21	28	35	42	56	63	70	V	
Reverse Voltage (Max.)	V_R	20	30	40	50	60	80	90	100	V	
Forward Voltage (Max.)	V_F	0.50		0.75		0.85			V	$I_{FM}=2.0A$ (Note 1)	
Forward Rectified Current (Max.)	$I_{F(AV)}$	2								A	$T_L=90^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	50								A	8.3ms single half sine-wave superimposed on rated load (JEDEC method)
Reverse Current (Max.)	I_R	0.4			0.03			mA	$T_J=25^\circ\text{C}$		
		10			5				$T_J=125^\circ\text{C}$		
Thermal Resistance (Max.)	$R_{\theta JL}$	28								$^\circ\text{C/W}$	Junction to Lead
Operating Temperature Range	T_J	-55 ~ 125								$^\circ\text{C}$	
Storage Temperature Range	T_{STG}	-55 ~ 150								$^\circ\text{C}$	

Note:

1. Pulse test : Pulse width 300 μs , duty cycle 1%

CHARACTERISTIC CURVES

FIG.1 – FORWARD DERATING CURVE

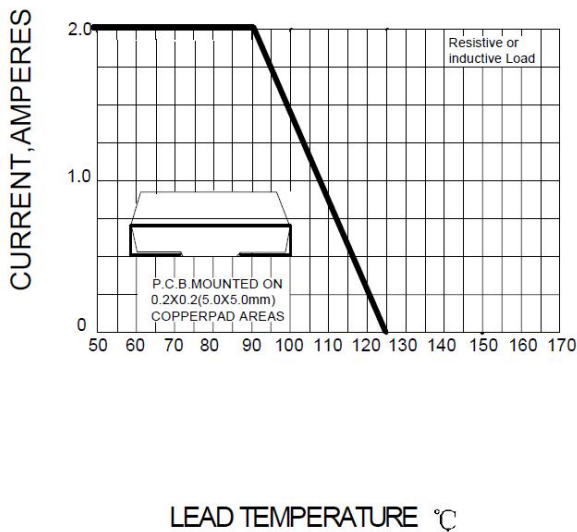


FIG.2– PEAK FORWARD SURGE CURRENT

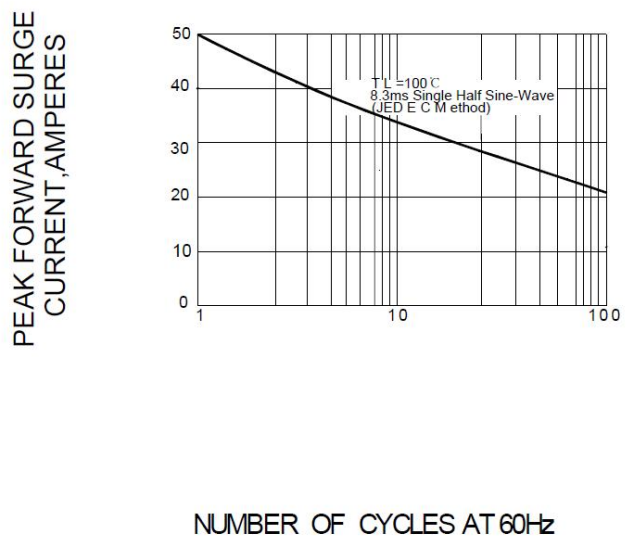


FIG.3 – TYPICAL FORWARD CHARACTERISTICS

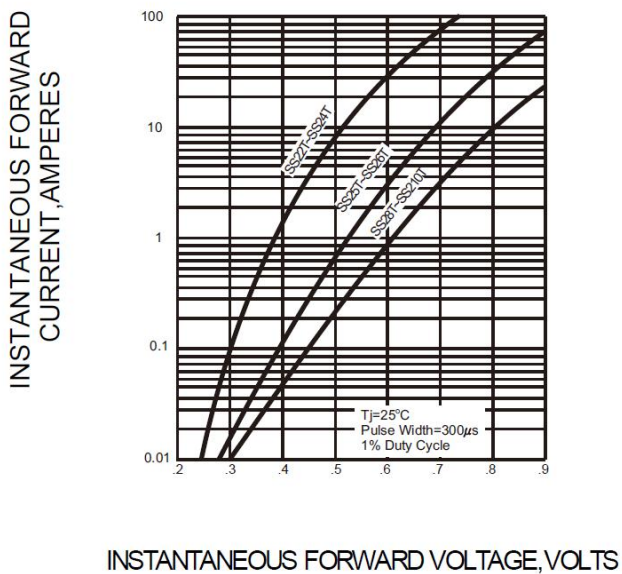


FIG.4 – TYPICAL REVERSE CHARACTERISTICS

