

RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free


**FEATURES**

- Low profile package
- Glass Passivated Chip Junction
- Low reverse current

**MECHANICAL DATA**

- Case : SMAM
- Terminals: Solderable per MIL-STD-750, Method 2026
- Weight: 27 mgram (Approximate)

**SMAM**

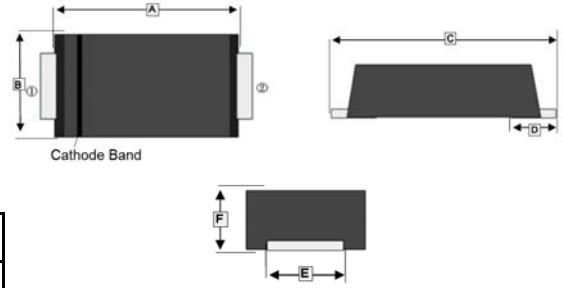


**MARKING**

Part Number	Marking Code	Part Number	Marking Code
SM320AM-C	SS34	SM3100AM-C	SS310
SM340AM-C	SS34	SM3150AM-C	SS315
SM360AM-C	SS36	SM3200AM-C	SS320

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	3.20	3.70	D	1 TYP.	
B	2.40	2.80	E	1.30	1.60
C	4.40	4.90	F	0.90	1.20

**PACKAGE INFORMATION**

Package	MPQ	Leader Size
SMAM	3K	7 inch



**ORDER INFORMATION**

Part Number	Type
SM320AM-C~SM3200AM-C	Lead (Pb)-free and Halogen-free

**ABSOLUTE MAXIMUM RATINGS**

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Part Number						Unit
		SM320 AM-C	SM340 AM-C	SM360 AM-C	SM3100 AM-C	SM3150 AM-C	SM3200 AM-C	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	20	40	60	100	150	200	V
Maximum RMS Voltage	$V_{RMS}$	14	28	42	70	105	140	V
Maximum DC Blocking Voltage	$V_{DC}$	20	40	60	100	150	200	V
Maximum Average Forward Rectified Current	$I_F$	3						A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	80			70			A
Maximum Instantaneous Forward Voltage $I_F=3A @ 25^\circ C$	$V_F$	0.55	0.7	0.85	0.95			V
Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_A=25^\circ C$	0.5		0.3				mA
	$T_A=100^\circ C$	10		5				
Typical Junction Capacitance <sup>1</sup>	$C_J$	250			160			pF
Typical Thermal Resistance <sup>2</sup>	$R_{\theta JL}$	22						°C/W
Operating & Storage Temperature	$T_J, T_{STG}$	-55~150						°C

Notes:

1. Measured at 1MHz and applied reverse voltage of 4 V D.C.
2. P.C.B. mounted with 10 X 10 x 0.2 mm copper pad areas.

**RATINGS AND CHARACTERISTIC CURVES**

Fig.1 Forward Current Derating Curve

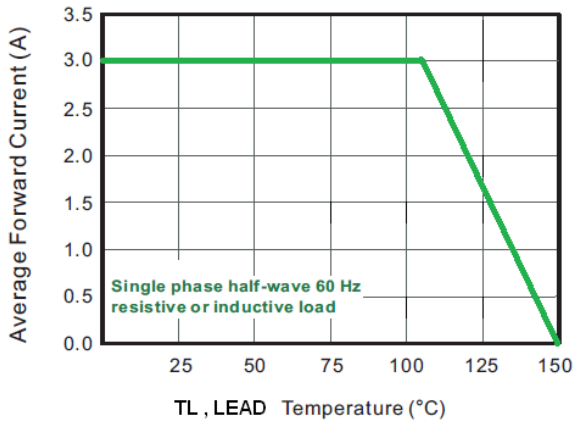


Fig.2 Typical Reverse Characteristics

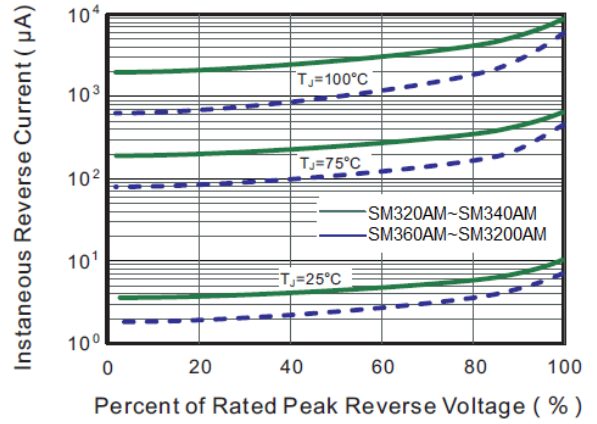


Fig.3 Typical Forward Characteristic

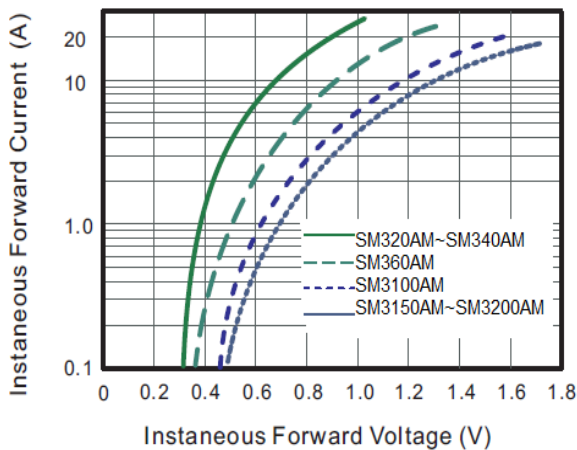


Fig.4 Typical Junction Capacitance

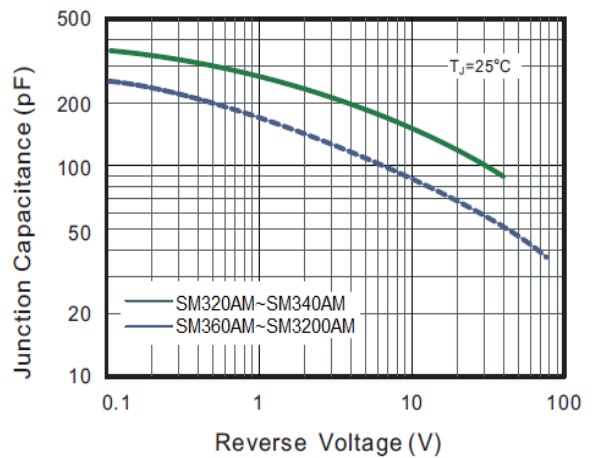


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

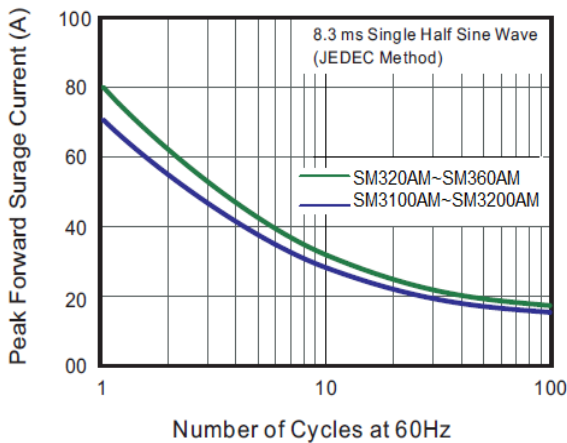


Fig.6 Typical Transient Thermal Impedance

