


## TVS DIODE ARRAY

## SM36

### FEATURES

- 300 watts peak pulse power.(tp=8/20us)
- Transient protection for data&power lines to  
**IEC 61000-4-2(ESD)15Kv(air),8kV(contact)**  
**IEC 61000-4-4(EFT)40A(tp=5/50ns)**  
**IEC 61000-4-5(Lighting)12A(tp=1.2/50us)**
- Protects one bidirectional line or two unidirectional lines.
- Working Voltage: 36V.
- Low clamping voltage.
- Solid-state silicon avalanche technology.

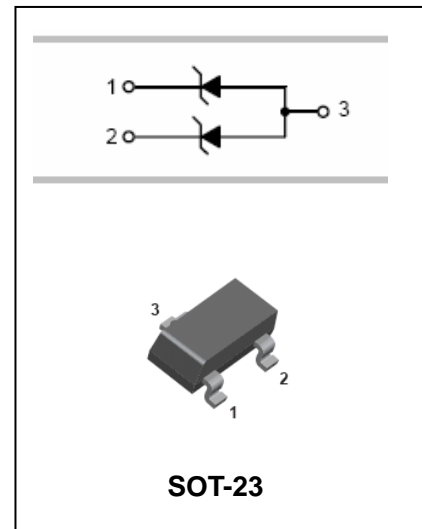

### APPLICATIONS

- Cellular Handsets and Accessories
- Portable Electronics
- Industrial Controls
- Set-Top Box
- Servers, Notebook, and Desktop PC

### ORDERING INFORMATION

Type No.	Marking	Package Code
SM36	M36	SOT-23

### MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Ratings	Units
P <sub>PK</sub>	Peak Pulse Power(tp=8/20us)	300	Watts
θ <sub>JA</sub>	Thermal Resistance, Junction to Ambient	556	°C/W
T <sub>L</sub>	Lead Soldering Temperature	260(10sec.)	°C
T <sub>J</sub>	Operating Temperature	-55 to +125	°C
T <sub>STG</sub>	Storage Temperature	-55 to +150	°C



**TVS DIODE ARRAY**


**SM36**

**ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**



Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Reverse Stand-Off Voltage	$V_{RWM}$				36	V
Reverse Breakdown Voltage	$V_{BR}$	$I_t=1mA$	40			V
Reverse Leakage Current	$I_R$	$V_{RWM}=36V, T=25^\circ C$			1	$\mu A$
Clamping Voltage	$V_C$	$I_{pp}=1A, t_p=8/20\mu s$			60	V
Maximum Peak Pulse Current	$I_{pp}$	$t_p=8/20\mu s$			4	A
Junction Capacitance	$C_j$	Pin 1 to 2 $V_R=0V, f=1MHz$			40	pF
Junction Capacitance	$C_j$	Pin 1 to 3 and Pin 2 to 3 $V_R=0V, f=1MHz$			45	pF

**TYPICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified**

**Non-Repetitive Peak Pulse Power vs. Pulse Time**

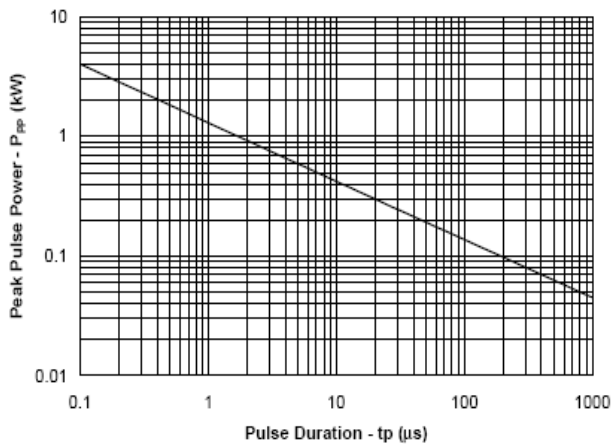

**Power Derating Curve**

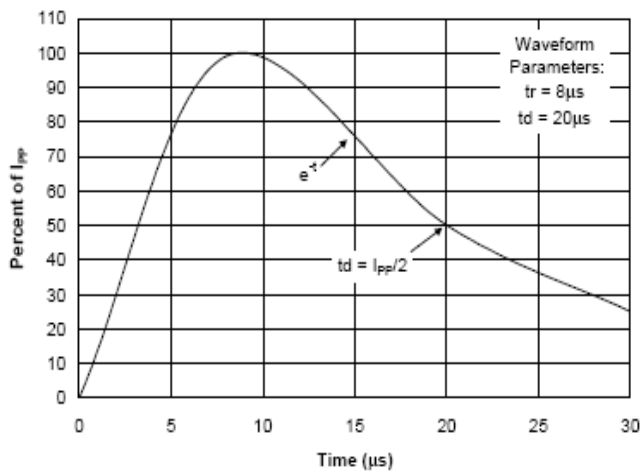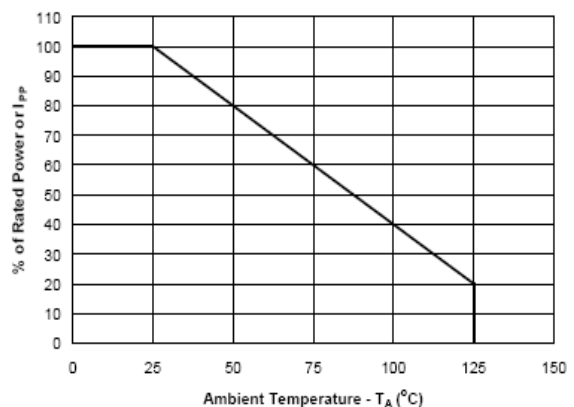


# TVS DIODE ARRAY

# SM36


## PACKAGE OUTLINE

Plastic surface mounted package

SOT-23

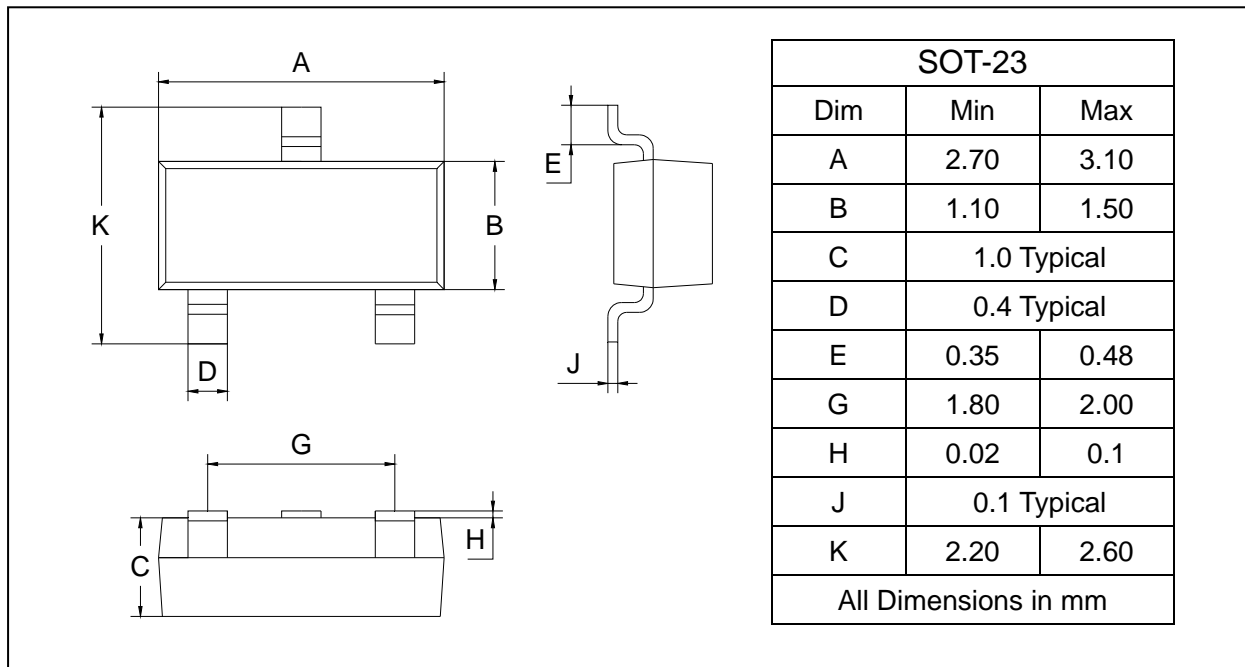

## SOLDERING FOOTPRINT

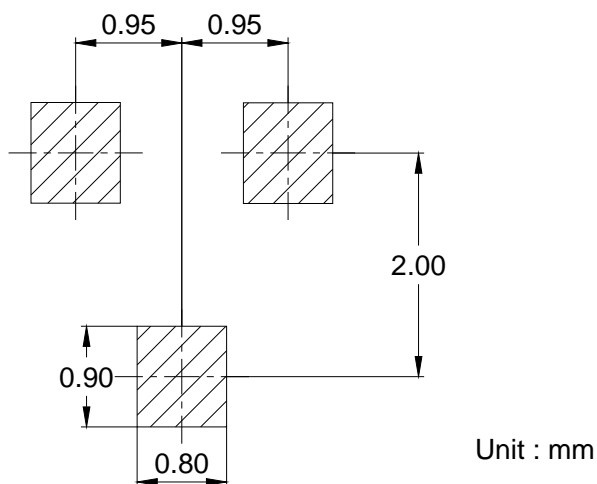

## PACKAGE INFORMATION

Device	Package	Shipping
SM36	SOT-23	3000/Tape&Reel