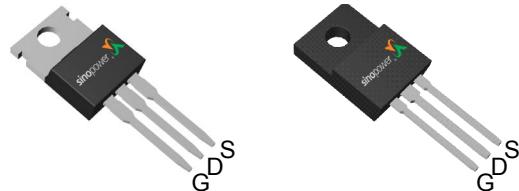


N-Channel Enhancement Mode MOSFET

Features

- 800V/8A,
 $R_{DS(ON)} = 0.78\Omega(\text{max.}) @ V_{GS} = 10V$
 $V_{DS} @ T_j, \text{max}=930V (\text{typ.})$
- Reliable and Rugged
- Avalanche Rated
- Lead Free and Green Devices Available
(RoHS Compliant)


Pin Description

TO-220

TO-220-FP



TO-247




N-Channel MOSFET

Applications

- AC/DC Power Conversion in Switched Mode Power Supplies (SMPS).
- Uninterruptible Power Supply (UPS),
- Adapter.

Ordering and Marking Information

SM8A03NS 	Assembly Material Handling Code Temperature Range Package Code	Package Code F : TO-220 FP : TO-220-FP W : TO-247 Operating Junction Temperature Range C : -55 to 150 °C Handling Code TU : Tube (TO-220/TO-220FP, 50ea/tube) (TO-247, 30ea/tube) Assembly Material G : Halogen and Lead Free Device
SM8A03NS F/FP/W : 		XXXXX - Lot Code

Note: SINOPOWER lead-free products contain molding compounds/die attach materials and 100% matte tin plate termination finish; which are fully compliant with RoHS. SINOPOWER lead-free products meet or exceed the lead-free requirements of IPC/JEDEC J-STD-020D for MSL classification at lead-free peak reflow temperature. SINOPOWER defines "Green" to mean lead-free (RoHS compliant) and halogen free (Br or Cl does not exceed 900ppm by weight in homogeneous material and total of Br and Cl does not exceed 1500ppm by weight).

SINOPOWER reserves the right to make changes to improve reliability or manufacturability without notice, and advise customers to obtain the latest version of relevant information to verify before placing orders.

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
Common Ratings ($T_A=25^\circ\text{C}$ Unless Otherwise Noted)			
V_{DSS}	Drain-Source Voltage	800	V
V_{GSS}	Gate-Source Voltage	± 30	
T_J	Maximum Junction Temperature	150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	
I_S	Diode Continuous Forward Current	8 ^a	A
I_{DP}	300 μs Pulse Drain Current Tested	$T_c=25^\circ\text{C}$ 16 ^a	
I_D	Continuous Drain Current	$T_c=25^\circ\text{C}$ 8 ^a	
		$T_c=100^\circ\text{C}$ 5 ^a	
P_D	Maximum Power Dissipation for TO-220/TO-247	$T_c=25^\circ\text{C}$ 138	W
		$T_c=100^\circ\text{C}$ 55	
P_D	Maximum Power Dissipation for TO-220FP	$T_c=25^\circ\text{C}$ 31	
		$T_c=100^\circ\text{C}$ 12.5	
$R_{\theta JC}$	Thermal Resistance-Junction to Case for TO-220/TO-247	0.9	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance-Junction to Case for TO-220FP	4	
$R_{\theta JA}$	Thermal Resistance-Junction to Ambient	62.5	
Drain-Source Avalanche Ratings			
dv/dt ^b	MOSFET dv/dt ruggedness	50	V/ns
E_{AS} ^c	Avalanche Energy, Single Pulsed	130	mJ
I_{AR} ^d	Avalanche Current	2.5	A
E_{AR} ^d	Repetitive Avalanche Energy	0.3	mJ

Note a : limited by maximum junction temperature.

Note b : $V_{DS}=640\text{V}$, $I_D=8\text{A}$.

Note c : $I_D=1.8\text{A}$, $V_{DD}=50\text{V}$, $T_j=25^\circ\text{C}$.

Note d : Repetitive Rating : Pulse width limited by maximum junction temperature.

Electrical Characteristics $(T_A = 25^\circ\text{C} \text{ Unless Otherwise Noted})$


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}, I_{DS}=250\mu\text{A}$	800	-	-	V
		$T_J=150^\circ\text{C}$	-	930	-	
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS}=640\text{V}, V_{GS}=0\text{V}$	-	-	1	μA
		$T_J=150^\circ\text{C}$	-	-	200	
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=V_{GS}, I_{DS}=250\mu\text{A}$	2.5	3.5	4.5	V
I_{GSS}	Gate Leakage Current	$V_{GS}=\pm 30\text{V}, V_{DS}=0\text{V}$	-	-	± 100	nA
$R_{DS(\text{ON})}^{\text{e}}$	Drain-Source On-state Resistance	$V_{GS}=10\text{V}, I_{DS}=4\text{A}$	-	0.68	0.78	Ω
Diode Characteristics						
V_{SD}^{e}	Diode Forward Voltage	$I_{SD}=8\text{A}, V_{GS}=0\text{V}$	-	0.82	1.3	V
t_{rr}	Reverse Recovery Time	$I_{SD}=8\text{A}, V_R=480\text{V}$ $dI_{SD}/dt=100\text{A}/\mu\text{s}$	-	330	-	ns
Q_{rr}	Reverse Recovery Charge		-	5.1	-	μC
I_{rm}	Peak Reverse Recovery Current		-	30	-	A
Dynamic Characteristics ^f						
R_G	Gate Resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, F=1\text{MHz}$	-	2.4	-	Ω
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=25\text{V},$ Frequency=1.0MHz	-	1075	1400	pF
C_{oss}	Output Capacitance		-	380	-	
C_{rss}	Reverse Transfer Capacitance		-	16	-	
$t_{d(ON)}$	Turn-on Delay Time	$V_{DD}=400\text{V}, I_{DS}=8\text{A}, V_{GEN}=10\text{V}, R_G=6\Omega$	-	13	-	ns
T_r	Turn-on Rise Time		-	28	-	
$t_{d(OFF)}$	Turn-off Delay Time		-	27	-	
T_f	Turn-off Fall Time		-	19	-	
Gate Charge Characteristics ^f						
Q_g	Total Gate Charge	$V_{DS}=640\text{V}, V_{GS}=10\text{V}, I_{DS}=8\text{A}$	-	27.5	37	nC
Q_{gs}	Gate-Source Charge		-	7	-	
Q_{gd}	Gate-Drain Charge		-	12	-	

Note e : Pulse test ; pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.


Note f : Guaranteed by design, not subject to production testing.

Typical Operating Characteristics


Power Dissipation : TO-220/TO-247

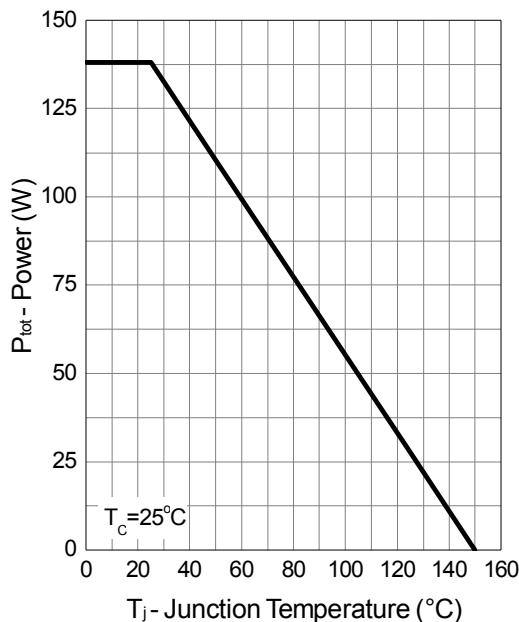


Power Dissipation : TO-220FP

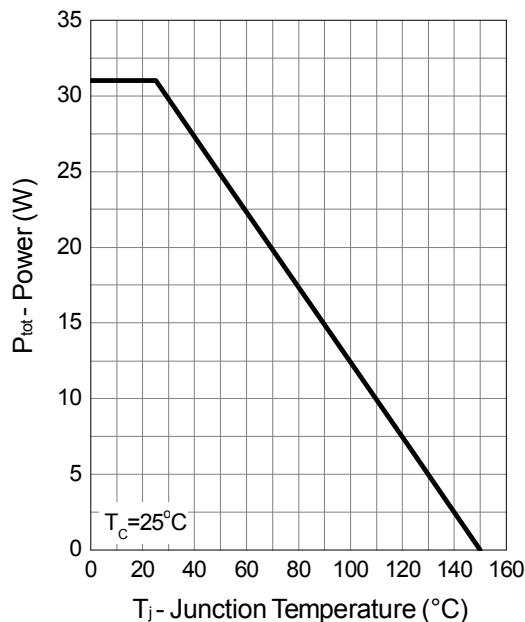





Safe Operation Area : TO-220/TO-247

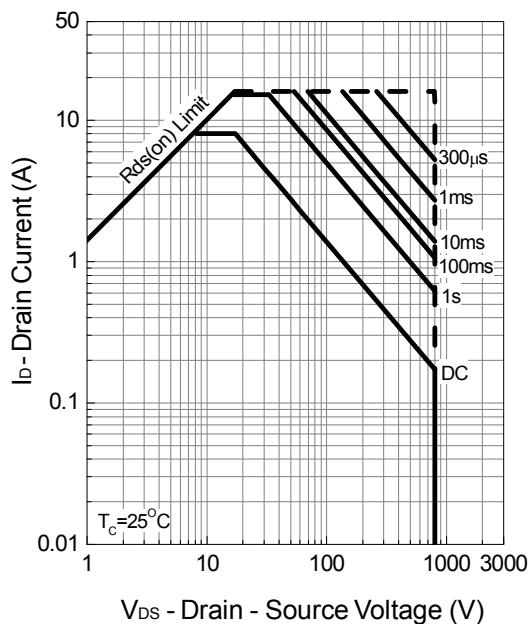





Safe Operation Area : TO-220FP

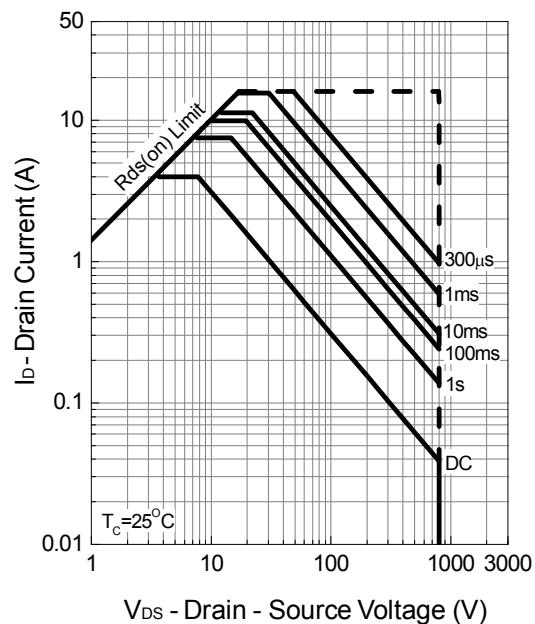





Typical Operating Characteristics (Cont.)

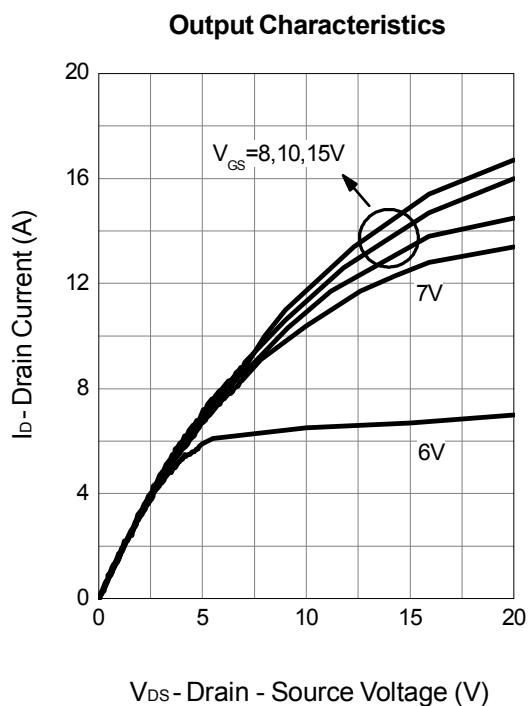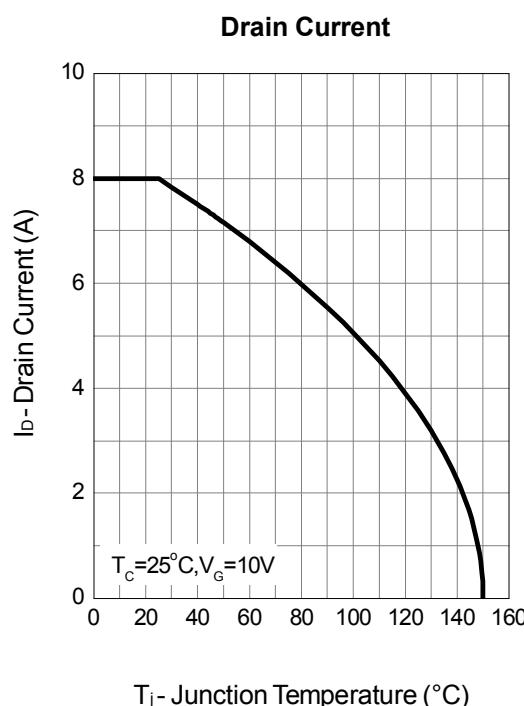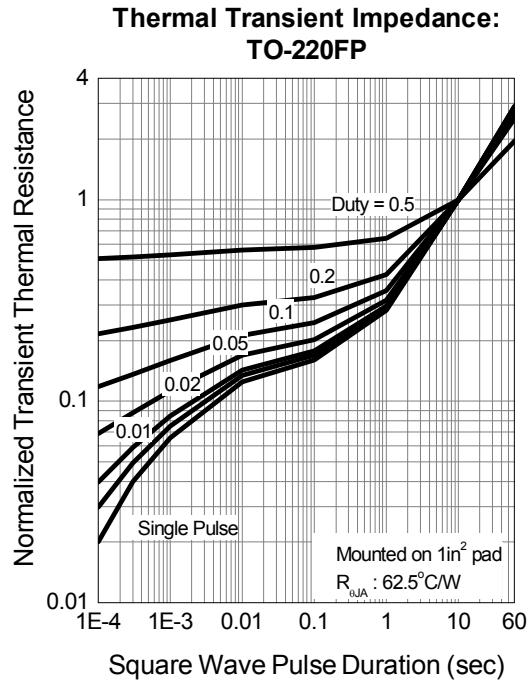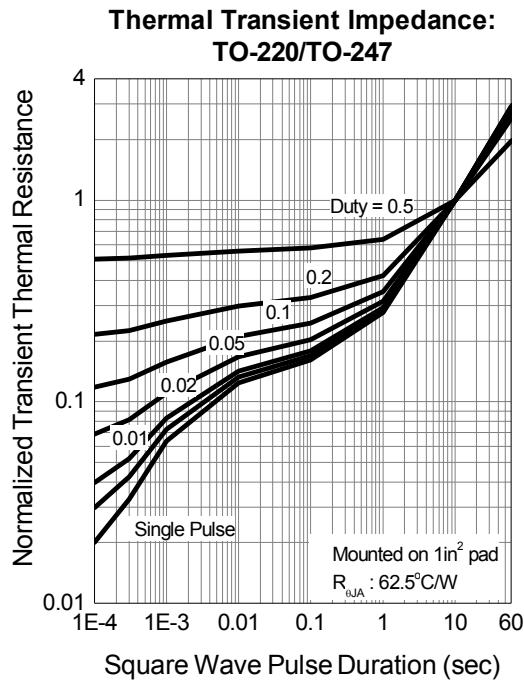


Typical Operating Characteristics (Cont.)

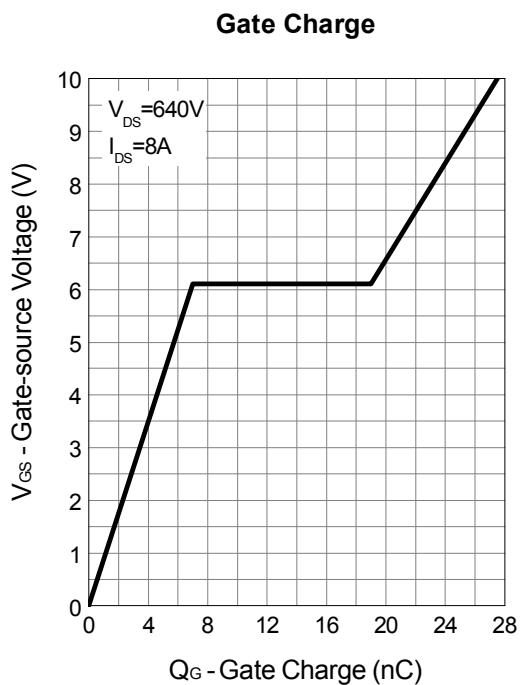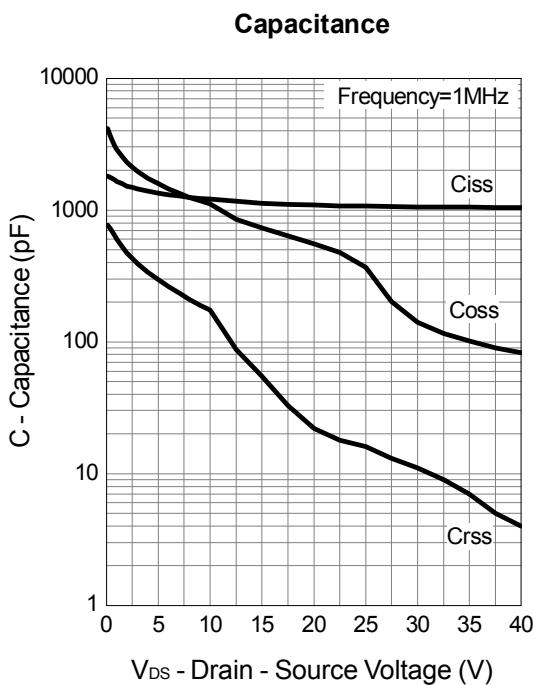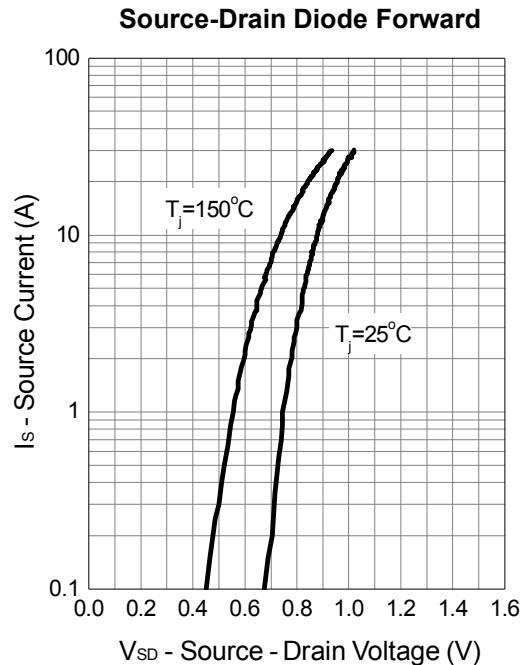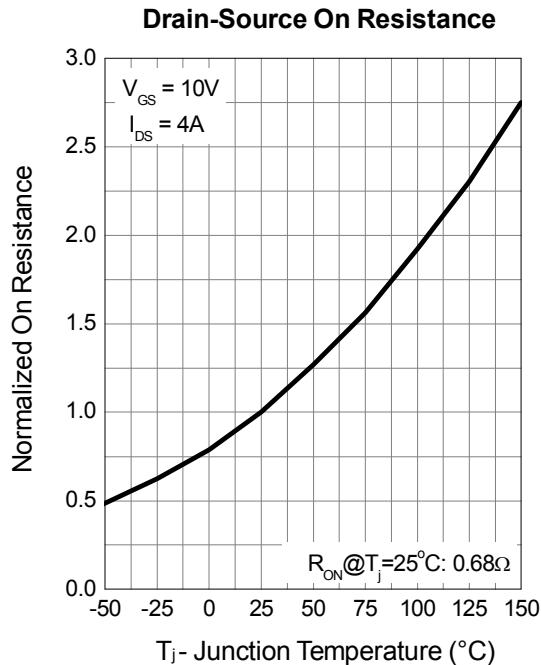


Typical Operating Characteristics (Cont.)

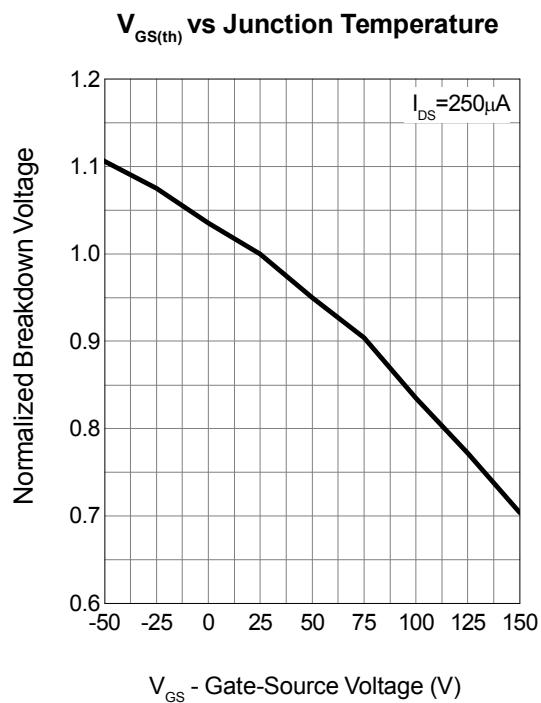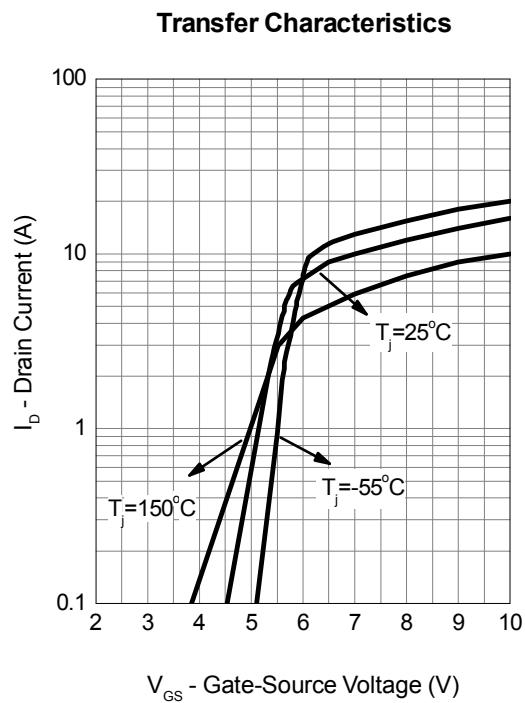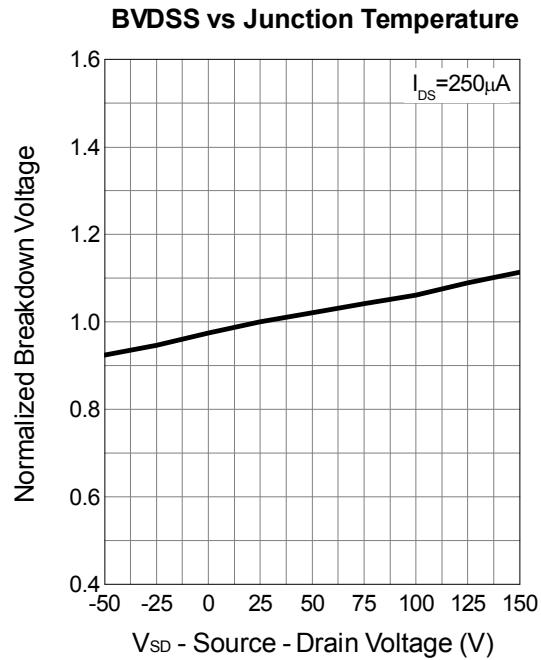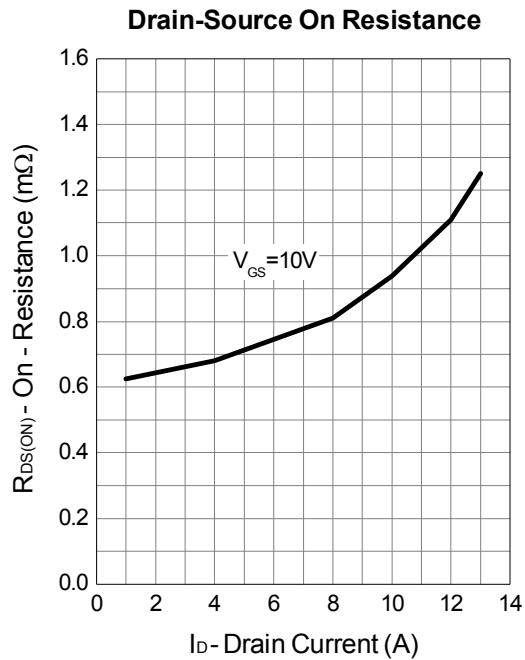

Avalanche Test Circuit and Waveforms

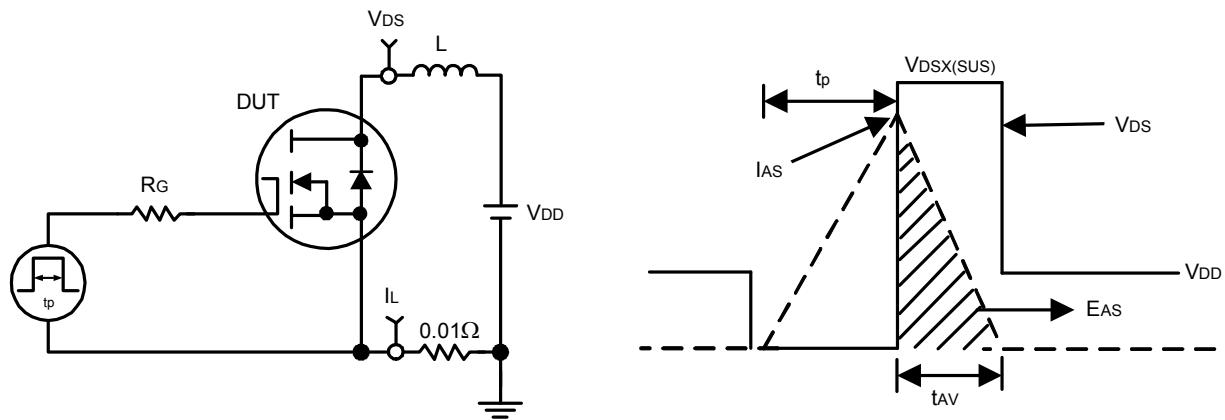


Switching Time Test Circuit and Waveforms

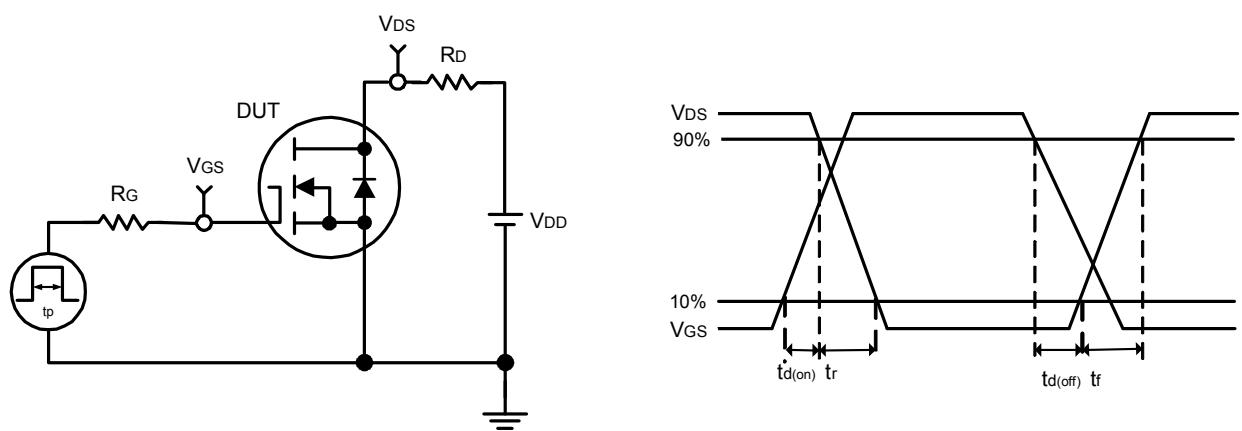

Package Information


TO-220

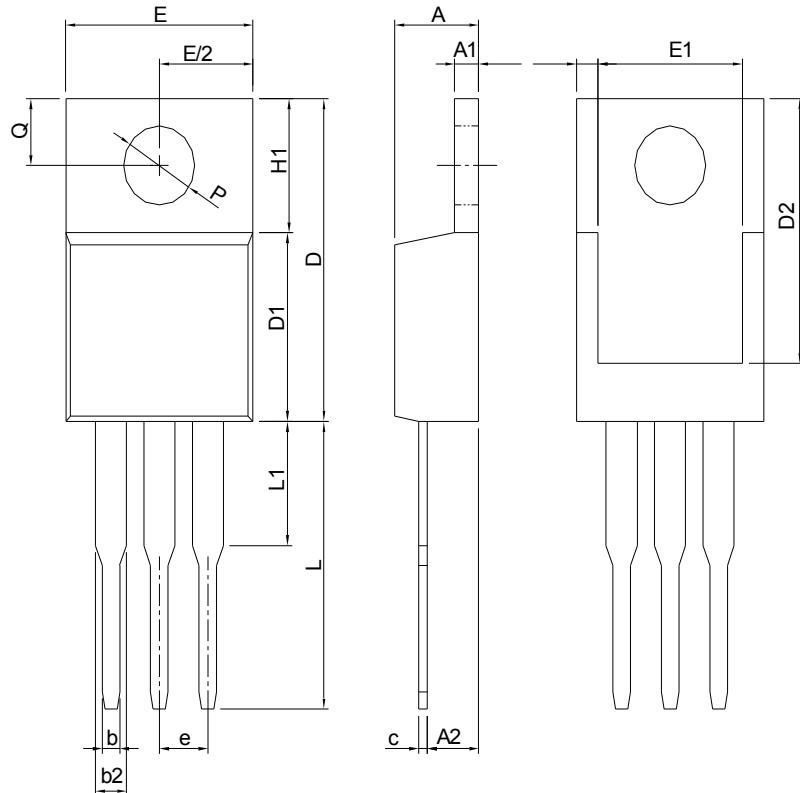

SYMBOL	TO-220			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	3.56	4.83	0.140	0.190
A1	0.51	1.40	0.020	0.055
A2	2.03	2.92	0.080	0.115
b	0.38	1.02	0.015	0.040
b2	1.14	1.78	0.045	0.070
c	0.36	0.61	0.014	0.024
D	14.22	16.51	0.560	0.650
D1	8.38	9.02	0.330	0.355
D2	12.19	13.65	0.480	0.537
E	9.65	10.67	0.380	0.420
E1	6.86	8.89	0.270	0.350
e	2.54 BSC		0.100 BSC	
H1	5.84	6.86	0.230	0.270
L	12.70	14.73	0.500	0.580
L1	-	6.35	-	0.250
P	3.53	4.09	0.139	0.161
Q	2.54	3.43	0.100	0.135

Note: Follow JEDEC TO-220 AB.


RECOMMENDED LAND PATTERN

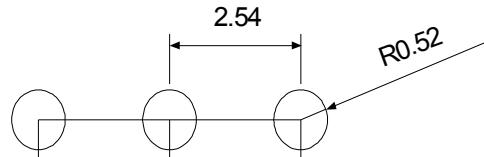

UNIT: mm


Package Information

TO-220-FP

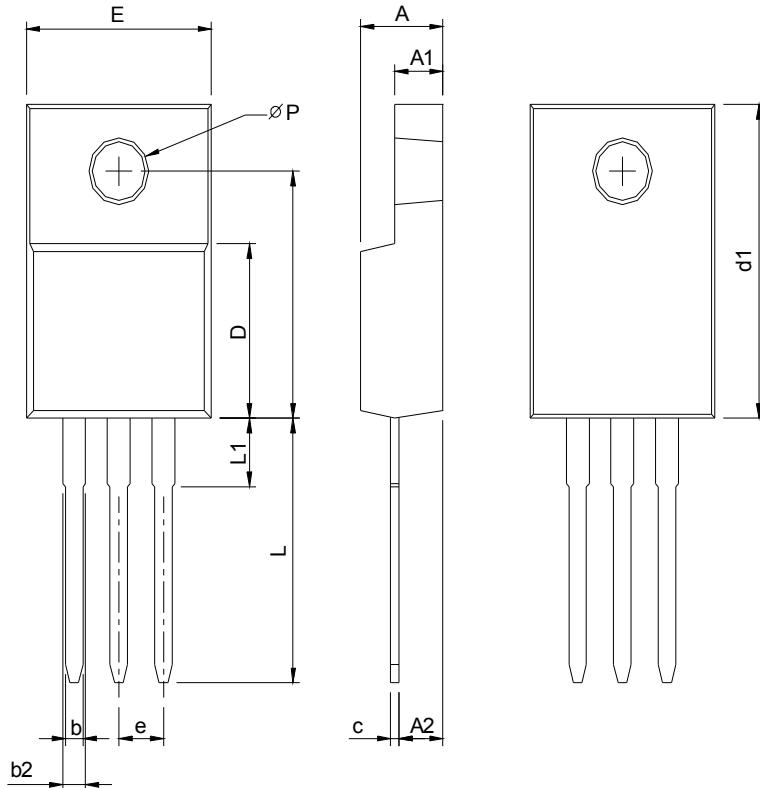

S Y M B O R E	TO-220FP			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	4.20	4.80	0.165	0.189
A1	2.60	3.20	0.102	0.126
A2	2.10	2.90	0.083	0.114
b	0.50	1.00	0.020	0.039
b2	0.90	1.90	0.035	0.075
c	0.30	0.80	0.012	0.031
D	8.10	9.10	0.319	0.358
d1	14.50	16.50	0.571	0.650
d2	12.10	12.90	0.476	0.508
E	9.70	10.70	0.382	0.421
e	2.54 BSC		0.100 BSC	
L	13.00	14.50	0.512	0.570
L1	1.60	4.00	0.063	0.157
P	3.00	3.60	0.118	0.142


RECOMMENDED LAND PATTERN

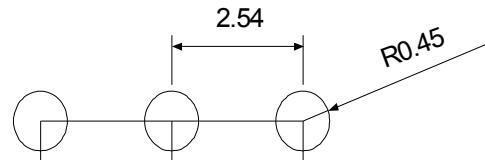

UNIT: mm


Package Information

TO-247

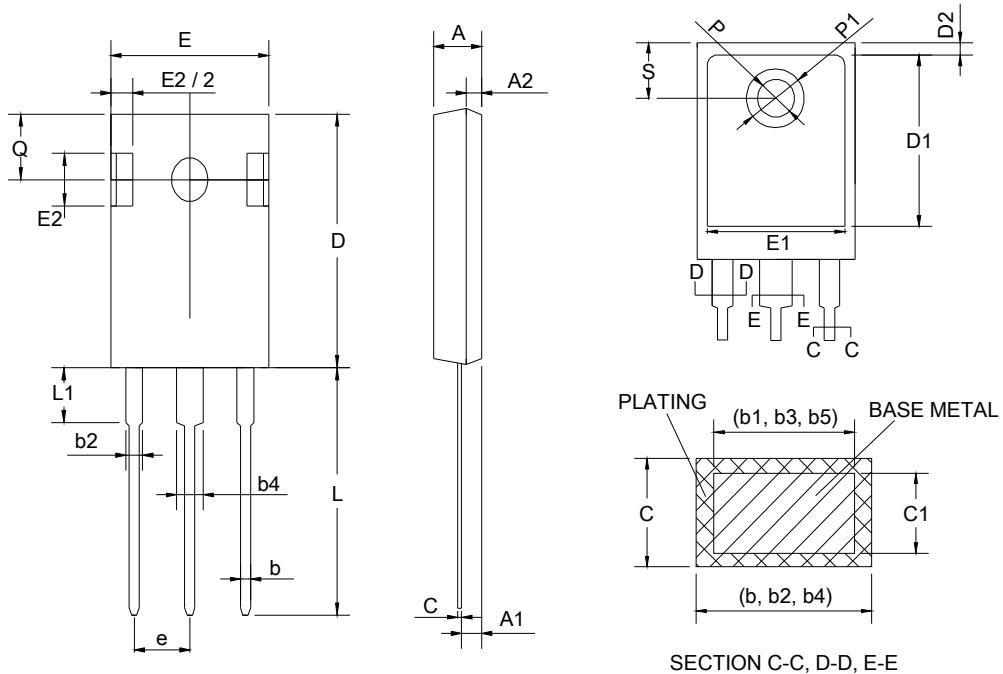


S P O C O D	TO-247			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	4.7	5.31	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.5	2.49	0.059	0.098
D	20.8	21.46	0.819	0.845
E	15.49	16.26	0.610	0.640
E2	4.32	5.49	0.170	0.216
e	5.46 BSC		0.215 BSC	
L	19.81	20.32	0.780	0.800
L1	-	4.5	-	0.177
P	3.56	3.66	0.140	0.144
Q	5.38	6.2	0.212	0.244
S	6.15 BSC		0.242 BSC	
b	0.99	1.4	0.039	0.055
b1	0.99	1.35	0.039	0.053
b2	1.65	2.39	0.065	0.094
b3	1.65	2.34	0.065	0.092
b4	2.59	3.43	0.102	0.135
b5	2.59	3.38	0.102	0.133
c	0.38	0.89	0.015	0.035
c1	0.38	0.84	0.015	0.033
D1	13.08	-	0.515	-
D2	0.51	1.35	0.020	0.053
E1	13.46	-	0.530	-
P1	-	7.4	-	0.291

RECOMMENDED LAND PATTERN

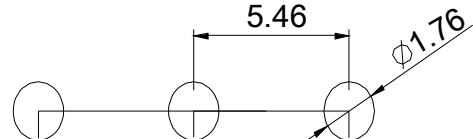

UNIT: mm

Classification Profile

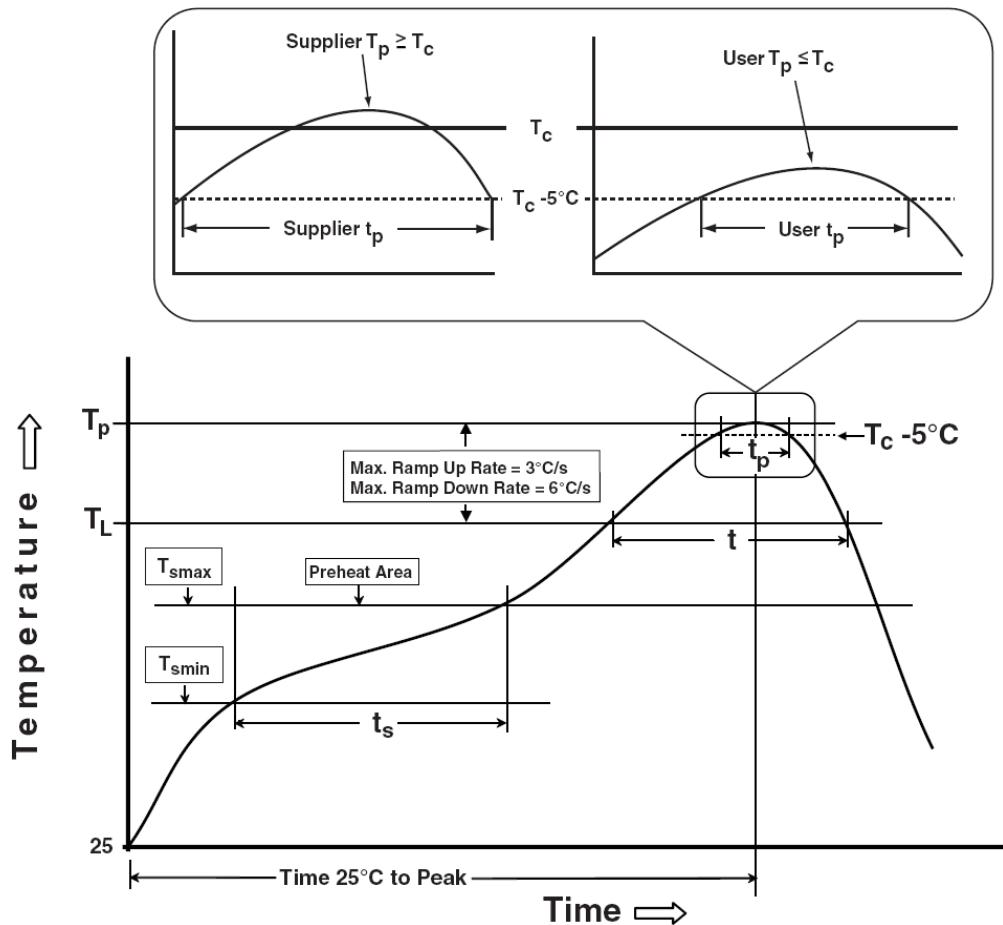

Classification Reflow Profiles

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Preheat & Soak Temperature min (T_{smin}) Temperature max (T_{smax}) Time (T_{smin} to T_{smax}) (t_s)	100 °C 150 °C 60-120 seconds	150 °C 200 °C 60-120 seconds
Average ramp-up rate (T_{smax} to T_p)	3 °C/second max.	3°C/second max.
Liquidous temperature (T_L) Time at liquidous (t_L)	183 °C 60-150 seconds	217 °C 60-150 seconds
Peak package body Temperature (T_p)*	See Classification Temp in table 1	See Classification Temp in table 2
Time (t_p)** within 5°C of the specified classification temperature (T_c)	20** seconds	30** seconds
Average ramp-down rate (T_p to T_{smax})	6 °C/second max.	6 °C/second max.
Time 25°C to peak temperature	6 minutes max.	8 minutes max.

* Tolerance for peak profile Temperature (T_p) is defined as a supplier minimum and a user maximum.

** Tolerance for time at peak profile temperature (t_p) is defined as a supplier minimum and a user maximum.

Table 1. SnPb Eutectic Process – Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ ≥350
<2.5 mm	235 °C	220 °C
≥2.5 mm	220 °C	220 °C

Table 2. Pb-free Process – Classification Temperatures (T_c)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6 mm	260 °C	260 °C	260 °C
1.6 mm – 2.5 mm	260 °C	250 °C	245 °C
≥2.5 mm	250 °C	245 °C	245 °C

Reliability Test Program

Test item	Method	Description
SOLDERABILITY	JESD-22, B102	5 Sec, 245°C
HTRB	JESD-22, A108	1000 Hrs, 80% of VDS max @ Tjmax
HTGB	JESD-22, A108	1000 Hrs, 100% of VGS max @ Tjmax
PCT	JESD-22, A102	168 Hrs, 100%RH, 2atm, 121°C
TCT	JESD-22, A104	500 Cycles, -65°C~150°C

Customer Service

Sinopower Semiconductor, Inc.

5F, No. 6, Dusing 1St Rd., Hsinchu Science Park,

Hsinchu, 30078, Taiwan

TEL: 886-3-5635818 Fax: 886-3-5642050