



Features

- **AEC-Q101 Qualified**
- **Ideally Suited for Load Dump Protection**
- Glass Passivated Die Construction
- Low Leakage Current
- Low Forward Voltage Drop
- High Surge Capability
- Meets ISO7637-2 and ISO16750-2 Surge Specification
- Plastic Material – UL Flammability 94V-0

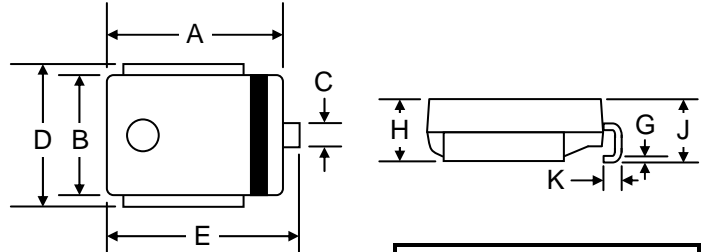

Mechanical Data

- Case: DO-218, Molded Plastic
- Terminals: Plated Leads Solderable per MIL-STD-202, Method 208
- Polarity: Anode to Heatsink
- Weight: 2.73 grams (approx.)
- Marking: Device Code
- **Lead Free: For RoHS / Lead Free Version, Add “-LF” Suffix to Part Number, See Page 5**



DO-218		
Dim	Min	Max
A	13.20	13.80
B	8.20	8.80
C	2.30	3.00
D	9.50	10.00
E	15.00	16.00
G	0.45	0.90
H	4.70	5.25
J	4.70	5.70
K	1.50	2.50
M	8.70	9.30
N	9.70	10.30
All Dimensions in mm		

Maximum Ratings @T_A=25°C unless otherwise specified

Characteristic		Symbol	Value	Unit
Peak Pulse Power Dissipation (Note 1)	on 10/1000μS Waveform	PPPM	6600	W
	on 10/10000μS Waveform		5200	
Peak Pulse Current (Note 1)		IPPM	See Table 1	A
Non-Repetitive Peak Reverse Surge Current on 10/10000μS Waveform		IRSM	130	A
Peak Forward Surge Current (Note 2)		IFSM	700	A
Maximum Instantaneous Forward Voltage at IF = 100A (Note 3)		VF	1.8	V
Power Dissipation on Infinite Heatsink at TC = 25°C		PD	8.0	W
Typical Thermal Resistance, Junction to Case		RJC	0.9	°C/W
Operating and Storage Temperature Range		TJ, TSTG	-55 to +175	°C

Note: 1. Pulse waveform definition per Figure 5 and derated above T_C = 25°C per Figure 1.
 2. Measured on 8.3ms single half sine-wave, duty cycle = 4 pulses per minute maximum.
 3. Measured on a 300μS square pulse width.

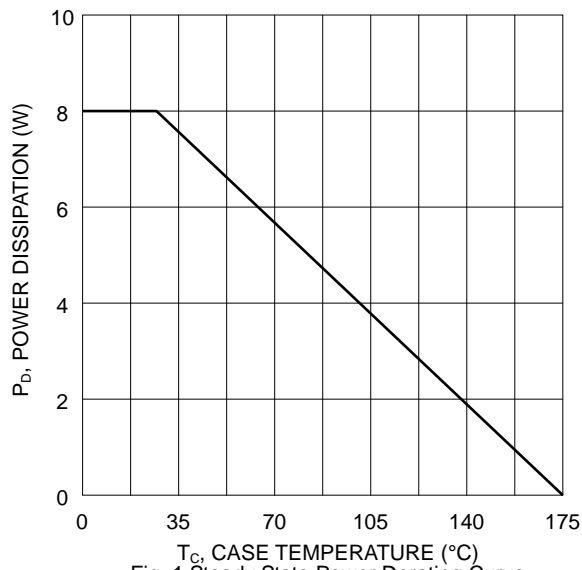


Fig. 1 Steady State Power Derating Curve

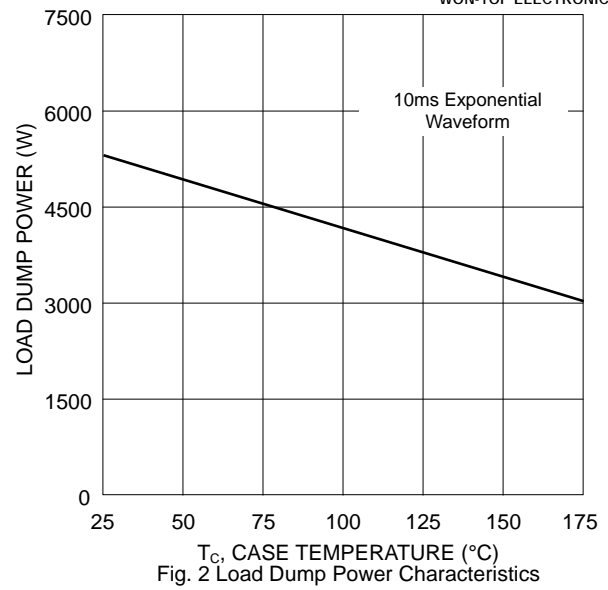


Fig. 2 Load Dump Power Characteristics

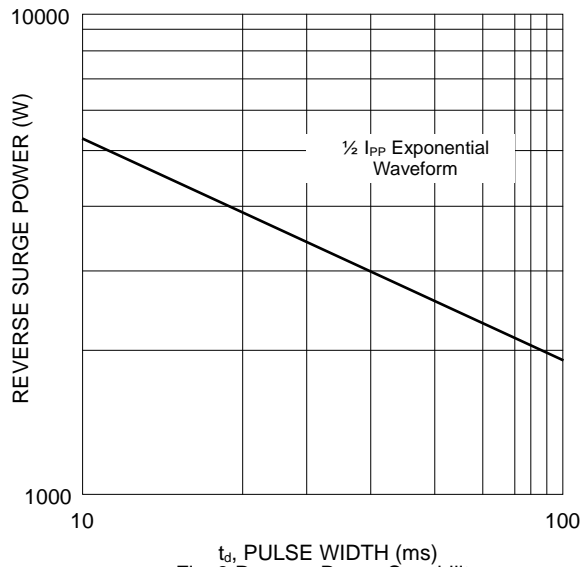


Fig. 3 Reverse Power Capability

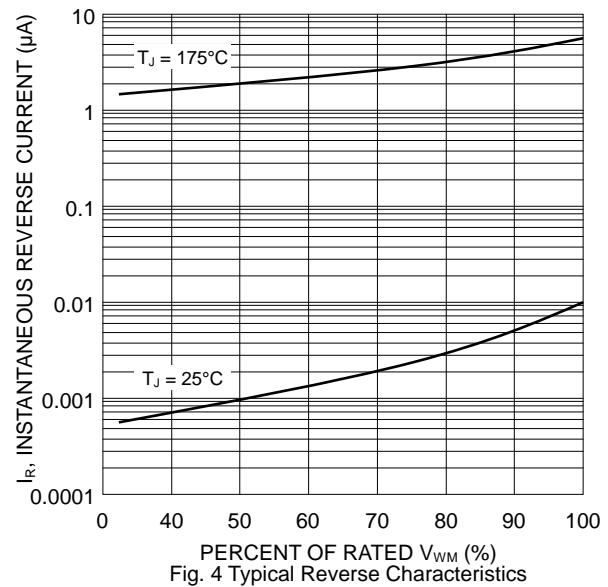


Fig. 4 Typical Reverse Characteristics

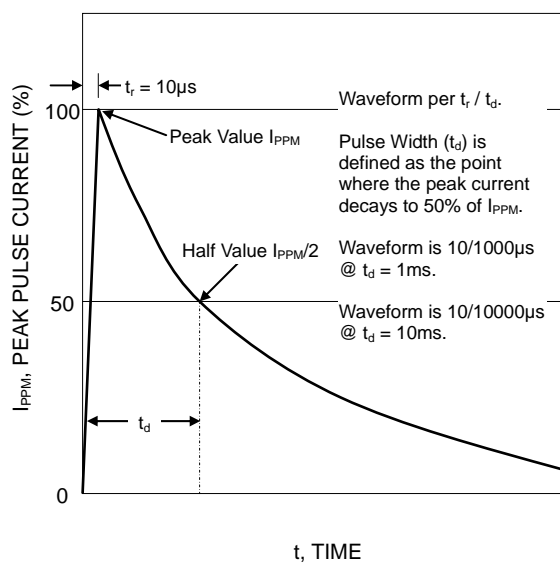


Fig. 5 Pulse Waveform Definition

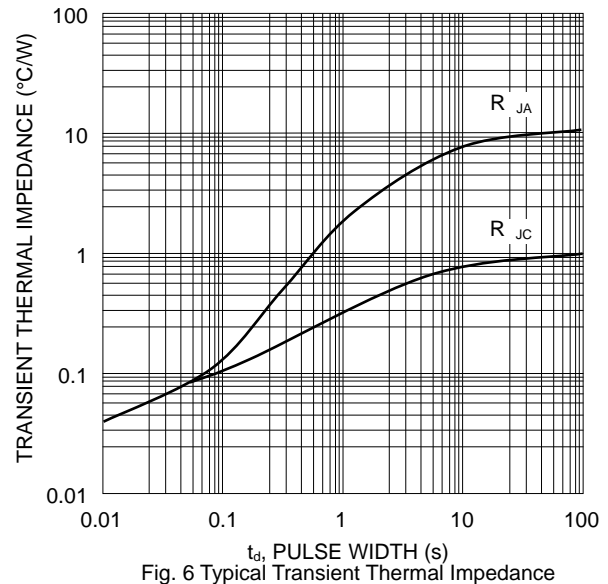



Fig. 6 Typical Transient Thermal Impedance

Electrical Characteristics (@T_A=25°C unless otherwise specified) Table 1

Part Number	Device Marking Code	Breakdown Voltage V _{BR} (V) @ I _T		Test Current I _T (mA)	Reverse Stand-Off Voltage V _{WM} (V)	Max. Reverse Leakage @ V _{WM} T _J = 25°C I _R (μA)	Max. Reverse Leakage @ V _{WM} T _J = 175°C I _R (μA)	Peak Pulse Current ⁽¹⁾ I _{PPM} (A)	Max. Clamping Voltage @ I _{PPM} V _C (V)
		Min.	Max.						
SM8A27	M8W27	24	30	10	22	1.0	50	75	40


Note: 1. Measured at 10/10000μS surge pulse waveform.

MARKING INFORMATION




Cathode = Polarity Band
M8W27 = Device Code

RECOMMENDED FOOTPRINT

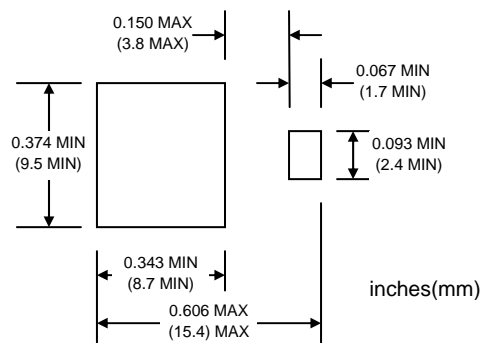

PACKAGING INFORMATION

TAPE & REEL

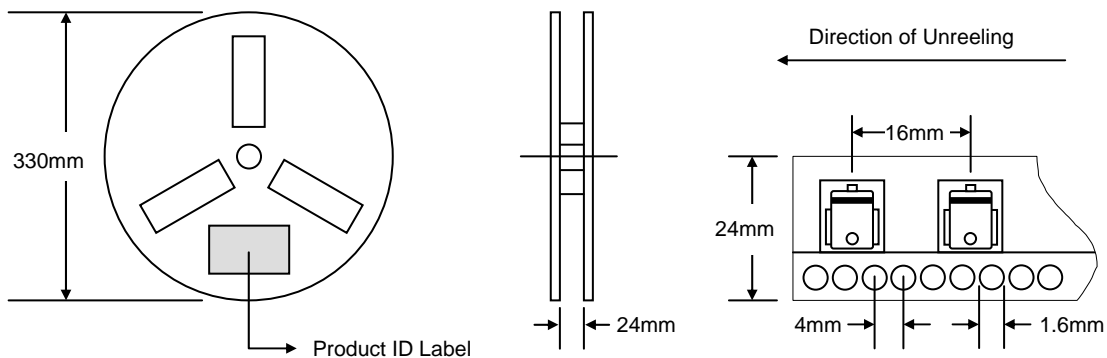


Reel Diameter (mm)	Quantity (PCS)	Inner Box Size L x W x H (mm)	Quantity (PCS)	Carton Size L x W x H (mm)	Quantity (PCS)	Approx. Gross Weight (KG)
330	500	360 x 340 x 52	500	382 x 360 x 470	4,000	18.5

Note: 1. Anti-static plastic reel, blue color.
2. Components are packed in accordance with EIA standard 481-1 and 481-2.

ORDERING INFORMATION

Product No.	Package Type	Shipping Quantity
SM8A27-T3	DO-218	500/Tape & Reel

1. Shipping quantity given is for minimum packing quantity only. For minimum order quantity, please consult the Sales Department.
2. **To order Lead Free version (with Lead Free finish), add "-LF" suffix to part number above. For example, SM8A27-T3-LF.**

WON-TOP ELECTRONICS and  are registered trademarks of Won-Top Electronics Co., Ltd (WTE). WTE has checked all information carefully and believes it to be correct and accurate. However, WTE cannot assume any responsibility for inaccuracies. Furthermore, this information does not give the purchaser of semiconductor devices any license under patent rights to manufacturer. WTE reserves the right to change any or all information herein without further notice.

WARNING: DO NOT USE IN LIFE SUPPORT EQUIPMENT. WTE power semiconductor products are not authorized for use as critical components in life support devices or systems without the express written approval.

Won-Top Electronics Co., Ltd.
No. 44 Yu Kang North 3rd Road,
Chine Chen Dist., Kaohsiung 806, Taiwan
Phone: 886-7-822-5408 or 886-7-822-5410
Fax: 886-7-822-5417
Email: sales@wontop.com
Internet: <http://www.wontop.com>

We power your everyday.