

### Resettable Fuse PTC SMD1210 Series

#### Features

RoHS Compliant & Halogen Free

faster tripping, 1210 Dimension, Surface mountable, Solid state

Operation Current: 0.05A~2.0A


Maximum Voltage: 6V~60Vdc

Operating Temperature: -40°C to +85°C

Agency recognition:  RoHS



#### Dimensions(3225mm/ 1210 mils) Unit: mm

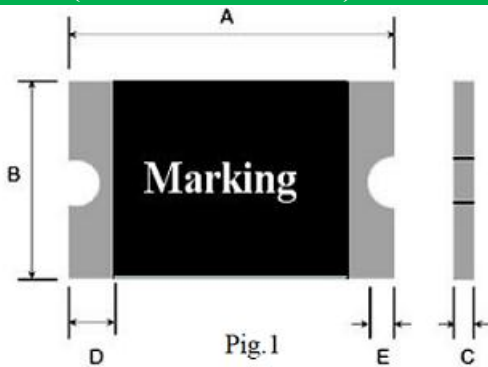

Terminal pad materials : Tin-Plated Nickle-copper  
Terminal pad solderability : Meets EIA specification  
RS 186-9E and ANSI/J-STD-002 Category 3.

Part number	Marking	A		B		C		D	E	Certification		Delivery Time	
		Min	max	Min	Max	Min	Max	Min	Min	UL	TUV	in stock	Produce
JK-SMD1210-005	JN	3.00	3.43	2.35	2.8	0.6	1.25	0.15	0.1	-	-	3days	18days
JK-SMD1210-010	JN	3.00	3.43	2.35	2.8	0.6	1.25	0.15	0.1	-	-	3days	18days
JK-SMD1210-020	JF	3.00	3.43	2.35	2.8	0.5	1.00	0.15	0.1	-	-	3days	18days
JK-SMD1210-035	JB	3.00	3.43	2.35	2.8	0.35	0.90	0.15	0.1	-	-	3days	18days
JK-SMD1210-035-30	JB	3.00	3.43	2.35	2.8	0.35	1.00	0.15	0.1	-	-	3days	18days
JK-SMD1210-050	JG	3.00	3.43	2.35	2.8	0.35	0.90	0.15	0.1	-	-	3days	18days
JK-SMD1210-075	JA	3.00	3.43	2.35	2.8	0.35	0.85	0.15	0.1	-	-	3days	18days
JK-SMD1210-075-24	JA	3.00	3.43	2.35	2.8	0.50	1.10	0.15	0.1	-	-	3days	18days
JK-SMD1210-110	JK	3.00	3.43	2.35	2.8	0.4	1.10	0.15	0.1	-	-	3days	18days
JK-SMD1210-110-12	JK	3.00	3.43	2.35	2.8	0.4	1.40	0.15	0.1	-	-	3days	18days
JK-SMD1210-110-16	JK	3.00	3.43	2.35	2.8	0.4	1.40	0.15	0.1	-	-	3days	18days
JK-SMD1210-150	JK	3.00	3.43	2.35	2.8	0.6	1.40	0.15	0.1	-	-	3days	18days
JK-SMD1210-175	JK	3.00	3.43	2.35	2.8	0.6	1.40	0.15	0.1	-	-	3days	18days
JK-SMD1210-200	JK	3.00	3.43	2.35	2.8	0.6	1.50	0.15	0.1	-	-	3days	18days

Electrical characteristics(25°C)

Part Number	I <sub>Hold</sub>	I <sub>Trip</sub>	V <sub>max</sub>	I <sub>max</sub>	P <sub>d</sub> Max	Maximum Time to Trip		Resistance (Ω)		Certification		Delivery Time	
	A	A	DC	A	W	Current (A)	Time (S)	R <sub>imin</sub>	R <sub>1max</sub>	UL	TUV	in stock	Produce
JK-SMD1210-005	0.05	0.15	60V	100	0.6	0.25	1.50	2.8	50	-	-	3days	18days
JK-SMD1210-010	0.10	0.30	30V	100	0.6	0.50	0.60	0.8	15	-	-	3days	18days
JK-SMD1210-020	0.20	0.40	30V	100	0.6	8.0	0.02	0.40	5	-	-	3days	18days
JK-SMD1210-035	0.35	0.75	16V	100	0.6	8.0	0.20	0.20	1.3	-	-	3days	18days
JK-SMD1210-035-30	0.35	0.75	30V	100	0.6	8.0	0.20	0.20	1.3	-	-	3days	18days
JK-SMD1210-050	0.50	1.00	16V	100	0.6	8.0	0.10	0.18	0.9	-	-	3days	18days
JK-SMD1210-075	0.75	1.50	6V	100	0.6	8.0	0.10	0.07	0.4	-	-	3days	18days
JK-SMD1210-075-24	0.75	1.50	24V	100	0.6	8.0	0.10	0.07	0.45	-	-	3days	18days
JK-SMD1210-110	1.10	2.20	6V	100	0.6	8.0	0.30	0.05	0.21	-	-	3days	18days
JK-SMD1210-110-12	1.10	2.20	12V	100	0.8	8.0	0.30	0.05	0.25	-	-	3days	18days
JK-SMD1210-110-16	1.10	2.20	16V	100	0.8	8.0	0.30	0.05	0.25	-	-	3days	18days
JK-SMD1210-150	1.50	3.00	6V	100	0.8	8.0	0.50	0.03	0.21	-	-	3days	18days
JK-SMD1210-175	1.75	3.50	6V	100	0.8	8.0	0.60	0.02	0.08	-	-	3days	18days
JK-SMD1210-200	2.00	4.00	6V	100	0.8	8.0	1.00	0.015	0.07	-	-	3days	18days

I<sub>hold</sub> = Hold Current. Maximum current device will not trip in 25°C still air.

I<sub>trip</sub> = Trip Current. Minimum current at which the device will always trip in 25°C still air.

V<sub>max</sub> = Maximum operating voltage device can withstand without damage at rated current (I<sub>max</sub>).

I<sub>max</sub> = Maximum fault current device can withstand without damage at rated voltage (V<sub>max</sub>).

P<sub>d</sub>=Maximum power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.

R<sub>imin/max</sub> = Minimum/Maximum device resistance prior to tripping at 25°C.

R<sub>1max</sub> = Maximum device resistance is measured one hour post reflow.

For your download speed,we just uploaded a simple SMD1210 datasheet

If you need our detailed SMD1210 datasheet,Pls email us for a request

Our email is : [sales@huaandz.com](mailto:sales@huaandz.com) or [abc0734@126.com](mailto:abc0734@126.com)