


- **Miniature**
- **General Purpose**
- **Solvent Proof**
- **+85°C  
Maximum  
Temperature**

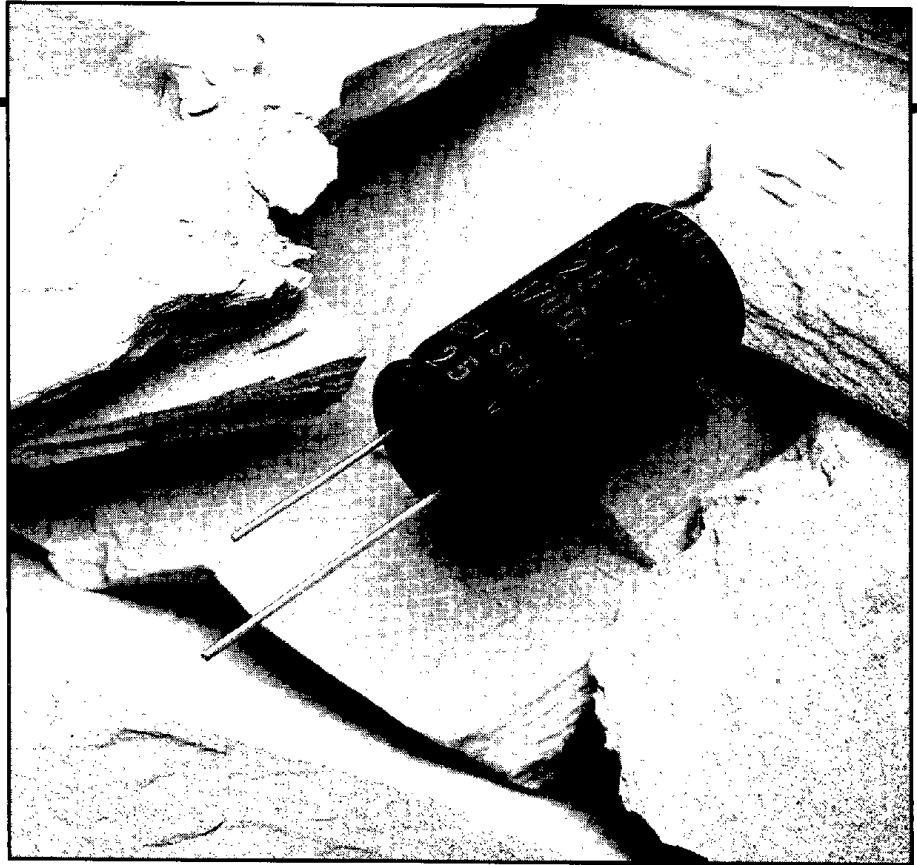

The SME series capacitors are our standard general purpose capacitors. These radial lead capacitors are available in a wide range of voltage and capacitance ratings and are designed for a load life of 2,000 hours at 85°C with an operating temperature range of  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ .

The SME series capacitors, *except for those rated at 350-450 volts*, were developed to withstand HCFC cleaning agents for five minutes by ultrasonic, vapor or immersion. This solvent proof design allows all circuit board components to be cleaned together, at the same time, without resorting to more expensive epoxy end-sealed capacitors. Refer to the Mini-Glossary for recommended cleaning conditions.

## Summary of Specifications

- **Radial lead terminals.**
- **Capacitance range: 0.1 to 15,000 $\mu\text{F}$ .**
- **Voltage range: 6.3 to 450VDC.**
- **Operating temperature range:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  for 6.3 to 400VDC;  $-25^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  for 450VDC.**
- **Leakage current: See specifications table for leakage current values at  $+20^{\circ}\text{C}$ .**
- **Standard capacitance tolerance:  $\pm 20\%$**
- **Nominal case size (D  $\times$  L): 5  $\times$  11mm to 18  $\times$  40mm.**
- **Rated lifetime: 2,000 hours at  $+85^{\circ}\text{C}$ .**

# SME Series

## SME Specifications


| Item  | Characteristics  |  |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
|---|--|--|------------------------------|----------------------------|-------|------------------------|----------------|--|---------|-----------------|--|-------------------|--------------------|----------------|---------------------------------|------------------------------|-----------------|----------------------------------|-----------------------------|----------------|------|-------------------|------|------|------|------|-----------------|------|------|------|------|------|------|---------------------|------|------|------|------|------|------|
| Operating Temperature Range   | -40 to +85°C for 6.3 to 400 VDC; -25 to +85°C for 450 VDC  |  |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Rated Voltage Range   | 6.3 to 450VDC  |  |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Capacitance Range   | 0.1 to 15,000 $\mu$ F  |  |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Capacitance Tolerance   | $\pm$ 20% (M) at +20°C, 120Hz  |  |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Leakage Current   | <p>At +20°C</p> <table border="1"> <thead> <tr> <th>DC Rated Voltage</th> <th>Test Time</th> <th colspan="2">Leakage Current (<math>\mu</math>A)</th> </tr> </thead> <tbody> <tr> <td rowspan="2">6.3-100V</td> <td>After 1 minute</td> <td colspan="2">I = 0.03CV or 4<math>\mu</math>A, whichever is greater.</td> </tr> <tr> <td>After 2 minutes</td> <td colspan="2">I = 0.01CV or 3<math>\mu</math>A, whichever is greater.</td> </tr> <tr> <td rowspan="2">160-450V</td> <td>After 1 minute</td> <td>CV <math>\leq</math> 1,000: I = 0.1CV + 40</td> <td>CV &gt; 1,000: I = 0.04CV + 100</td> </tr> <tr> <td>After 5 minutes</td> <td>CV <math>\leq</math> 1,000: I = 0.03CV + 15</td> <td>CV &gt; 1,000: I = 0.02CV + 25</td> </tr> </tbody> </table> <p>Where I = Leakage current (<math>\mu</math>A), C = Nominal capacitance (<math>\mu</math>F) and V = Rated voltage (V)</p>   | DC Rated Voltage                               | Test Time                    | Leakage Current ( $\mu$ A) |       | 6.3-100V               | After 1 minute | I = 0.03CV or 4 $\mu$ A, whichever is greater. |         | After 2 minutes | I = 0.01CV or 3 $\mu$ A, whichever is greater. |                   | 160-450V           | After 1 minute | CV $\leq$ 1,000: I = 0.1CV + 40 | CV > 1,000: I = 0.04CV + 100 | After 5 minutes | CV $\leq$ 1,000: I = 0.03CV + 15 | CV > 1,000: I = 0.02CV + 25 |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| DC Rated Voltage  | Test Time  | Leakage Current ( $\mu$ A)                     |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| 6.3-100V  | After 1 minute   | I = 0.03CV or 4 $\mu$ A, whichever is greater. |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
|   | After 2 minutes  | I = 0.01CV or 3 $\mu$ A, whichever is greater. |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| 160-450V  | After 1 minute   | CV $\leq$ 1,000: I = 0.1CV + 40                | CV > 1,000: I = 0.04CV + 100 |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
|   | After 5 minutes  | CV $\leq$ 1,000: I = 0.03CV + 15               | CV > 1,000: I = 0.02CV + 25  |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Dissipation Factor (Tan $\delta$ )  | <p>At +20°C, 120Hz</p> <table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160-250</th> <th>350-450</th> </tr> </thead> <tbody> <tr> <td>Tan <math>\delta</math> (DF)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> <td>0.20</td> <td>0.24</td> </tr> </tbody> </table> <p>When nominal capacitance exceeds 1,000<math>\mu</math>F, add 0.02 to the values above for each 1,000<math>\mu</math>F increase.</p>   | Rated Voltage (V)                              | 6.3                          | 10                         | 16    | 25                     | 35             | 50   | 63      | 100             | 160-250  | 350-450           | Tan $\delta$ (DF)  | 0.22           | 0.19                            | 0.16                         | 0.14            | 0.12                             | 0.10                        | 0.09           | 0.08 | 0.20              | 0.24 |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Rated Voltage (V)   | 6.3  | 10   | 16                           | 25                         | 35    | 50                     | 63             | 100  | 160-250 | 350-450         |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Tan $\delta$ (DF)   | 0.22   | 0.19   | 0.16                         | 0.14                       | 0.12  | 0.10                   | 0.09           | 0.08   | 0.20    | 0.24            |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Low Temperature Characteristics   | <p>At 120Hz, impedance (Z) ratio between the -25°C or -40°C value and +20°C value shall not exceed the values given below.</p> <table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50-100</th> <th>160-250</th> <th>350-400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>Z(-25°C)/Z(+20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>6</td> <td>16</td> </tr> <tr> <td>Z(-40°C)/Z(+20°C)</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>4</td> <td>6</td> <td>-</td> </tr> </tbody> </table>  | Rated Voltage (V)                              | 6.3                          | 10                         | 16    | 25                     | 35             | 50-100   | 160-250 | 350-400         | 450  | Z(-25°C)/Z(+20°C) | 4                  | 3              | 2                               | 2                            | 2               | 2                                | 3                           | 6              | 16   | Z(-40°C)/Z(+20°C) | 8    | 6    | 4    | 3    | 3               | 3    | 4    | 6    | -    |      |      |                     |      |      |      |      |      |      |
| Rated Voltage (V)   | 6.3  | 10   | 16                           | 25                         | 35    | 50-100                 | 160-250        | 350-400  | 450     |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Z(-25°C)/Z(+20°C)   | 4  | 3  | 2                            | 2                          | 2     | 2                      | 3              | 6  | 16      |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Z(-40°C)/Z(+20°C)   | 8  | 6  | 4                            | 3                          | 3     | 3                      | 4              | 6  | -       |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Ripple Current Multipliers<br><i>Refer to Section 4 of the Mini-Glossary for explanation of Ripple Current Multipliers.</i> | <p>Ambient Temperature (°C)</p> <table border="1"> <thead> <tr> <th>+70°C</th> <th>+85°C</th> </tr> </thead> <tbody> <tr> <td>1.30</td> <td>1.00</td> </tr> </tbody> </table> <p>Frequency (Hz)</p> <table border="1"> <thead> <tr> <th>Capacitance (<math>\mu</math>F)</th> <th>50Hz</th> <th>120Hz</th> <th>300Hz</th> <th>1kHz</th> <th>10kHz</th> <th>100kHz</th> </tr> </thead> <tbody> <tr> <td><math>\leq</math> 3.3<math>\mu</math>F</td> <td>0.65</td> <td>1.00</td> <td>1.35</td> <td>1.75</td> <td>2.30</td> <td>2.50</td> </tr> <tr> <td>4.7-33<math>\mu</math>F</td> <td>0.75</td> <td>1.00</td> <td>1.25</td> <td>1.50</td> <td>1.75</td> <td>1.80</td> </tr> <tr> <td>47-1000<math>\mu</math>F</td> <td>0.80</td> <td>1.00</td> <td>1.15</td> <td>1.30</td> <td>1.40</td> <td>1.50</td> </tr> <tr> <td><math>\geq</math> 2200<math>\mu</math>F</td> <td>0.85</td> <td>1.00</td> <td>1.03</td> <td>1.05</td> <td>1.08</td> <td>1.08</td> </tr> </tbody> </table> | +70°C  | +85°C                        | 1.30                       | 1.00  | Capacitance ( $\mu$ F) | 50Hz           | 120Hz  | 300Hz   | 1kHz            | 10kHz  | 100kHz            | $\leq$ 3.3 $\mu$ F | 0.65           | 1.00                            | 1.35                         | 1.75            | 2.30                             | 2.50                        | 4.7-33 $\mu$ F | 0.75 | 1.00              | 1.25 | 1.50 | 1.75 | 1.80 | 47-1000 $\mu$ F | 0.80 | 1.00 | 1.15 | 1.30 | 1.40 | 1.50 | $\geq$ 2200 $\mu$ F | 0.85 | 1.00 | 1.03 | 1.05 | 1.08 | 1.08 |
| +70°C   | +85°C  |  |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| 1.30  | 1.00   |  |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Capacitance ( $\mu$ F)  | 50Hz   | 120Hz  | 300Hz                        | 1kHz                       | 10kHz | 100kHz                 |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| $\leq$ 3.3 $\mu$ F  | 0.65   | 1.00   | 1.35                         | 1.75                       | 2.30  | 2.50                   |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| 4.7-33 $\mu$ F  | 0.75   | 1.00   | 1.25                         | 1.50                       | 1.75  | 1.80                   |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| 47-1000 $\mu$ F   | 0.80   | 1.00   | 1.15                         | 1.30                       | 1.40  | 1.50                   |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| $\geq$ 2200 $\mu$ F   | 0.85   | 1.00   | 1.03                         | 1.05                       | 1.08  | 1.08                   |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Load Life   | <p>The following specifications shall be satisfied when the capacitors are restored to +20°C after subjecting them to the DC rated voltage for 2,000 hours at +85°C. The sum of DC voltage and peak AC voltage must not exceed the full rated voltage of the capacitors.</p> <p>Capacitance change: <math>\leq \pm</math>20% of initial measured value<br/>           Tan <math>\delta</math> (DF) : <math>\leq</math> 150% of initial specified value for 6.3-100V &amp; 450V<br/>                             : <math>\leq</math> 200% of initial specified value for 160-400V<br/>           Leakage current : <math>\leq</math> initial specified value</p>  |  |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Shelf Life  | <p>The following specifications shall be satisfied when the capacitors are restored to +20°C after exposing them for 1,000 hours at +85°C without voltage applied. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hours and not more than 48 hours before the measurements.</p> <p>Capacitance change: <math>\leq \pm</math>20% of initial measured value<br/>           Tan <math>\delta</math> (DF) : <math>\leq</math> 150% of initial specified value for 6.3-100V<br/>                             : <math>\leq</math> 200% of initial specified value for 160-450V<br/>           Leakage current : <math>\leq</math> initial specified value for 6.3-100V<br/>                             : <math>\leq</math> 500% of initial specified value for 160-450V</p>  |  |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |
| Others  | Satisfies characteristic W of JIS C5141  |  |                              |                            |       |                        |                |  |         |                 |  |                   |                    |                |                                 |                              |                 |                                  |                             |                |      |                   |      |      |      |      |                 |      |      |      |      |      |      |                     |      |      |      |      |      |      |

# SME Series

## Diagram of Dimensions

### VB/Radial Lead

Unit: mm

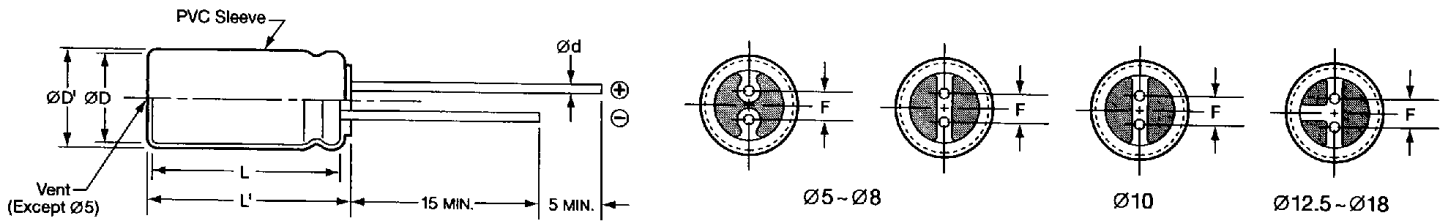

Gas escape end seal for all case diameters.

For optional lead configurations and tape and ammo packaging, refer to the beginning of the Miniature section.

| ØD       | ØD' max. | L' max. | Ød  | F ± 0.5 |
|----------|----------|---------|-----|---------|
| 5        | ØD+0.5   | L+1.0   | 0.5 | 2.0     |
| 6.3      | ØD+0.5   | L+1.0   | 0.5 | 2.5     |
| 8        | ØD+0.5   | L+1.0   | 0.6 | 3.5     |
| 10, 12.5 | ØD+0.5   | L+1.0   | 0.6 | 5.0     |
| 16, 18   | ØD+0.5   | L+1.5   | 0.8 | 7.5     |

## Part Numbering System for SME Series

When ordering, always specify complete catalog number for SME Series.

**SME 25 VB 472 M 18X35 LL**

- Lead Length: LL is Standard.
- Case Code: See Case Sizes in Tables.
- Capacitance Tolerance: M = ± 20%
- Capacitance Value: Expressed in microfarads. The first two digits are significant figures, and the third digit indicates the number of zeros for capacitance of 100µF or more. R indicates the decimal point for capacitance less than 100µF (e.g. R47 = .47µF; 4R7 = 4.7µF; 47R = 47µF; 471 = 470µF; 472 = 4,700µF; 473 = 47,000µF).
- Lead Configuration: VB = Radial Lead.
- DC Rated Voltage: Expressed in Volts (e.g. 25 = 25WVDC).
- Series Name: Indicates Basic Capacitor Design.

## Standard Voltage Ratings - VB/Radial Lead

| Rated Voltage (WVDC)       | Capacitance (µF) | Catalog Part Number | Nominal Case Size* D × L (mm) | Maximum ESR (Ω) at +20°C, 120Hz | Maximum Ripple Current (mA rms) at +85°C, 120Hz |
|----------------------------|------------------|---------------------|-------------------------------|---------------------------------|---|
| 6.3 Volts<br>8 Volts Surge | 33               | SME6.3VB33RM5X11LL  | 5 × 11                        | 11.05                           | 55  |
|                            | 47               | SME6.3VB47RM5X11LL  | 5 × 11                        | 7.759                           | 79  |
|                            | 100              | SME6.3VB101M5X11LL  | 5 × 11                        | 3.647                           | 130   |
|                            | 220              | SME6.3VB221M6X11LL  | 6.3 × 11                      | 1.658                           | 230   |
|                            | 330              | SME6.3VB331M6X11LL  | 6.3 × 11                      | 1.105                           | 280   |
|                            | 470              | SME6.3VB471M8X11LL  | 8 × 11.5                      | 0.776                           | 380   |
|                            | 1,000            | SME6.3VB102M10X12LL | 10 × 12.5                     | 0.365                           | 650   |
|                            | 2,200            | SME6.3VB222M12X20LL | 12.5 × 20                     | 0.181                           | 1,150   |
|                            | 3,300            | SME6.3VB332M12X20LL | 12.5 × 20                     | 0.131                           | 1,380   |
|                            | 4,700            | SME6.3VB472M16X25LL | 16 × 25                       | 0.099                           | 1,880   |
|                            | 6,800            | SME6.3VB682M16X25LL | 16 × 25                       | 0.078                           | 2,120   |
|                            | 10,000           | SME6.3VB103M16X31LL | 16 × 31.5                     | 0.066                           | 2,500   |
|                            | 15,000           | SME6.3VB153M18X35LL | 18 × 35.5                     | 0.055                           | 2,990   |

\*The case sizes in table are with no sleeve, refer to diagram for case sizes with sleeve.

# SME Series

## Standard Voltage Ratings - VB/Radial Lead

| Rated Voltage (WVDC)               | Capacitance (µF)   | Catalog Part Number | Nominal Case Size* D × L (mm) | Maximum ESR (Ω) at +20°C, 120Hz | Maximum Ripple Current (mA rms) at +85°C, 120Hz |
|------------------------------------|--------------------|---------------------|-------------------------------|---------------------------------|---|
| <b>10 Volts<br/>13 Volts Surge</b> | 22                 | SME10VB22RM5X11LL   | 5 × 11                        | 14.315                          | 59  |
|                                    | 33                 | SME10VB33RM5X11LL   | 5 × 11                        | 9.543                           | 84  |
|                                    | 47                 | SME10VB47RM5X11LL   | 5 × 11                        | 6.701                           | 100   |
|                                    | 100                | SME10VB101M5X11LL   | 5 × 11                        | 3.149                           | 145   |
|                                    | 220                | SME10VB221M6X11LL   | 6.3 × 11                      | 1.431                           | 250   |
|                                    | 470                | SME10VB471M8X11LL   | 8 × 11.5                      | 0.67                            | 415   |
|                                    | 1,000              | SME10VB102M10X16LL  | 10 × 16                       | 0.315                           | 790   |
|                                    | 2,200              | SME10VB222M12X20LL  | 12.5 × 20                     | 0.158                           | 1,240   |
|                                    | 3,300              | SME10VB332M12X25LL  | 12.5 × 25                     | 0.116                           | 1,590   |
|                                    | 4,700              | SME10VB472M16X25LL  | 16 × 25                       | 0.088                           | 1,980   |
|                                    | 6,800              | SME10VB682M16X31LL  | 16 × 31.5                     | 0.071                           | 2,390   |
| 10,000                             | SME10VB103M18X35LL | 18 × 35.5           | 0.061                         | 2,840                           |   |
| <b>16 Volts<br/>20 Volts Surge</b> | 10                 | SME16VB10RM5X11LL   | 5 × 11                        | 26.52                           | 44  |
|                                    | 22                 | SME16VB22RM5X11LL   | 5 × 11                        | 12.055                          | 75  |
|                                    | 33                 | SME16VB33RM5X11LL   | 5 × 11                        | 8.036                           | 90  |
|                                    | 47                 | SME16VB47RM5X11LL   | 5 × 11                        | 5.643                           | 110   |
|                                    | 100                | SME16VB101M6X11LL   | 6.3 × 11                      | 2.652                           | 180   |
|                                    | 220                | SME16VB221M8X11LL   | 8 × 11.5                      | 1.205                           | 300   |
|                                    | 330                | SME16VB331M8X11LL   | 8 × 11.5                      | 0.804                           | 370   |
|                                    | 470                | SME16VB471M10X12LL  | 10 × 12.5                     | 0.564                           | 520   |
|                                    | 1,000              | SME16VB102M10X20LL  | 10 × 20                       | 0.265                           | 910   |
|                                    | 2,200              | SME16VB222M12X25LL  | 12.5 × 25                     | 0.136                           | 1,420   |
|                                    | 3,300              | SME16VB332M16X25LL  | 16 × 25                       | 0.10                            | 1,840   |
|                                    | 4,700              | SME16VB472M16X31LL  | 16 × 31.5                     | 0.078                           | 2,260   |
|                                    | 6,800              | SME16VB682M18X35LL  | 18 × 35.5                     | 0.063                           | 2,690   |
| 10,000                             | SME16VB103M18X40LL | 18 × 40             | 0.056                         | 2,920                           |   |
| <b>25 Volts<br/>32 Volts Surge</b> | 4.7                | SME25VB4R7M5X11LL   | 5 × 11                        | 49.372                          | 31  |
|                                    | 10                 | SME25VB10RM5X11LL   | 5 × 11                        | 23.205                          | 54  |
|                                    | 22                 | SME25VB22RM5X11LL   | 5 × 11                        | 10.548                          | 80  |
|                                    | 33                 | SME25VB33RM5X11LL   | 5 × 11                        | 7.032                           | 97  |
|                                    | 47                 | SME25VB47RM5X11LL   | 5 × 11                        | 4.937                           | 115   |
|                                    | 100                | SME25VB101M6X11LL   | 6.3 × 11                      | 2.321                           | 190   |
|                                    | 220                | SME25VB221M8X11LL   | 8 × 11.5                      | 1.055                           | 320   |
|                                    | 330                | SME25VB331M10X12LL  | 10 × 12.5                     | 0.703                           | 470   |
|                                    | 470                | SME25VB471M10X16LL  | 10 × 16                       | 0.494                           | 620   |
|                                    | 1,000              | SME25VB102M12X20LL  | 12.5 × 20                     | 0.232                           | 1,090   |
|                                    | 2,200              | SME25VB222M16X25LL  | 16 × 25                       | 0.121                           | 1,660   |
|                                    | 3,300              | SME25VB332M16X31LL  | 16 × 31.5                     | 0.09                            | 2,070   |
|                                    | 4,700              | SME25VB472M18X35LL  | 18 × 35.5                     | 0.071                           | 2,520   |
| 6,800                              | SME25VB682M18X40LL | 18 × 40             | 0.059                         | 2,830                           |   |
| <b>35 Volts<br/>44 Volts Surge</b> | 4.7                | SME35VB4R7M5X11LL   | 5 × 11                        | 42.319                          | 40  |
|                                    | 10                 | SME35VB10RM5X11LL   | 5 × 11                        | 19.89                           | 58  |
|                                    | 22                 | SME35VB22RM5X11LL   | 5 × 11                        | 9.041                           | 87  |
|                                    | 33                 | SME35VB33RM5X11LL   | 5 × 11                        | 6.027                           | 105   |
|                                    | 47                 | SME35VB47RM6X11LL   | 6.3 × 11                      | 4.232                           | 145   |
|                                    | 100                | SME35VB101M8X11LL   | 8 × 11.5                      | 1.989                           | 240   |
|                                    | 220                | SME35VB221M10X12LL  | 10 × 12.5                     | 0.904                           | 420   |
|                                    | 330                | SME35VB331M10X16LL  | 10 × 16                       | 0.603                           | 570   |
|                                    | 470                | SME35VB471M10X20LL  | 10 × 20                       | 0.423                           | 740   |
|                                    | 1,000              | SME35VB102M12X25LL  | 12.5 × 25                     | 0.199                           | 1,300   |
|                                    | 2,200              | SME35VB222M16X31LL  | 16 × 31.5                     | 0.105                           | 1,890   |
|                                    | 3,300              | SME35VB332M18X35LL  | 18 × 35.5                     | 0.08                            | 2,340   |
|                                    | 4,700              | SME35VB472M18X40LL  | 18 × 40                       | 0.063                           | 2,690   |

\*The case sizes in table are with no sleeve, refer to diagram for case sizes with sleeve.

# SME Series

## Standard Voltage Ratings - VB/Radial Lead

| Rated Voltage (WVDC)                | Capacitance (µF)    | Catalog Part Number | Nominal Case Size* D × L (mm) | Maximum ESR (Ω) at +20°C, 120Hz | Maximum Ripple Current (mA rms) at +85°C, 120Hz |
|-------------------------------------|---------------------|---------------------|-------------------------------|---------------------------------|---|
| <b>50 Volts</b><br>63 Volts Surge   | 0.1                 | SME50VBR10M5X11LL   | 5 × 11                        | 1,657.5                         | 1.3   |
|                                     | 0.22                | SME50VBR22M5X11LL   | 5 × 11                        | 753.409                         | 2.9   |
|                                     | 0.33                | SME50VBR33M5X11LL   | 5 × 11                        | 502.273                         | 4.4   |
|                                     | 0.47                | SME50VBR47M5X11LL   | 5 × 11                        | 352.66                          | 11  |
|                                     | 1.0                 | SME50VB1R0M5X11LL   | 5 × 11                        | 165.75                          | 17  |
|                                     | 2.2                 | SME50VB2R2M5X11LL   | 5 × 11                        | 75.341                          | 29  |
|                                     | 3.3                 | SME50VB3R3M5X11LL   | 5 × 11                        | 50.227                          | 35  |
|                                     | 4.7                 | SME50VB4R7M5X11LL   | 5 × 11                        | 35.266                          | 42  |
|                                     | 10                  | SME50VB10RM5X11LL   | 5 × 11                        | 16.575                          | 65  |
|                                     | 22                  | SME50VB22RM5X11LL   | 5 × 11                        | 7.534                           | 95  |
|                                     | 33                  | SME50VB33RM6X11LL   | 6.3 × 11                      | 5.023                           | 125   |
|                                     | 47                  | SME50VB47RM6X11LL   | 6.3 × 11                      | 3.527                           | 150   |
|                                     | 100                 | SME50VB101M8X11LL   | 8 × 11.5                      | 1.658                           | 255   |
|                                     | 220                 | SME50VB221M10X16LL  | 10 × 16                       | 0.753                           | 490   |
|                                     | 330                 | SME50VB331M10X20LL  | 10 × 20                       | 0.502                           | 650   |
|                                     | 470                 | SME50VB471M12X20LL  | 12.5 × 20                     | 0.353                           | 860   |
| 1,000                               | SME50VB102M16X25LL  | 16 × 25             | 0.166                         | 1,530                           |   |
| 2,200                               | SME50VB222M18X35LL  | 18 × 35.5           | 0.09                          | 2,160                           |   |
| <b>63 Volts</b><br>79 Volts Surge   | 4.7                 | SME63VB4R7M5X11LL   | 5 × 11                        | 31.739                          | 45  |
|                                     | 10                  | SME63VB10RM5X11LL   | 5 × 11                        | 14.918                          | 70  |
|                                     | 22                  | SME63VB22RM6X11LL   | 6.3 × 11                      | 6.781                           | 115   |
|                                     | 33                  | SME63VB33RM6X11LL   | 6.3 × 11                      | 4.52                            | 140   |
|                                     | 47                  | SME63VB47RM8X11LL   | 8 × 11.5                      | 3.174                           | 190   |
|                                     | 100                 | SME63VB101M10X12LL  | 10 × 12.5                     | 1.492                           | 320   |
|                                     | 220                 | SME63VB221M10X20LL  | 10 × 20                       | 0.678                           | 565   |
|                                     | 330                 | SME63VB331M12X20LL  | 12.5 × 20                     | 0.452                           | 765   |
|                                     | 470                 | SME63VB471M12X25LL  | 12.5 × 25                     | 0.317                           | 990   |
|                                     | 1,000               | SME63VB102M16X31LL  | 16 × 31.5                     | 0.149                           | 1,700   |
| <b>100 Volts</b><br>125 Volts Surge | 0.1                 | SME100VBR10M5X11LL  | 5 × 11                        | 1,326.0                         | 2.6   |
|                                     | 0.22                | SME100VBR22M5X11LL  | 5 × 11                        | 602.727                         | 5.8   |
|                                     | 0.33                | SME100VBR33M5X11LL  | 5 × 11                        | 401.818                         | 8.8   |
|                                     | 0.47                | SME100VBR47M5X11LL  | 5 × 11                        | 282.128                         | 12  |
|                                     | 1.0                 | SME100VB1R0M5X11LL  | 5 × 11                        | 132.6                           | 22  |
|                                     | 2.2                 | SME100VB2R2M5X11LL  | 5 × 11                        | 60.273                          | 33  |
|                                     | 3.3                 | SME100VB3R3M5X11LL  | 5 × 11                        | 40.182                          | 40  |
|                                     | 4.7                 | SME100VB4R7M5X11LL  | 5 × 11                        | 28.213                          | 48  |
|                                     | 10                  | SME100VB10RM6X11LL  | 6.3 × 11                      | 13.26                           | 80  |
|                                     | 22                  | SME100VB22RM8X11LL  | 8 × 11.5                      | 6.027                           | 135   |
|                                     | 33                  | SME100VB33RM10X12LL | 10 × 12.5                     | 4.018                           | 195   |
|                                     | 47                  | SME100VB47RM10X16LL | 10 × 16                       | 2.821                           | 255   |
|                                     | 100                 | SME100VB101M12X20LL | 12.5 × 20                     | 1.326                           | 450   |
|                                     | 220                 | SME100VB221M16X25LL | 16 × 25                       | 0.603                           | 810   |
|                                     | 330                 | SME100VB331M16X25LL | 16 × 25                       | 0.402                           | 990   |
|                                     | 470                 | SME100VB471M16X31LL | 16 × 31.5                     | 0.282                           | 1,250   |
| <b>160 Volts</b><br>200 Volts Surge | 0.47                | SME160VBR47M6X11LL  | 6.3 × 11                      | 705.319                         | 12  |
|                                     | 1.0                 | SME160VB1R0M6X11LL  | 6.3 × 11                      | 331.5                           | 17  |
|                                     | 2.2                 | SME160VB2R2M6X11LL  | 6.3 × 11                      | 150.682                         | 26  |
|                                     | 3.3                 | SME160VB3R3M8X11LL  | 8 × 11.5                      | 100.455                         | 36  |
|                                     | 4.7                 | SME160VB4R7M8X11LL  | 8 × 11.5                      | 70.532                          | 44  |
|                                     | 10                  | SME160VB10RM10X16LL | 10 × 16                       | 33.15                           | 83  |
|                                     | 22                  | SME160VB22RM10X20LL | 10 × 20                       | 15.068                          | 130   |
|                                     | 33                  | SME160VB33RM12X20LL | 12.5 × 20                     | 10.045                          | 180   |
|                                     | 47                  | SME160VB47RM12X25LL | 12.5 × 25                     | 7.053                           | 230   |
|                                     | 100                 | SME160VB101M16X25LL | 16 × 25                       | 3.315                           | 380   |
| 220                                 | SME160VB221M18X35LL | 18 × 35.5           | 1.507                         | 640                             |   |

\*The case sizes in table are with no sleeve, refer to diagram for case sizes with sleeve.

# SME Series



## Standard Voltage Ratings - VB/Radial Lead

| Rated Voltage (WVDC)                                     | Capacitance (μF)    | Catalog Part Number | Nominal Case Size* D × L (mm) | Maximum ESR (Ω) at +20°C, 120Hz | Maximum Ripple Current (mA rms) at +85°C, 120Hz |
|--|---------------------|---------------------|-------------------------------|---------------------------------|---|
| <b>200 Volts</b><br>250 Volts Surge                      | 0.47                | SME200VBR47M6X11LL  | 6.3 × 11                      | 705.319                         | 12  |
|  | 1.0                 | SME200VB1R0M6X11LL  | 6.3 × 11                      | 331.5                           | 17  |
|  | 2.2                 | SME200VB2R2M6X11LL  | 6.3 × 11                      | 150.682                         | 26  |
|  | 3.3                 | SME200VB3R3M8X11LL  | 8 × 11.5                      | 100.455                         | 36  |
|  | 4.7                 | SME200VB4R7M10X12LL | 10 × 12.5                     | 70.532                          | 51  |
|  | 10                  | SME200VB10RM10X16LL | 10 × 16                       | 33.15                           | 83  |
|  | 22                  | SME200VB22RM10X20LL | 10 × 20                       | 15.068                          | 130   |
|  | 33                  | SME200VB33RM12X25LL | 12.5 × 25                     | 10.045                          | 190   |
|  | 47                  | SME200VB47RM12X25LL | 12.5 × 25                     | 7.053                           | 230   |
|  | 100                 | SME200VB101M16X31LL | 16 × 31.5                     | 3.315                           | 400   |
| 220  | SME200VB221M18X40LL | 18 × 40             | 1.507                         | 660                             |   |
| <b>250 Volts</b><br>300 Volts Surge                      | 0.47                | SME250VBR47M6X11LL  | 6.3 × 11                      | 705.319                         | 12  |
|  | 1.0                 | SME250VB1R0M6X11LL  | 6.3 × 11                      | 331.5                           | 17  |
|  | 2.2                 | SME250VB2R2M8X11LL  | 8 × 11.5                      | 150.682                         | 30  |
|  | 3.3                 | SME250VB3R3M10X12LL | 10 × 12.5                     | 100.455                         | 43  |
|  | 4.7                 | SME250VB4R7M10X12LL | 10 × 12.5                     | 70.532                          | 51  |
|  | 10                  | SME250VB10RM10X20LL | 10 × 20                       | 33.15                           | 90  |
|  | 22                  | SME250VB22RM12X25LL | 12.5 × 25                     | 15.068                          | 160   |
|  | 33                  | SME250VB33RM12X25LL | 12.5 × 25                     | 10.045                          | 190   |
|  | 47                  | SME250VB47RM16X25LL | 16 × 25                       | 7.053                           | 260   |
|  | 100                 | SME250VB101M18X35LL | 18 × 35.5                     | 3.315                           | 440   |
| <b>350 Volts</b><br>400 Volts Surge<br>Not Solvent Proof | 0.47                | SME350VBR47M8X11LL  | 8 × 11.5                      | 846.383                         | 15  |
|  | 1.0                 | SME350VB1R0M8X11LL  | 8 × 11.5                      | 397.8                           | 22  |
|  | 2.2                 | SME350VB2R2M10X12LL | 10 × 12.5                     | 180.818                         | 39  |
|  | 3.3                 | SME350VB3R3M10X16LL | 10 × 16                       | 120.545                         | 53  |
|  | 4.7                 | SME350VB4R7M10X16LL | 10 × 16                       | 84.638                          | 63  |
|  | 10                  | SME350VB10RM12X20LL | 12.5 × 20                     | 39.78                           | 115   |
|  | 22                  | SME350VB22RM12X25LL | 12.5 × 25                     | 18.082                          | 180   |
|  | 33                  | SME350VB33RM16X25LL | 16 × 25                       | 12.055                          | 245   |
|  | 47                  | SME350VB47RM16X31LL | 16 × 31.5                     | 8.464                           | 315   |
|  | 100                 | SME350VB101M18X40LL | 18 × 40                       | 3.978                           | 500   |
| <b>400 Volts</b><br>450 Volts Surge<br>Not Solvent Proof | 1.0                 | SME400VB1R0M8X11LL  | 8 × 11.5                      | 397.8                           | 22  |
|  | 2.2                 | SME400VB2R2M10X12LL | 10 × 12.5                     | 180.818                         | 39  |
|  | 3.3                 | SME400VB3R3M10X16LL | 10 × 16                       | 120.545                         | 53  |
|  | 4.7                 | SME400VB4R7M10X20LL | 10 × 20                       | 84.638                          | 69  |
|  | 10                  | SME400VB10RM12X20LL | 12.5 × 20                     | 39.78                           | 115   |
|  | 22                  | SME400VB22RM16X25LL | 16 × 25                       | 18.082                          | 200   |
|  | 33                  | SME400VB33RM16X31LL | 16 × 31.5                     | 12.055                          | 265   |
|  | 47                  | SME400VB47RM16X35LL | 16 × 35.5                     | 8.464                           | 325   |
| <b>450 Volts</b><br>500 Volts Surge<br>Not Solvent Proof | 1.0                 | SME450VB1R0M10X12LL | 10 × 12.5                     | 397.8                           | 25  |
|  | 2.2                 | SME450VB2R2M10X16LL | 10 × 16                       | 180.818                         | 42  |
|  | 3.3                 | SME450VB3R3M10X20LL | 10 × 20                       | 120.545                         | 56  |
|  | 4.7                 | SME450VB4R7M12X20LL | 12.5 × 20                     | 84.638                          | 75  |
|  | 10                  | SME450VB10RM12X25LL | 12.5 × 25                     | 39.78                           | 120   |
|  | 22                  | SME450VB22RM16X31LL | 16 × 31.5                     | 18.082                          | 210   |
|  | 33                  | SME450VB33RM18X35LL | 18 × 35.5                     | 12.055                          | 275   |


\*The case sizes in table are with no sleeve, refer to diagram for case sizes with sleeve.

# SME Series



## Temperature Characteristics

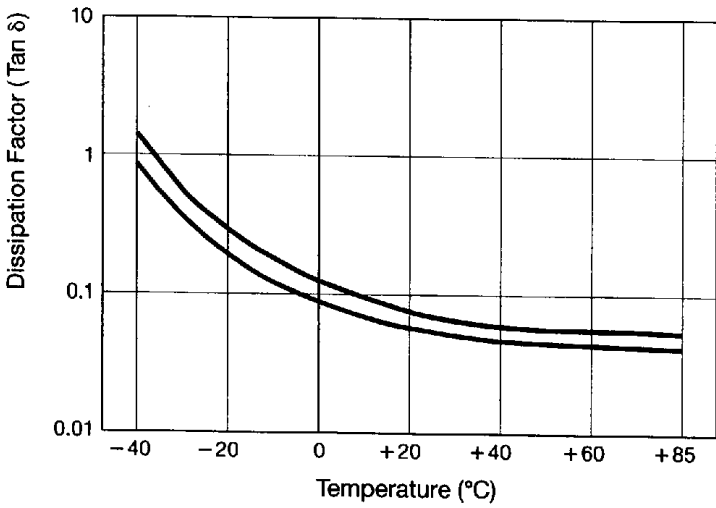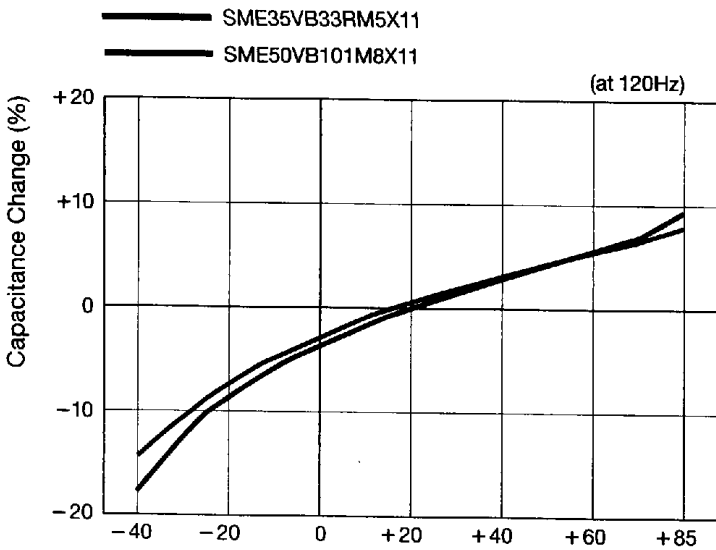

## Impedance - Frequency Characteristics

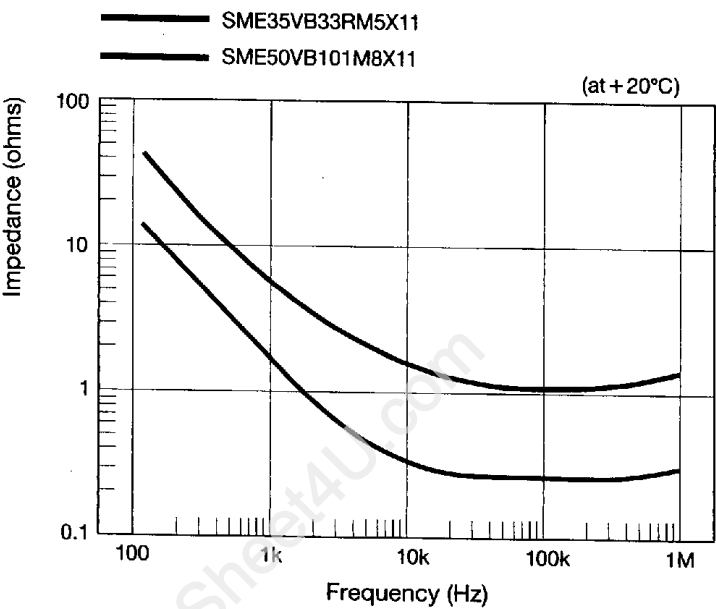

## Temperature Characteristics

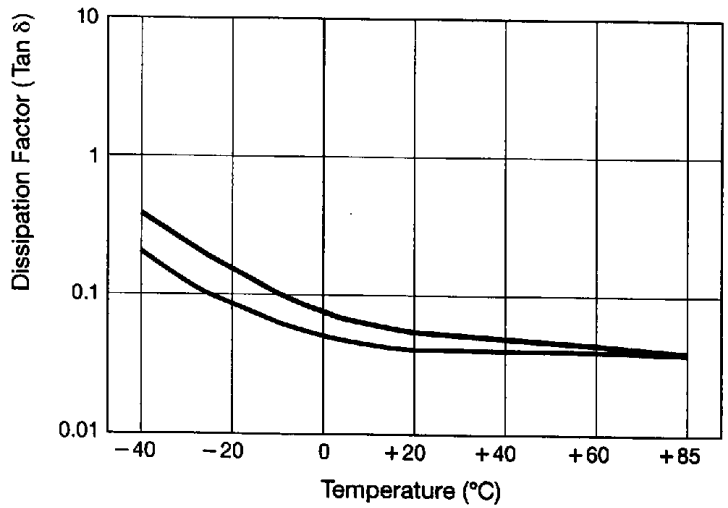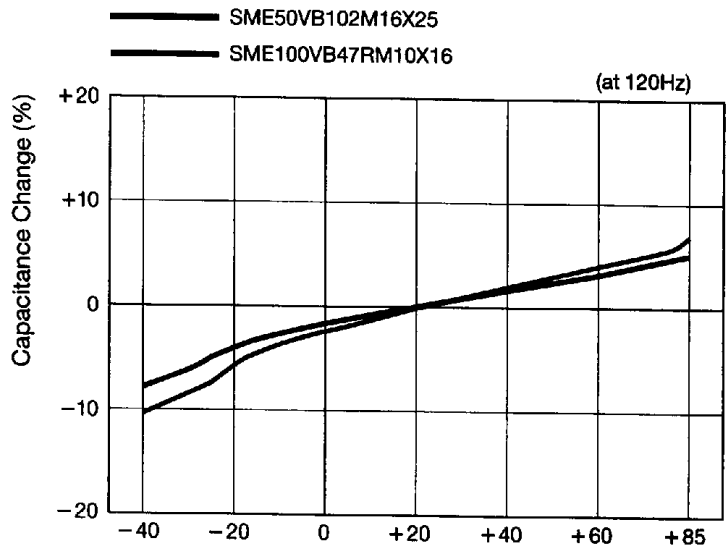

## Impedance - Frequency Characteristics

