



SML-Z1 Series

3528(1411)
3.5×2.8mm (t=1.9mm)

Features

- High brightness
- 20/50mA guaranteed specifications
- PLCC2 package


Color Type	V	U	D	Y	M
	F	P	E	B	WB

Specifications


Part No.	Chip Structure	Emitting Color	Absolute Maximum Ratings (Ta=25°C)						Electrical and Optical Characteristics (Ta=25°C)												
			Power Dissipation Pd(mW)	Forward Current IF(mA)	Peak Forward Current IFP(mA)	Reverse Voltage VR(V)	Operating Temperature Topr(°C)	Storage Temperature Tstg(°C)	Forward Voltage VF		Reverse Current IR		Dominant Wavelength λD			Luminous intensity Iv					
									Typ.(V)	IF(mA)	Max. (μA)	VR(V)	Min. (nm)	Typ. (nm)	Max.*2 (nm)	IF(mA)	Min. (mcd)	Typ. (mcd)	IF(mA)		
SML-Z14VT(A)	AlGaInP on GaAs	Red											625	630	635		56	112			
SML-Z14UT(A)			1.9							615	620	625			112	224					
SML-Z14DT(A)										602	605	608			140	280					
SML-Z14YT(A)			20	10	12	586	589	592	20												
SML-Z14MT(A)			Yellowish Green						2.0					568	571	574		45	90		
SML-Z14FT(A)			Green											561.5	564	566.5		22.4	45		
SML-Z14PT(A)				175	70	-	12	-40 to +100	-40 to +100					557	560	563		11.2	22.4		
SML-Z14V4T															625	630	635		140	280	
SML-Z14U4T			Red							2.0					615	620	625		280	560	
SML-Z14D4T			Orange												602	605	608		355	710	
SML-Z14Y4T			Yellow							50	100	12		587	590	593	50			50	
SML-Z14M4T			Yellowish Green							2.1				569	572	575		112	224		
SML-Z14F4T									562		565	568		71	120						
SML-Z14P4T			Green						558		561	564		22.4	56						
SMLZ13EDT(A)		Bluish Green	120	30		5	-40 to +100	-40 to +100	3.3				519	527	536	20	355	710	20		
SMLZ13BDT(A)		Blue							3.2	20	10	5	464	470	476			140		280	
SMLZ14WBECW(A)	InGaN on SiC		120										(x, y) (0.30, 0.28)				1400	2000			
SMLZ13WBDAW					100*1						100		(x, y) (0.36, 0.36)								
SMLZ13WBDBW		White	115	30		5	-40 to +100	-40 to +100	3.2	20		5	(x, y) (0.44, 0.40)			20	360	700	20		
SMLZ13WBDCW(A)														10	(x, y) (0.30, 0.28)						
SMLZ13WBDDW(A)												100		(x, y) (0.34, 0.34)				900	1400		

* 1: Duty 1/10, 1kHz / * 2: Reference


Dimensions

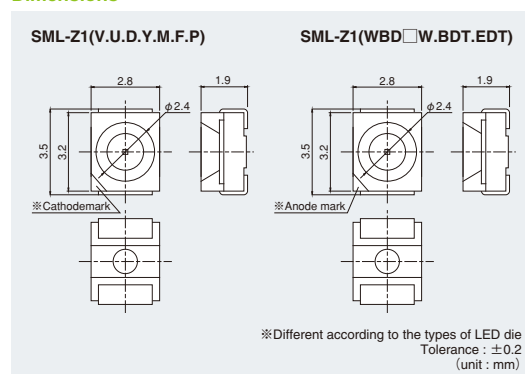

Recommended Solder Pattern

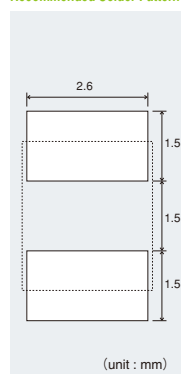


Viewing Angle

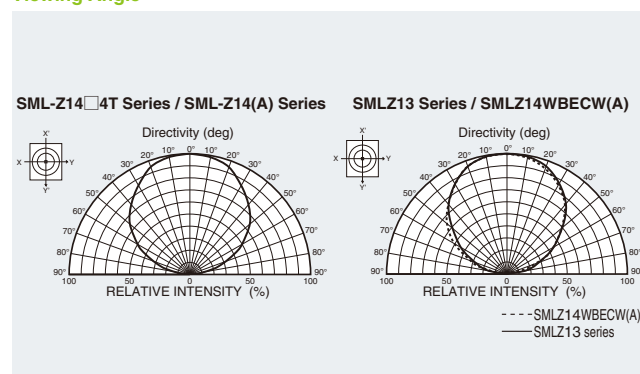


Electrical Characteristics Curves


■ Forward Current-Forward Voltage

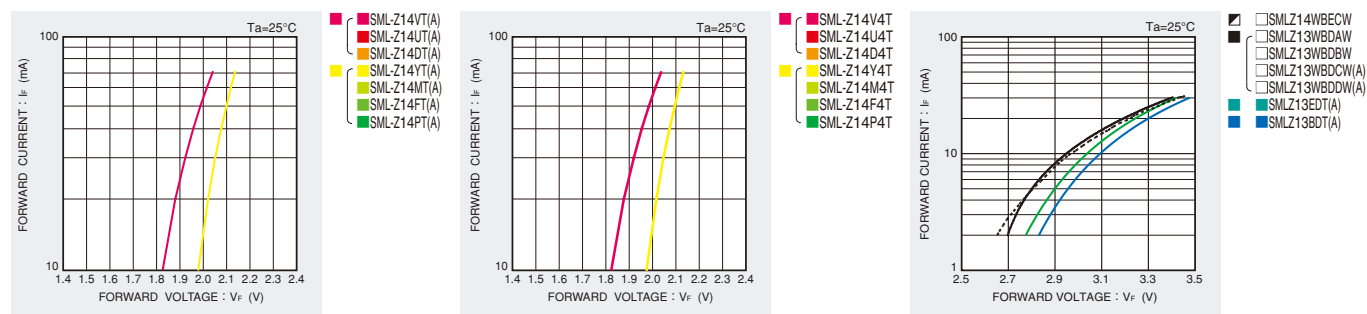


■ Luminous Intensity-Atmosphere Temperature

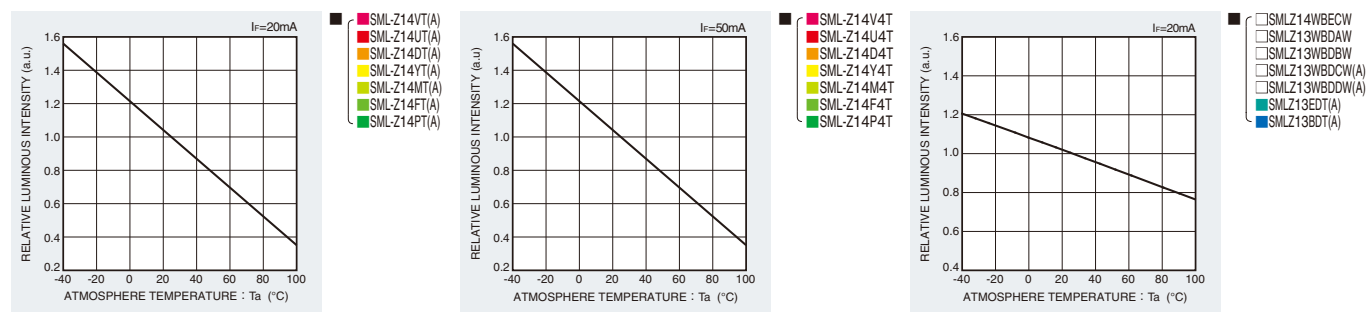

■ Luminous Intensity-Forward Current

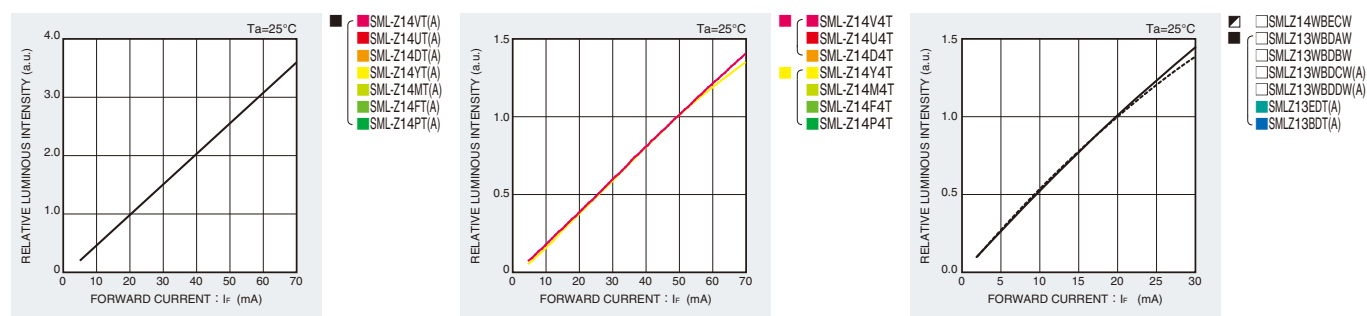

■ Derating

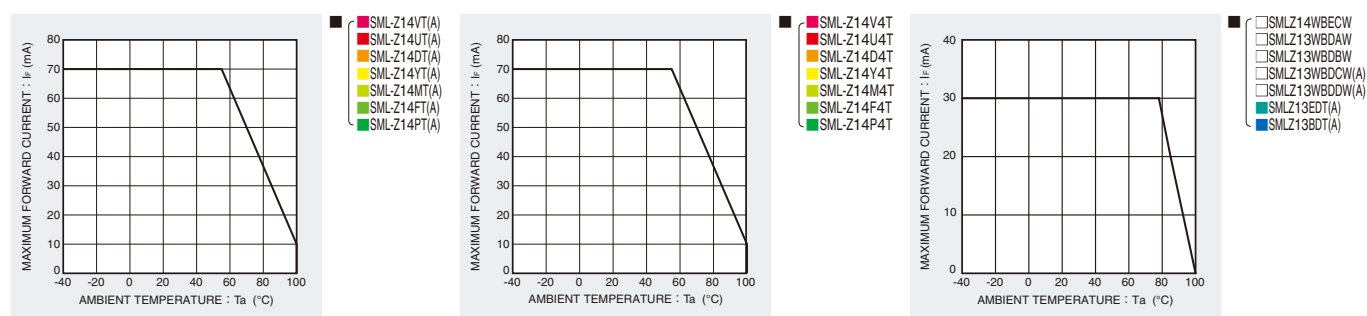

Rank Reference of Brightness

SML-Z14 * T(A) Series

■ Red (V, U)

(Ta=25°C, If=20mA)

	Package size(mm)	Luminous Intensity (mcd)	AH	AJ	AK	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY
		Height(mm)	11.2 to 14	14 to 18	18 to 22.4	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450
PLCC2	3528	1.9																

■ Orange (D)

(Ta=25°C, If=20mA)

	Package size(mm)	Luminous Intensity (mcd)	AH	AJ	AK	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY
		Height(mm)	11.2 to 14	14 to 18	18 to 22.4	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450
PLCC2	3528	1.9																

■ Yellow (Y)

(Ta=25°C, If=20mA)

	Package size(mm)	Luminous Intensity (mcd)	AH	AJ	AK	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY
		Height(mm)	11.2 to 14	14 to 18	18 to 22.4	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450
PLCC2	3528	1.9																

■ Green (M, P, F)

(Ta=25°C, If=20mA)

	Package size(mm)	Luminous Intensity (mcd)	AH	AJ	AK	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY
		Height(mm)	11.2 to 14	14 to 18	18 to 22.4	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450
PLCC2	3528	1.9																

SML-Z14 * 4T Series

■ Red (V, U)

(Ta=25°C, If=50mA)

	Package size(mm)	Luminous Intensity (mcd)	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY	AZ	BA	BB	BC	BD
		Height(mm)	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450	450 to 560	560 to 710	710 to 900	900 to 1120	1120 to 1400
PLCC2	3528	1.9																		

■ Orange (D)

(Ta=25°C, If=50mA)

	Package size(mm)	Luminous Intensity (mcd)	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY	AZ	BA	BB	BC	BD
		Height(mm)	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450	450 to 560	560 to 710	710 to 900	900 to 1120	1120 to 1400
PLCC2	3528	1.9																		

■ Yellow (Y)

(Ta=25°C, If=50mA)

	Package size(mm)	Luminous Intensity (mcd)	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY	AZ	BA	BB	BC	BD
		Height(mm)	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450	450 to 560	560 to 710	710 to 900	900 to 1120	1120 to 1400
PLCC2	3528	1.9																		

■ Green (M, P, F)

(Ta=25°C, If=50mA)

	Package size(mm)	Luminous Intensity (mcd)	AL	AM	AN	AP	AQ	AR	AS	AT	AU	AV	AW	AX	AY	AZ	BA	BB	BC	BD
		Height(mm)	22.4 to 28	28 to 35.5	35.5 to 45	45 to 56	56 to 71	71 to 90	90 to 112	112 to 140	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450	450 to 560	560 to 710	710 to 900	900 to 1120	1120 to 1400
PLCC2	3528	1.9																		

SMLZ13 * T(A) Series

■ Green (E)

(Ta=25°C, If=20mA)

	Package size(mm)	Luminous Intensity (mcd)	AU	AV	AW	AX	AY	AZ	BA	BB	BC	BD	BE
		Height(mm)	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450	450 to 560	560 to 710	710 to 900	900 to 1120	1120 to 1400	1400 to 1800
PLCC2	3528	1.9											

■ Blue (B)

(Ta=25°C, If=20mA)

	Package size(mm)	Luminous Intensity (mcd)	AU	AV	AW	AX	AY	AZ	BA	BB	BC	BD	BE
		Height(mm)	140 to 180	180 to 224	224 to 280	280 to 355	355 to 450	450 to 560	560 to 710	710 to 900	900 to 1120	1120 to 1400	1400 to 1800
PLCC2	3528	1.9											

SMLZ1 * (White Series)


■ White (WB)

(Ta=25°C, If=20mA)

	Package size(mm)	Luminous Intensity (mcd)	V	W	X1	X2	Y1	Y2	Z1
		Height(mm)	360 to 560	560 to 900	900 to 1120	1120 to 1400	1400 to 1800	1800 to 2200	2200 to 2800
PLCC2	3528	1.9							

* Please note that the brightness of some products may fall between ranks (half rank).

Part No. Construction

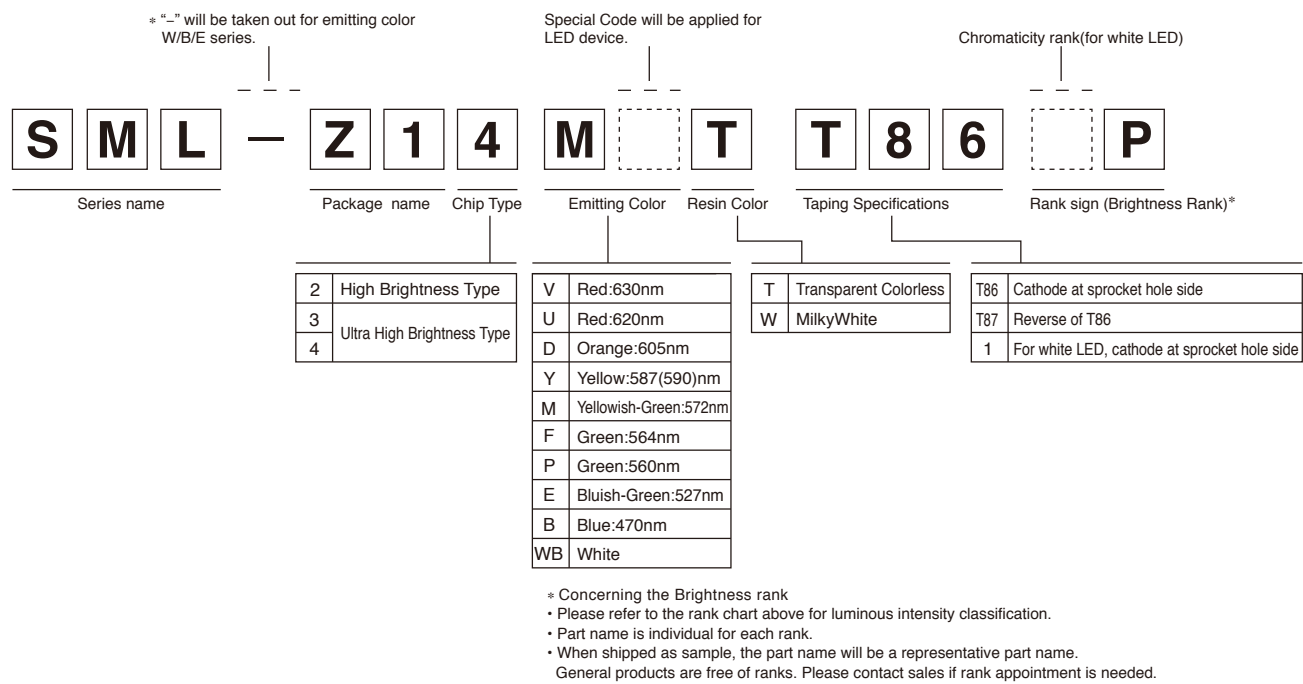

Packing Specification

ROHM LED products are being shipped with desiccant (silica gel) concluded in moisture-proof bags.
Pasting the moisture sensitive label on the outer surface of the moisture-proof bags or enclosing the humidity indication card inside the bag is available upon request.
Please contact the nearest sales office or distributor if necessary.

Notes

No copying or reproduction of this document, in part or in whole, is permitted without the consent of ROHM Co.,Ltd.

The content specified herein is subject to change for improvement without notice.

The content specified herein is for the purpose of introducing ROHM's products (hereinafter "Products"). If you wish to use any such Product, please be sure to refer to the specifications, which can be obtained from ROHM upon request.

Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

Great care was taken in ensuring the accuracy of the information specified in this document. However, should you incur any damage arising from any inaccuracy or misprint of such information, ROHM shall bear no responsibility for such damage.

The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM and other parties. ROHM shall bear no responsibility whatsoever for any dispute arising from the use of such technical information.

The Products specified in this document are intended to be used with general-use electronic equipment or devices (such as audio visual equipment, office-automation equipment, communication devices, electronic appliances and amusement devices).

The Products specified in this document are not designed to be radiation tolerant.

While ROHM always makes efforts to enhance the quality and reliability of its Products, a Product may fail or malfunction for a variety of reasons.

Please be sure to implement in your equipment using the Products safety measures to guard against the possibility of physical injury, fire or any other damage caused in the event of the failure of any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM shall bear no responsibility whatsoever for your use of any Product outside of the prescribed scope or not in accordance with the instruction manual.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). ROHM shall bear no responsibility in any way for use of any of the Products for the above special purposes. If a Product is intended to be used for any such special purpose, please contact a ROHM sales representative before purchasing.

If you intend to export or ship overseas any Product or technology specified herein that may be controlled under the Foreign Exchange and the Foreign Trade Law, you will be required to obtain a license or permit under the Law.



Thank you for your accessing to ROHM product informations.
More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

<http://www.rohm.com/contact/>