

8-Bit Counter

SN54/74LS461A

74LS461A

Features/Benefits

- 8-bit counter for microprogram-counter, DMA-controller and general-purpose counting applications
- 8 bits match byte boundaries
- Bus-structured pinout
- 24-pin SKINNYDIP® saves space
- Three-state outputs drive bus lines
- Low-current PNP Inputs reduce loading
- Expandable in 8-bit increments

Description

The 'LS461A is an 8-bit synchronous counter with parallel load, clear, and hold capability. Two function select inputs (I0, I1) provide one of four operations which occur synchronously on the rising edge of the clock (CK).

The LOAD operation loads the inputs (D7-D0) into the output register (Q7-Q0). The CLEAR operation resets the output register to all LOWs. The HOLD operation holds the previous value regardless of clock transitions. The INCREMENT operation adds one to the output register when the carry-in input is TRUE ($\overline{CI}$ = LOW), otherwise the operation is a HOLD. The carry-out ($\overline{CO}$) is TRUE ($\overline{CO}$ = LOW) when the output register (Q7-Q0) is all HIGHs, otherwise FALSE ($\overline{CO}$ = HIGH).


The data output pins are enabled when $\overline{OE}$ is LOW, and disabled (HI-Z) when $\overline{OE}$ is HIGH. The output drivers will sink the 24 mA required for many bus interface standards.

Two or more 'LS461A 8-bit counters may be cascaded to provide larger counters. The operation codes were chosen such that when I1 is HIGH, I0 may be used to select between LOAD and INCREMENT as in a program counter (JUMP/INCREMENT).

Ordering Information

PART NUMBER	PACKAGE	TEMPERATURE
SN54LS461A	JS, W, 28L	Mil
SN74LS461A	NS, JS	Com

Logic Symbol

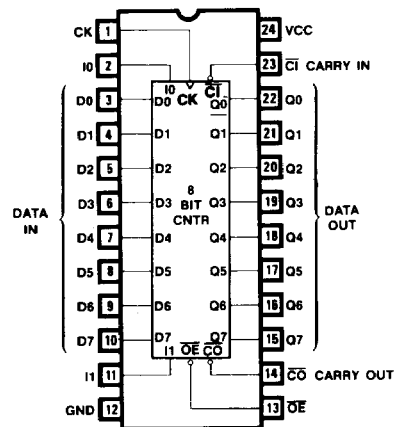

Function Table

$\overline{OE}$	CK	I1	I0	CI	D7-D0	Q7-Q0	OPERATION
H	*	*	*	*	*	Z	HI-Z*
L	↑	L	L	X	X	L	CLEAR
L	↑	L	H	X	X	Q	HOLD
L	↑	H	L	X	D	D	LOAD
L	↑	H	H	H	X	Q	HOLD
L	↑	H	H	L	X	Q plus 1	INCREMENT

* When $\overline{OE}$ is HIGH, the three-state outputs are disabled to the high-impedance states; however, sequential operation of the counter is not affected.

Absolute Maximum Ratings

Supply voltage V_{CC}	7 V
Input voltage	5.5 V
Off-state output voltage	5.5 V
Storage temperature	-65° to +150°C

Operating Conditions

SYMBOL	PARAMETER	MILITARY MIN TYP† MAX	COMMERCIAL MIN TYP† MAX	UNIT
V_{CC}	Supply voltage	4.5 5 5.5	4.75 5 5.25	V
T_A	Operating free-air temperature	-55 125*	0 75	°C
t_w	Width of clock	Low 35 15 High 20 7	25 15 15 7	ns
t_{su}	Setup time	40 20	30 20	ns
t_h	Hold time	0 -15	0 -15	ns

* Case temperature

Electrical Characteristics Over Operating Conditions

SYMBOL	PARAMETER	TEST CONDITIONS	MIN TYP† MAX	UNIT
V_{IL}^{**}	Low-level input voltage		0.8	V
V_{IH}^{**}	High-level input voltage		2	V
V_{IC}	Input clamp voltage	$V_{CC} = \text{MIN}$ $I_I = -18 \text{ mA}$	-0.8 -1.5	V
I_{IL}	Low-level input current	$V_{CC} = \text{MAX}$ $V_I = 0.4 \text{ V}$	-0.02 0.25	mA
I_{IH}	High-level input current	$V_{CC} = \text{MAX}$ $V_I = 2.4 \text{ V}$	25	μA
I_I	Maximum input current	$V_{CC} = \text{MAX}$ $V_I = 5.5 \text{ V}$	1	mA
V_{OL}	Low-level output voltage	$V_{CC} = \text{MIN}$ $V_{IL} = 0.8 \text{ V}$ $V_{IH} = 2 \text{ V}$ Mil $I_{OL} = 12 \text{ mA}$ Com $I_{OL} = 24 \text{ mA}$	0.3 0.5	V
V_{OH}	High-level output voltage	$V_{CC} = \text{MIN}$ $V_{IL} = 0.8 \text{ V}$ $V_{IH} = 2 \text{ V}$ Mil $I_{OH} = -2 \text{ mA}$ Com $I_{OH} = -3.2 \text{ mA}$	2.4 2.8	V
I_{OZL}	Off-state output current	$V_{CC} = \text{MAX}$ $V_{IL} = 0.8 \text{ V}$ $V_{IH} = 2 \text{ V}$ $V_O = 0.4 \text{ V}$	-100	μA
I_{OZH}		$V_O = 2.4 \text{ V}$	100	
I_{OS}	Output short-circuit current*	$V_{CC} = 5.0 \text{ V}$ $V_O = 0 \text{ V}$	-30 -70 -130	mA
I_{CC}	Supply current	$V_{CC} = \text{MAX}$	140 180	mA

* No more than one output should be shorted at a time and duration of the short-circuit should not exceed one second.

** V_{IL} and V_{IH} parameters are, in effect, input conditions of D.C. and functional output † All typical values are at $V_{CC} = 5 \text{ V}$, $T_A = 25^\circ \text{C}$. tests are not directly tested. V_{IL} is specified at $\leq 0.8 \text{ V}$ and V_{IH} is specified at $\geq 2.0 \text{ V}$.


Switching Characteristics Over Operating Conditions

SYMBOL	PARAMETER	TEST CONDITIONS (See Test Load/Waveforms)	MILITARY MIN TYP† MAX	COMMERCIAL MIN TYP† MAX	UNIT
f_{MAX}	Maximum clock frequency*	Commercial	16.6	25	MHz
t_{PD}	CI to CO delay	$R_1 = 200 \Omega$	15 35	15 25	ns
t_{CLK}	Clock to Q	$R_2 = 390 \Omega$	10 25	10 15	ns
t_{PD}	Clock to CO	Military	25 60	25 40	ns
t_{PZX}	Output enable delay	$R_1 = 390 \Omega$	11 25	11 20	ns
t_{PXZ}	Output disable delay	$R_2 = 750 \Omega$	10 25	10 20	ns

* f_{MAX} is derived from: $1/\text{MAX} \{ (t_{su} + t_h) \cdot t_w (\text{Low}) + t_w (\text{High}) \cdot t_{CLK} \}$.

Test Load

* The "Test Point" is driven by the outputs under test, and observed by instrumentation



- Notes: 1. t_{PD} is tested with switch S_1 closed. $C_L = 50 \text{ pF}$ and measured at 1.5 V output level.
2. t_{PZX} is measured at the 1.5 V output level with $C_L = 50 \text{ pF}$. S_1 is open for high impedance to "1" test, and closed for high impedance to "0" test.
3. t_{PXZ} is tested with $C_L = 5 \text{ pF}$. S_1 is open for "1" to high impedance test, measured at $V_{OH} - 0.5 \text{ V}$ output level; S_1 is closed for "0" to high impedance test measured at $V_{OL} + 0.5 \text{ V}$ output level.



ALL HIGH