

## ■ INTRODUCTION

SN65012 is a 12 seconds one-channel single chip voice synthesizer IC which contains a PWM Direct Drive Circuit. There is one 4-bit I/O port and built in a tiny controller. By programming through the tiny controller, user's applications including section combination, trigger modes, output status, and other logic functions can be easily implemented.

## ■ FEATURES

- ◆ Single power supply 2.4V – 5.1V
- ◆ 12 seconds voice capacity is provided
- ◆ Built in a tiny controller
- ◆ One 4-bit I/O port is provided
- ◆ 64\*4 bits RAM are provided
- ◆ Maximum 16k program ROM is provided
- ◆ Readable ROM code data
- ◆ Built in a high quality speech synthesizer
- ◆ Adaptive playing speed from 2.5k-20kHz is provided
- ◆ Built in a PWM Direct Drive circuit output BUO1 and BUO2 directly connected to Speaker for sound output
- ◆ System clock : 1MHz

## ■ PIN ASSIGNMENT

| Symbol          | I/O | Function Description                 |
|-----------------|-----|--------------------------------------|
| P20             | I/O | Bit0 of I/O port 2                   |
| P21             | I/O | Bit1 of I/O port 2                   |
| P22             | I/O | Bit2 of I/O port 2                   |
| P23             | I/O | Bit3 of I/O port 2                   |
| V <sub>DD</sub> | I   | Positive power supply                |
| OSC             | I   | Oscillation component connection pin |
| TEST            | I   | For testing only                     |
| GND             | I   | Negative power supply                |
| BUO1            | O   | PWM output 1                         |
| BUO2            | O   | PWM output 2                         |


**■ ABSOLUTE MAXIMUM RATINGS**

| Items                 | Symbol     | Min     | Max          | Unit. |
|-----------------------|------------|---------|--------------|-------|
| Supply Voltage        | $V_{DD}-V$ | -0.3    | 6.0          | V     |
| Input Voltage         | $V_{IN}$   | GND-0.3 | $V_{DD}+0.3$ | V     |
| Operating Temperature | $T_{OP}$   | -20.0   | 70.0         | °C    |
| Storage Temperature   | $T_{STG}$  | -55.0   | 125.0        | °C    |

**■ ELECTRICAL CHARACTERISTICS**

| Item                  | Sym.      | Min. | Typ. | Max. | Unit    | Condition              |
|-----------------------|-----------|------|------|------|---------|------------------------|
| Operating Voltage     | $V_{DD}$  | 2.4  | 3.0  | 5.1  | V       |                        |
| Standby current       | $I_{SBY}$ | -    | -    | 1.0  | $\mu A$ | $V_{DD}=3V$ , no load  |
| Operating Current     | $I_{OPR}$ | -    | -    | 250  | $\mu A$ | $V_{DD}=3V$ , no load  |
| Input current of P2   | $I_{IH}$  | -    | 3.0  | 10.0 | $\mu A$ | $V_{DD}=3V, V_{IN}=3V$ |
| Drive current of P2   | $I_{OD}$  | 1.5  | 2    | -    | $mA$    | $V_{DD}=3V, V_O=2.4V$  |
| Sink Current of P2    | $I_{OS}$  | 2.0  | 3    | -    | $mA$    | $V_{DD}=3V, V_O=0.4V$  |
| Drive current of Buo1 | $I_{OD}$  | 100  | 120  | -    | $mA$    | $V_{DD}=3V, Buo1=1.5V$ |
| Sink Current of Buo1  | $I_{OS}$  | 100  | 120  | -    | $mA$    | $V_{DD}=3V, Buo1=1.5V$ |
| Drive Current of Buo2 | $I_{OD}$  | 100  | 120  | -    | $mA$    | $V_{DD}=3V, Buo2=1.5V$ |
| Sink Current of Buo2  | $I_{OS}$  | 100  | 120  | -    | $mA$    | $V_{DD}=3V, Buo2=1.5V$ |
| Oscillation Freq.     | $F_{OSC}$ | -    | 1.0  | -    | MHz     | $V_{DD}=3V$            |


■ APPLICATION CIRCUIT

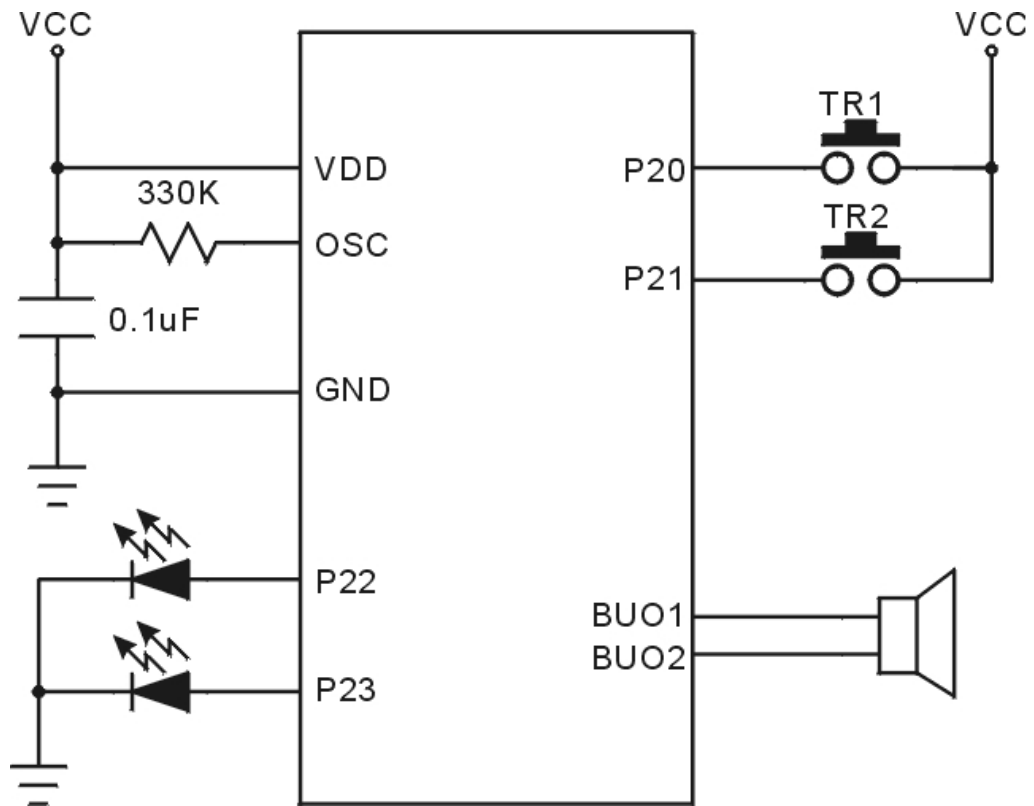

**SN65012**

Note: Please bonds all of  $V_{DD}$  and  $V_{SS}$  pins.

■ **BONDING PAD**

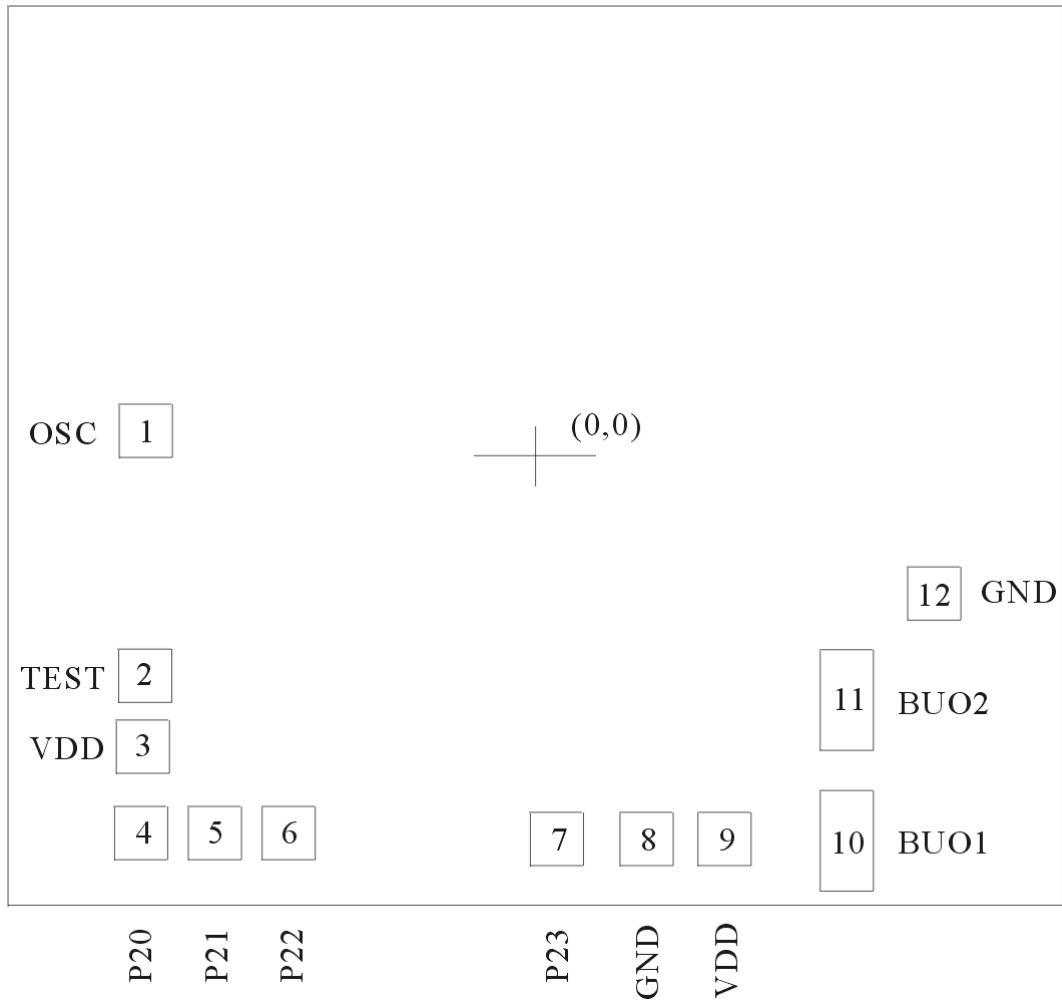

**SN65012**

Note: The substrate MUST be connected to Vss in PCB layout.

**DISCLAIMER**

The information appearing in SONiX web pages (“this publication”) is believed to be accurate.

However, this publication could contain technical inaccuracies or typographical errors.

The reader should not assume that this publication is error-free or that it will be suitable for any particular purpose. SONiX makes no warranty, express, statutory implied or by description in this publication or other documents which are referenced by or linked to this publication. In no event shall SONiX be liable for any special, incidental, indirect or consequential damages of any kind, or any damages whatsoever, including, without limitation, those resulting from loss of use, data or profits, whether or not advised of the possibility of damage, and on any theory of liability, arising out of or in connection with the use or performance of this publication or other documents which are referenced by or linked to this publication. This publication was developed for products offered in Taiwan. SONiX may not offer the products discussed in this document in other countries. Information is subject to change without notice. Please contact SONiX or its local representative for information on offerings available. Integrated circuits sold by SONiX are covered by the warranty and patent indemnification provisions stipulated in the terms of sale only.

The application circuits illustrated in this document are for reference purposes only. SONiX DISCLAIMS ALL WARRANTIES, INCLUDING THE WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE. SONiX reserves the right to halt production or alter the specifications and prices, and discontinue marketing the Products listed at any time without notice. Accordingly, the reader is cautioned to verify that the data sheets and other information in this publication are current before placing orders.

Products described herein are intended for use in normal commercial applications. Applications involving unusual environmental or reliability requirements, e.g. military equipment or medical life support equipment, are specifically not recommended without additional processing by SONiX for such application.