




# SOD1E1 THRU SOD1E8

## SURFACE MOUNT SUPER FAST RECTIFIER

Reverse Voltage - 50 to 600 Volts    Forward Current - 1.0 Ampere

### SOD-123FL

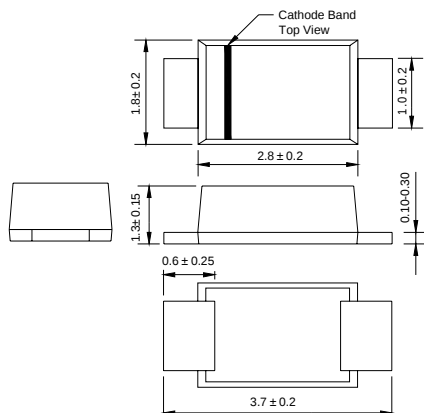

Dimensions in millimeters

### FEATURES

- Glass passivated device
- Ideal for surface mouted applications
- Low reverse leakage
- Metallurgically bonded construction
- High temperature soldering guaranteed:  
260°C/10 seconds,0.375"(9.5mm) lead length,  
5 lbs. (2.3kg) tension

### MECHANICAL DATA

**Case:** JEDEC SOD-123FL molded plastic body over passivated chip

**Terminals:** Plated axial leads, solderable per MIL-STD-750,  
Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:**0.0007 ounce, 0.02 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.

|                                                                                                             | SYMBOLS                          | SOD1E1<br>EA | SOD1E2<br>EB | SOD1E3<br>EC | SOD1E4<br>ED | SOD1E5<br>EE | SOD1E6<br>EG | SOD1E8<br>EJ | UNITS |
|-------------------------------------------------------------------------------------------------------------|----------------------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|-------|
| Maximum repetitive peak reverse voltage                                                                     | V <sub>RRM</sub>                 | 50           | 100          | 150          | 200          | 300          | 400          | 600          | VOLTS |
| Maximum RMS voltage                                                                                         | V <sub>RMS</sub>                 | 35           | 70           | 105          | 140          | 210          | 280          | 420          | VOLTS |
| Maximum DC blocking voltage                                                                                 | V <sub>DC</sub>                  | 50           | 100          | 150          | 200          | 300          | 400          | 600          | VOLTS |
| Maximum average forward rectified current                                                                   | I <sub>(AV)</sub>                | 1.0          |              |              |              |              |              |              | Amp   |
| Peak forward surge current<br>8.3ms single half sine-wave superimposed on<br>rated load (JEDEC Method)      | I <sub>FSM</sub>                 | 25.0         |              |              |              |              |              |              | Amps  |
| Maximum instantaneous forward voltage at1.0A                                                                | V <sub>F</sub>                   | 0.95         |              |              |              | 1.25         |              | 1.7          | Volts |
| Maximum DC reverse current    T <sub>A</sub> =25°C<br>at rated DC blocking voltage    T <sub>A</sub> =100°C | I <sub>R</sub>                   | 5.0<br>100.0 |              |              |              |              |              |              | μA    |
| Maximum reverse recovery time (NOTE 1)                                                                      | t <sub>rr</sub>                  | 35           |              |              |              |              |              |              | ns    |
| Typical junction capacitance (NOTE 2)                                                                       | C <sub>J</sub>                   | 10           |              |              |              |              |              |              | pF    |
| Typical thermal resistance (NOTE 3)                                                                         | R <sub>θJA</sub>                 | 85           |              |              |              |              |              |              | K/W   |
| Operating junction and storage temperature range                                                            | T <sub>J</sub> ,T <sub>STG</sub> | -55 to +150  |              |              |              |              |              |              | °C    |

**Note:** 1.Measured with  $I_F=0.5A$ ,  $I_R=1A$ ,  $I_{rr}=0.25A$ .

2.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3.PCB mounted on 0.2\*0.2" (5.0\*5.0mm) copper pad area.

# RATINGS AND CHARACTERISTIC CURVES SOD1E1 THRU SOD1E8

FIG. 1- FORWARD CURRENT DERATING CURVE

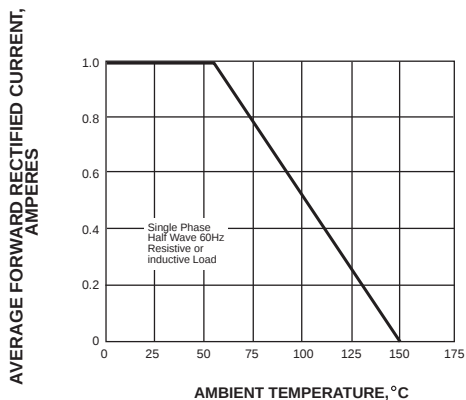


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

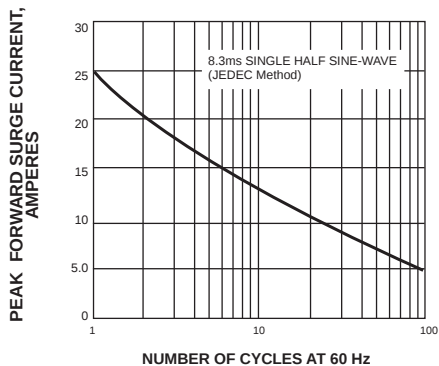


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

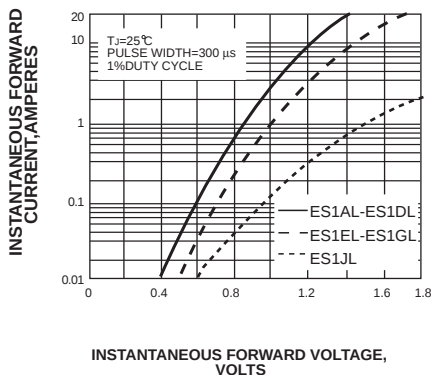


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

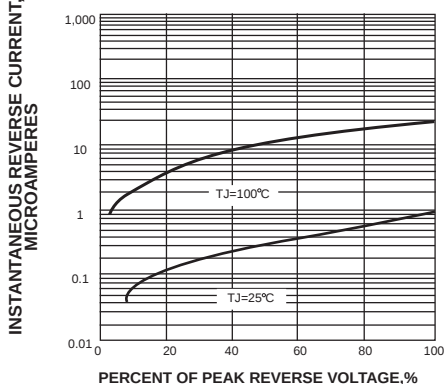


FIG. 5-TYPICAL JUNCTION CAPACITANCE

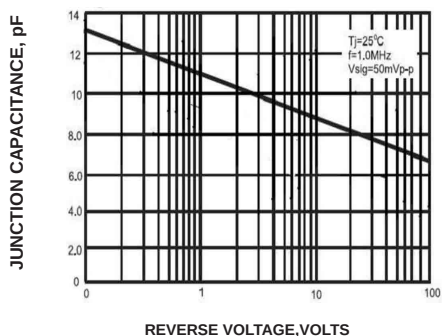


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

