


SP-7850

APPEARANCE

DIMENSIONS (Black/Silver)

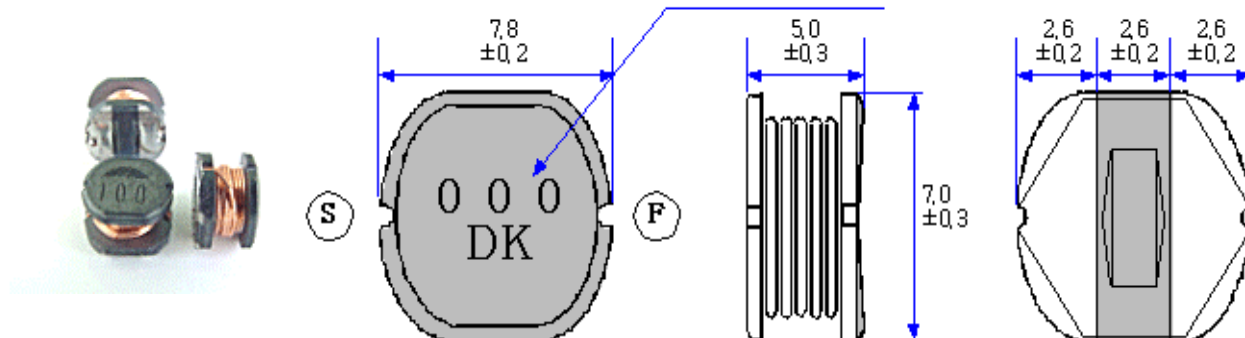

Part No	L (μH)	± (%)	DC Rated Current (A)	DC.R (Ω)	± (%)
SP7850-2R4	2.4	15	2.8	0.035	MAX
SP7850-3R0	3.0	15	2.7	0.035	20
SP7850-4R7	4.7	15	2.6	0.040	20
SP7850-6R8	6.8	15	2.5	0.050	20
SP7850-100	10	15	2.4	0.070	20
SP7850-150	15	15	2.0	0.090	20
SP7850-220	22	15	1.7	0.105	20
SP7850-330	33	15	1.4	0.150	20
SP7850-470	47	15	1.3	0.180	20
SP7850-680	68	15	1.0	0.275	20
SP7850-101	100	15	0.74	0.390	20
SP7850-151	150	15	0.7	0.610	20
SP7850-221	220	15	0.5	1.200	20
SP7850-331	330	15	0.4	1.520	20
SP7850-471	470	15	0.32	2.400	20

Classification

SP7850 - 100

Inductance : $10 \times 10^{-6} = 10 \mu\text{H}$

100 = $10 \mu\text{H}$

4R7 = $4.7 \mu\text{H}$

Size : W × H

SP : Silver Paster