

HITACHI

KAOHSIUNG HITACHI
ELECTRONICS CO.,LTD
P.O. BOX 26-27
2,13TH EAST ST.K.E.P.Z..
KAOHSIUNG TAIWAN R.O.C.
TEL:(07) 8215811 (7LINE)
FAX:(07) 8215815

FOR MESSRS : _____

DATE : May.07,2004

CUSTOMER'S ACCEPTANCE SPECIFICATIONS

SP06Q002-TZA CONTENTS

No	ITEM	SHEET No.	PAGE
1	COVER	7B64PS 2701- SP06Q002-TZA-2	1-1/1
2	RECORD OF REVISION	7B64PS 2702- SP06Q002-TZA-2	2-1/1
3	GENERAL SPECIFICATIONS	7B64PS 2703- SP06Q002-TZA-2	3-1/1
4	ABSOLUTE MAXIMUM RATINGS	7B64PS 2704- SP06Q002-TZA-2	4-1/1
5	ELECTRICAL CHARACTERISTICS	7B64PS 2705- SP06Q002-TZA-2	5-1/2~2/2
6	OPTICAL CHARACTERISTICS	7B64PS 2706- SP06Q002-TZA-2	6-1/2~2/2
7	BLOCK DIAGRAM	7B64PS 2707- SP06Q002-TZA-2	7-1/1
8	INTERFACE TIMING CHART	7B64PS 2708- SP06Q002-TZA-2	8-1/3~3/3
9	OUTLINE DIMENSIONS	7B63PS 2708- SP06Q002-TZA-2 7B64PS 2709- SP06Q002-TZA-2	9-1/2 9-2/2
10	QUALITY STANDARD	7B64PS 2710- SP06Q002-TZA-2	10-1/3~3/3
11	PRECAUTION IN DESIGN	7B64PS 2711- SP06Q002-TZA-2	11-1/3~3/3
12	DESIGNATION OF LOT MARK	7B64PS 2712- SP06Q002-TZA-2	12-1/1
13	PRECAUTION FOR USE	7B64PS 2713- SP06Q002-TZA-2	13-1/1
14	DIGITIZER TECHNICAL SPECIFICATION	7B64PS 2714- SP06Q002-TZA-1	14-1/4~4/4

- * When product will be discontinued, customer will be informed by HITACHI with twelve months prior announcement.
- * This product is inhibited to apply in any life support instrument.

ACCEPTED BY; _____

PROPOSED BY; Jimmy Ho

KAOHSIUNG HITACHI ELECTRONICS CO.,LTD.	Sh. No.	7B64PS 2701- SP06Q002-TZA-2	PAGE	1-1/1
---	------------	-----------------------------	------	-------

RECORD OF REVISION

DATE	SHEET No.	SUMMARY
May.07,'04	7B64PS 2705- SP06Q002-TZA-2 Page 5-1/2	5. ELECTRICAL CHARECTERISTICS 5.1 ELECTRICAL CHARCTERISTICS OF LCD revised : Power Supply Current For Logic TYP : (TBD) → (0.1) Power Supply Current for LC Driving T/P : (TBD) → (2.0)
	7B64PS 2705- SP06Q002-TZA-2 Page 5-2/2	5.5 ELECTRICAL CHARCTERISTICS OF LCD BACKLIGHT revised : Power Supply Current for LED : CONDITION : T.B.D → VLED=5.0V
	7B64PS 2714- SP06Q002-TZA-2 PAGE 14-1/4	Revised: 14. DIGITIZR TECHNICAL SPECIFICATION 14.1 RATINGS 14.1.1 ABSOLUTE MAXIMUM RATINGS Operating Temperature: -5~60℃ → -20~70℃ Storage Temperature: -20~70℃ → -30~80℃ 14.1.2 OPERATING CONDITIONS Actuation Force: 10~50g → 20~100g 14.2 MECHANICAL STRENGTH 14.2.1 INPUT METHOD & ACTUATION FORCE Pen: 10~50g → 20~100g Finger: 10~50g → 20~100g 14.2.2 SURFACE HARDNESS 2H min → 3H min 14.4 ELECTRICAL CHARACTISTICS 14.4.1 CONDUCTIVE RESISTANCE XR-XL: TBD → 130~500Ω YT-YB: TBD → 200~650Ω

3. GENERAL SPECIFICATIONS

(1) Part Name	SP06Q002-TZA
(2) Module Size	67.1 (W)mm x 55.8 (H) mm x4.7 (D)mm
(3) Active Display Area	53.2(W)mm min. x 40.4(H)mm min.
(4) Dot Pitch	0.16 (W)mm x 0.16 (H)mm
(5) Dot Size	0.145 (W)mm x 0.145 (H)mm
(6) Resolution	320 (W) x 240 (H) dots
(7) Duty Ratio	1/242
(8) LCD Type	Transflective type B/W F-STN (Positive Mode)
(9) Viewing Direction	6 O'clock
(10) Backlight	LED(Color : Amber)
(11) Touch Panel	Analog Resistive
	Linearity : 1.5%
	Hardness : 2H
	Transparency : 80%
	Surface Type : Glare

4. ABSOLUTE MAXIMUM RATINGS

4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS.

VSS=0V:STANDARD

ITEM	SYMBOL	MIN.	MAX.	UNIT	COMMENT
Power Supply for Logic	VDD-VSS	-0.3	7.0	V	Note 1
Power Supply for LCD Driving	VCH	-0.3	25	V	Note 1
	VM	-0.3	5	V	
	VSH	-0.3	7.0	V	
Input Voltage	Vi	-0.3	VDD+0.3	V	Note 1,2

Note 1 : All Voltage values are referred to GND=0V

Note 2 : DOFF , FLM , CL1, CL2 , D0~D3 , M.

Note 3 : Make certain you are grounded when handling LCM.

4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS.

I T E M	OPERATING		STORAGE		COMMENT
	MIN.	MAX.	MIN.	MAX.	
Ambient Temperature	-20°C	70°C	-30°C	80°C	Note 2,3,4,7
Humidity	(Note 1)		(Note 1)		Without condensation
Vibration	-	2.45 m/s ²	-	11.76 m/s ² (Note 5)	1 h max . (Note 6)
Shock	-	29.4 m/s ²	-	490 m/s ² (Note 5)	XYZ directions 11ms (Note 6)
Corrosive Gas	Not acceptable		Not acceptable		

Note 1 : Ta ≤ 40°C: 85%RH max.

Ta > 40°C: Absolute humidity must be lower . Than the humidity of 85%RH at 40°C

Note 2 : Ta at -30°C----< 48h , at 80°C----< 168h.

Note 3 : Background color changes slightly depending on ambient temperature .
This phenomenon is reversible.

Note 4 : When this LCM is operated under low temperature, the response time will be slower.

Note 5 : This module should be operated normally after finish the test.

Note 6 : The module do not have mounting hole.
It should be fixed by the way of sandwiching-like method.

Note 7 : Ambient temperature of T/P is mentioned on page 14-1/4 of this document

5. ELECTRICAL CHARACTERISTICS

5.1 ELECTRICAL CHARACTERISTICS OF LCD

VSS=GND

I T E M	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Power Supply Voltage for Logic	VDD-VSS	-	2.5	3.3	4.5	V
Power Supply Voltage for LCD Driving	VCH-VSS	-	-	-	25.0	V
	VSH-VSS	-	2.5	2.8	3.1	
Input Voltage (Note 1)	VI	H level	0.8VDD	-	VDD	V
		L level	0	-	0.2VDD	V
Power Supply Current for Logic	IDD	VDD-VSS=3.3V (Note 2)	-	(0.1)	-	mA
Power Supply Current for LC Driving	ICH	VDD-VSS=3.3V (Note 2)	-	(2.0)	-	mA
Recommended LC Driving Voltage (Note 3,5)	VCH-VSS	Ta= 0°C $\phi=0^\circ$	-	(19.1)	-	V
		Ta=25°C , $\phi=0^\circ$	-	(18.3)	-	V
		Ta=50°C , $\phi=0^\circ$	-	(14.45)	-	V
Frame Frequency (Note 4)	FFLM	-	70	75	80	Hz

Note 1 : $\overline{\text{DOFF}}$, FLM , CL1 , CL2, D0~D3.

Note 2 : fFLM=75Hz , Test pattern is all "Q".
VCH-VSS=(18.3)V, Ta=25°C.

Note 3 : Recommended LC driving voltage fluctuate about $\pm 1.0\text{V}$ by each module.
Test pattern is all "Q".

Note 4 : Need to make sure of flickering and rippling of display when setting the frame frequency in your set.



Note 5 : VDD=3.3V VSH=2.8V
VSL=GND
$$VM = \frac{VSH - VSL}{2}$$

5.5 ELECTRICAL CHARACTERISTICS OF LED BACKLIGHT

$T_a=25^{\circ}\text{C}$ (Display off)

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Power Supply Voltage for LED	VLED	-	-	5.0	-	V
Power Supply Current for LED	ILED	$V_{\text{LED}}=5.0\text{V}$	-	60	100	mA

Note 1 The ILED changes depending on ambient temperature.

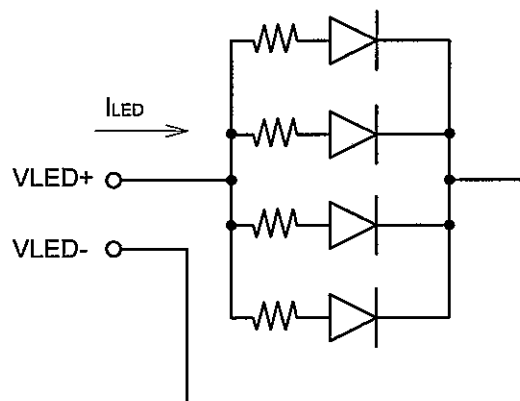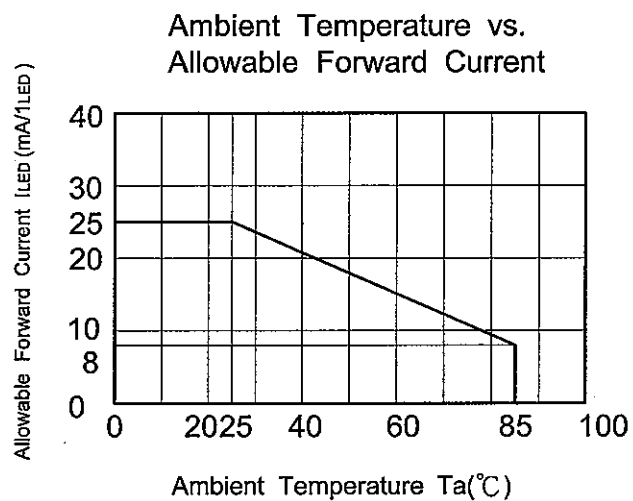


6. OPTICAL CHARACTERISTICS

6.1 OPTICAL CHARACTERISTICS OF LCD


Ta=25°C (Backlight on)

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	NOTE
Viewing Angle	$\phi_2 - \phi_1$	$K \geq 2.0$	-	80	-	deg.	1,2
Contrast Ratio	K	$\phi = 0^\circ, \theta = 0^\circ$	-	(5)	-	-	3
Response Time (Rise)	tr	$\phi = 0^\circ, \theta = 0^\circ$	-	(150)	-	ms	4
Response Time (Fall)	tf	$\phi = 0^\circ, \theta = 0^\circ$	-	(350)	-	ms	4

Note 1 Definition of θ and ϕ
(Normal)

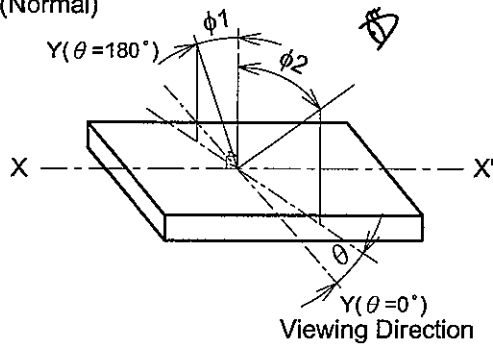


Note 2 Definition of viewing angle ϕ_1 and ϕ_2

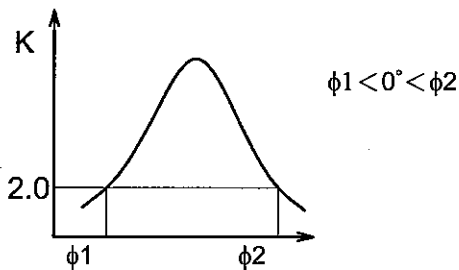

Contrast ratio K vs viewing angle ϕ



Note 4 Definition of optical response

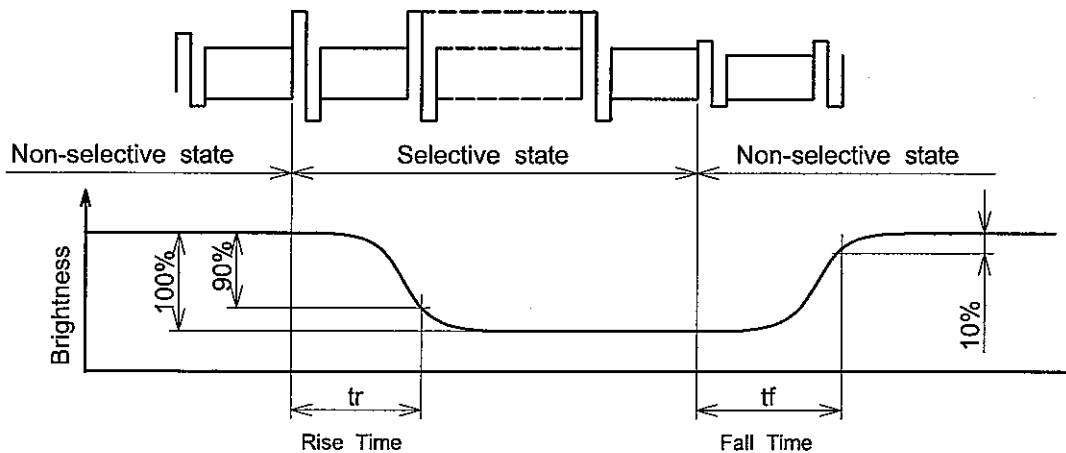

(Measure condition by HITACHI)

Note 3 Definition of contrast "K"

$$K = \frac{\text{Brightness on non-selected dot (B1)}}{\text{Brightness on selected dot (B2)}}$$

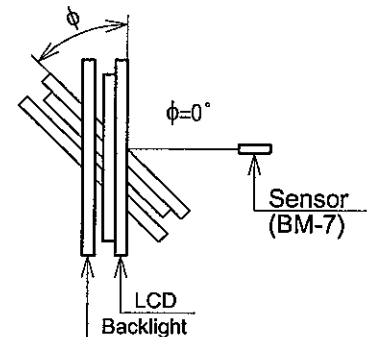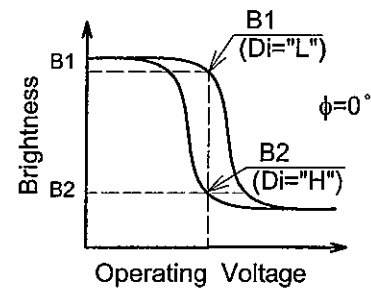


6.2 OPTICAL CHARACTERISTICS OF BACKLIGHT

(LCM, BACKLIGHT ON, Ta=25°C)

ITEM	MIN.	TYP.	MAX.	UNIT	NOTE
Brightness Uniformity	-	-	±30	%	(Note 1,2)
Brightness	(5)	(6.5)	-	cd/m ²	I _{LED} =60 mA


Note 1 : Measure of the following 9 places on the display.

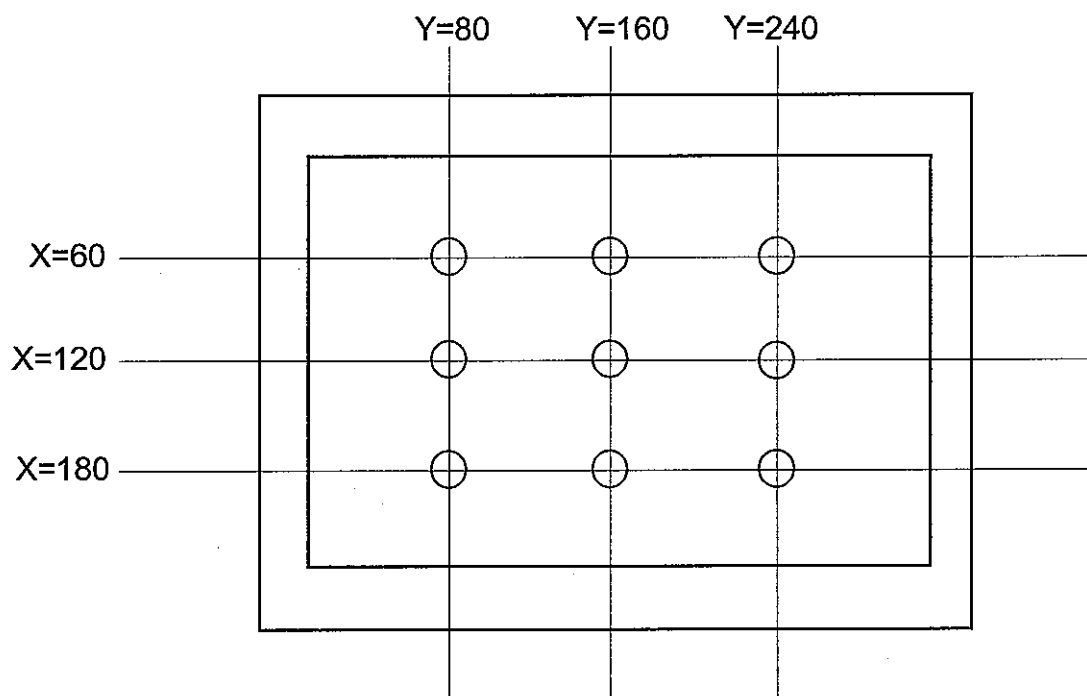

Note 2 : Definition of brightness tolerance.


$$\left(\frac{\text{Max or Min Brightness} - \text{Average Brightness}}{\text{Average Brightness}} \right) \times 100$$

7. BLOCK DIAGRAM

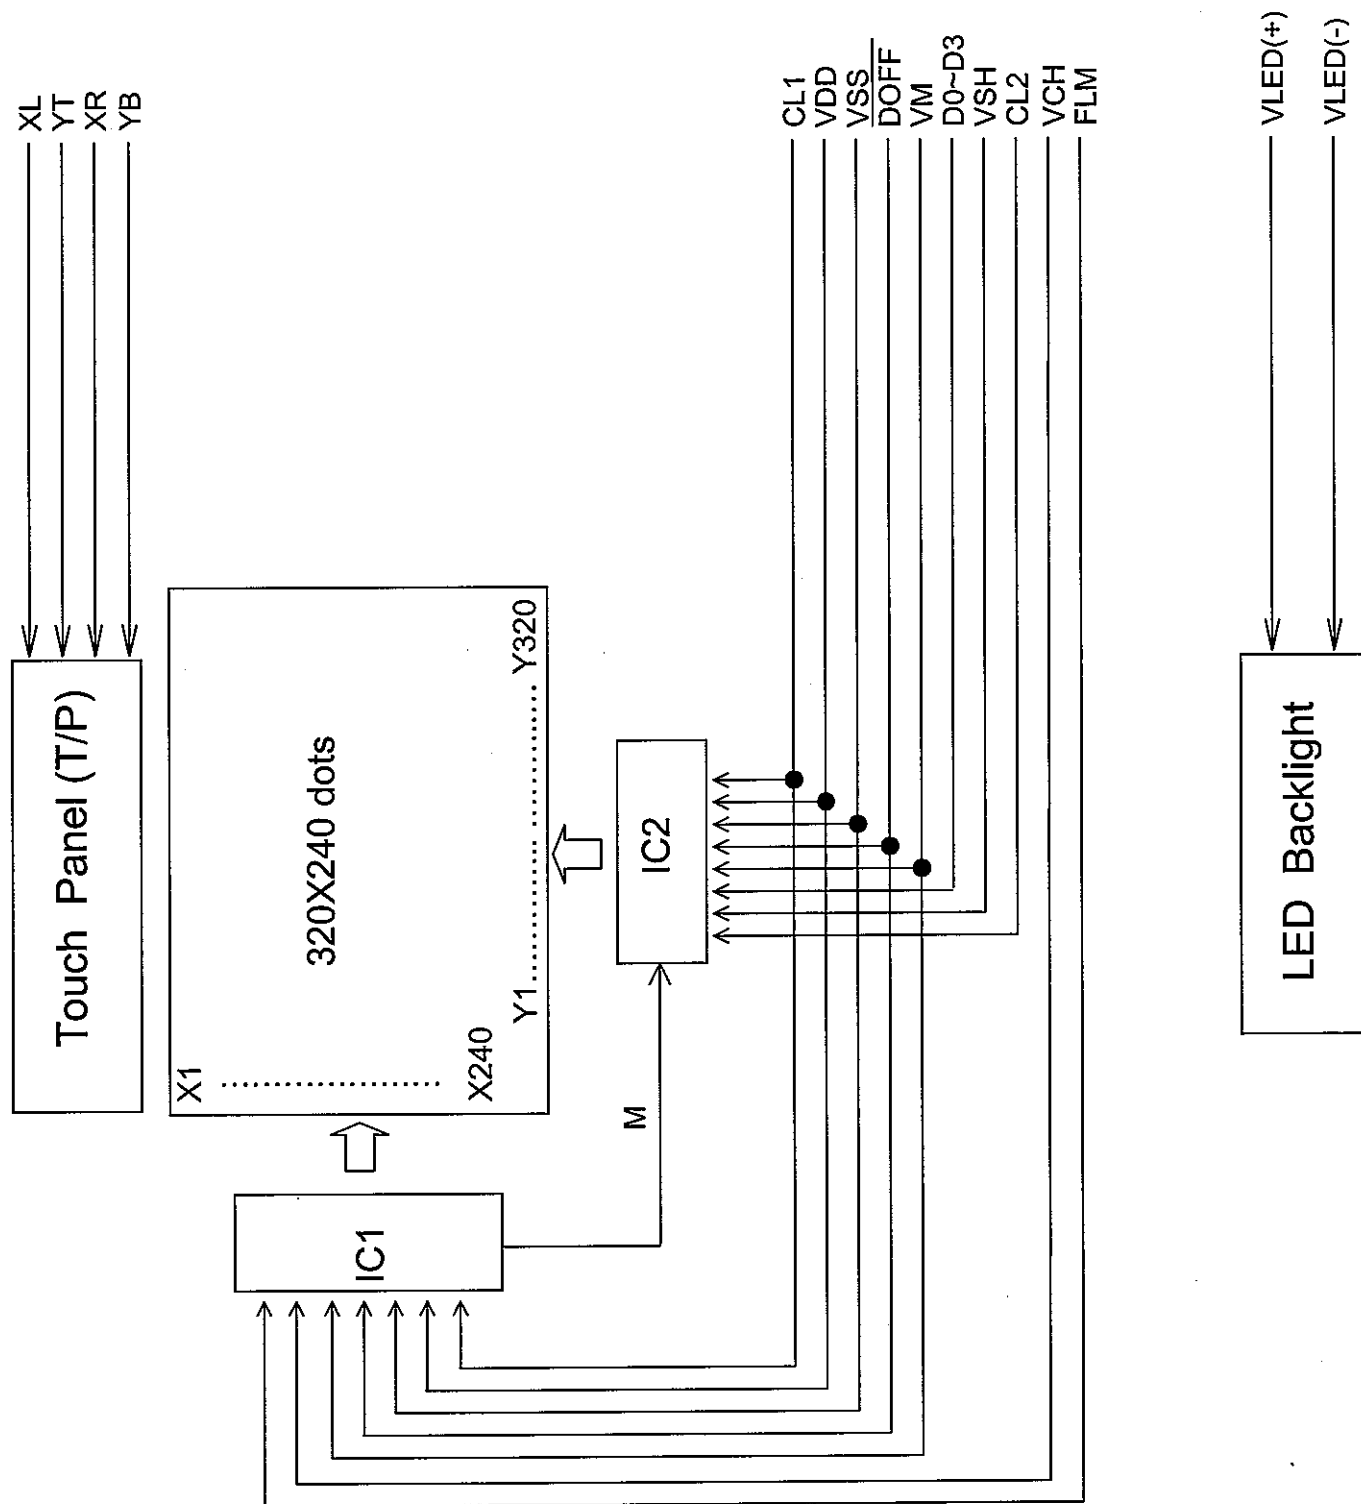


8. INTERFACE TIMING

8.1 TIMING CHART (4-BITS PARALLEL DATA INPUT)

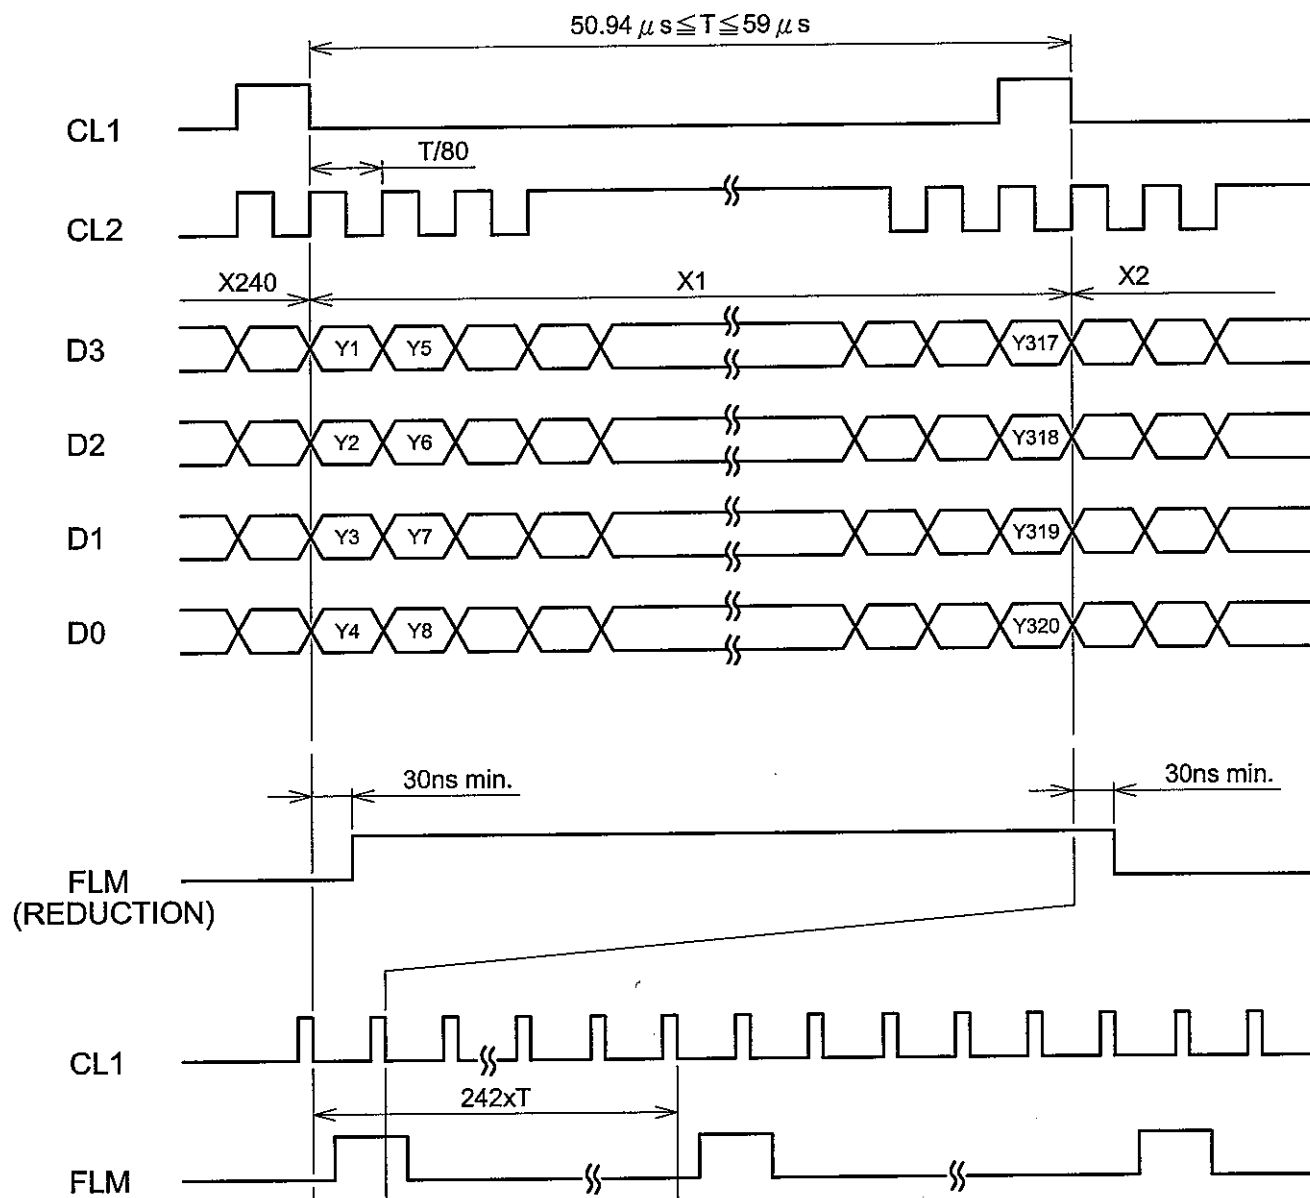


8.2 TIMING CHARACTERISTICS

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITION
Shift Clock Period	tWCK	152	-	-	ns	$t_r, t_f \leq 11\text{ns}$
Shift Clock "H" Pulss Width	tWCKH	65	-	-	ns	
Shift Clock "L" Pulss Width	tWCKL	65	-	-	ns	
Data Setup Time	tDS	50	-	-	ns	
Data Hole Time	tDH	50	-	-	ns	
Latch Pulse "H" Pulse Width	tWLPH	65	-	-	ns	
Clock Setup Time	tSCL	80	-	-	ns	
Clock Hold Time	tHCS	80	-	-	ns	
Input Signal Rise Time	t _r	-	-	30	ns	
Input Signal Fall Time	t _f	-	-	30	ns	
DOFF Removal Time	tSD	100	-	-	ns	
DOFF Enable Pulse Time	tWDL	1.2	-	-	μs	
"FLM" Set Up Time	tFS	100	-	-	ns	-
"FLM" Hold Time	tFH	30	-	-	ns	-

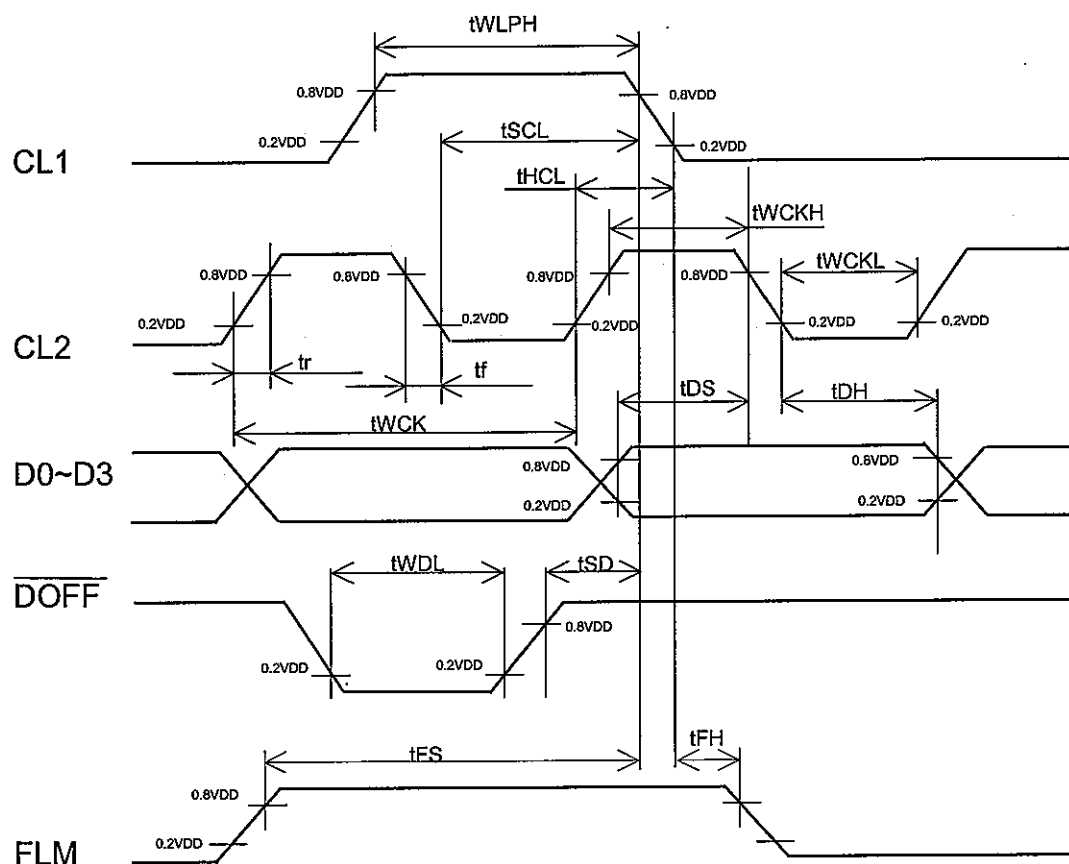


8.3 TIMING OF POWER SUPPLY AND INTERFACE SIGNAL

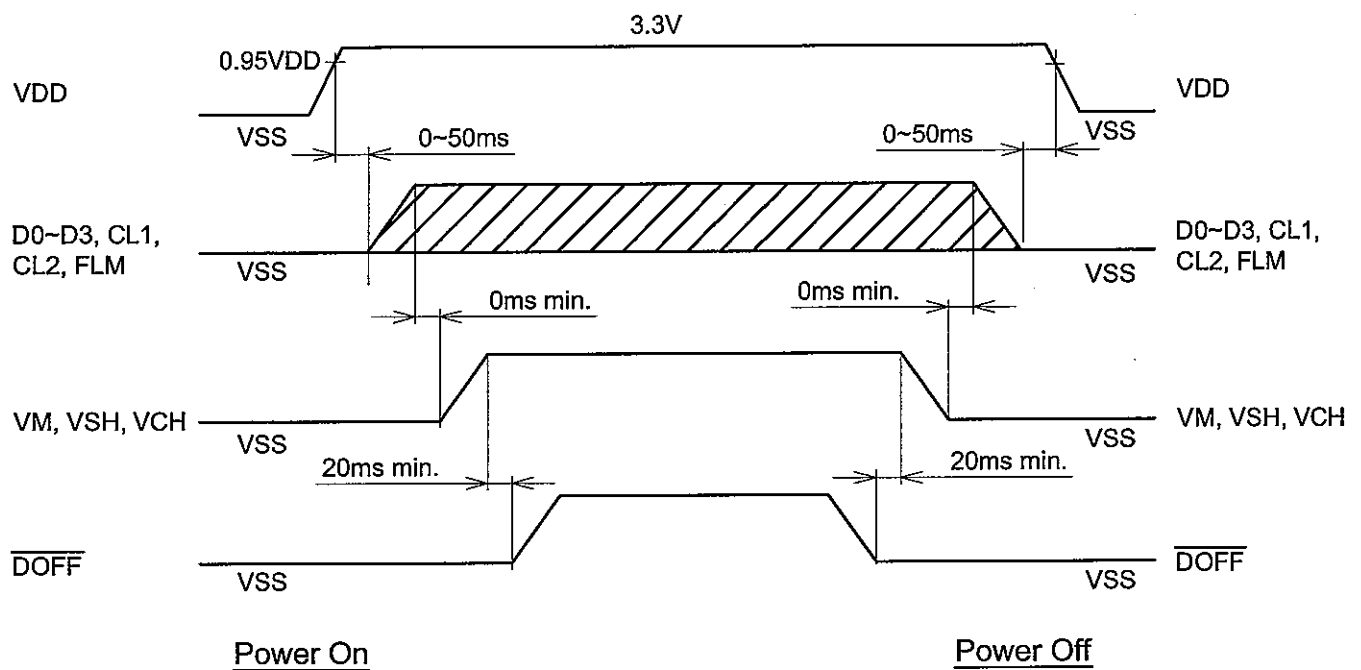

Note 1 $\overline{\text{DOFF}}$ function takes priority even if the input signal status becomes irregular immediately after VDD power-on.


Note 2 Please keep the specified sequence because wrong sequence may cause permanent damage to the LCM.

8.4 POWER SUPPLY FOR LCM

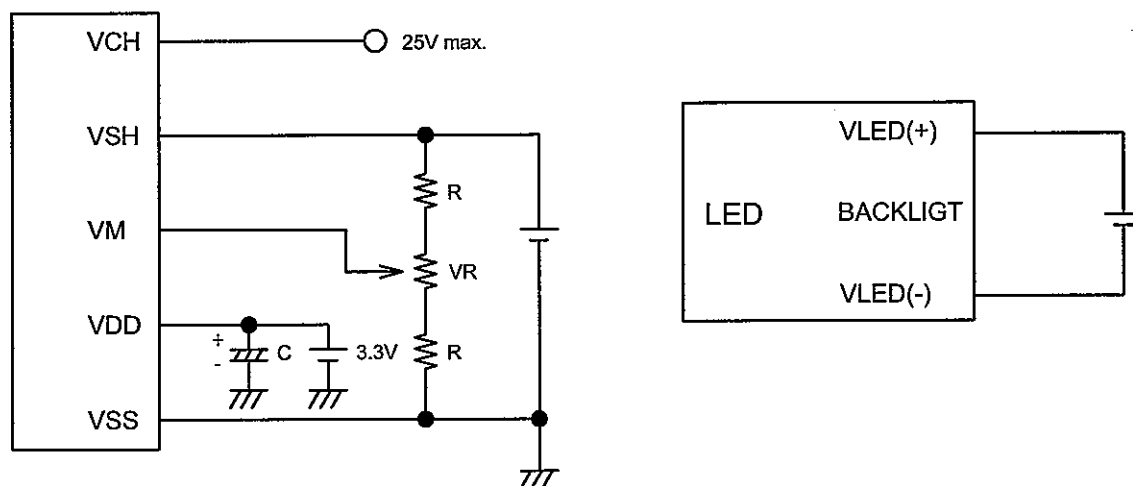


9. OUTLINE DIMENSIONS

9.1 OUTLINE DIMENSIONS

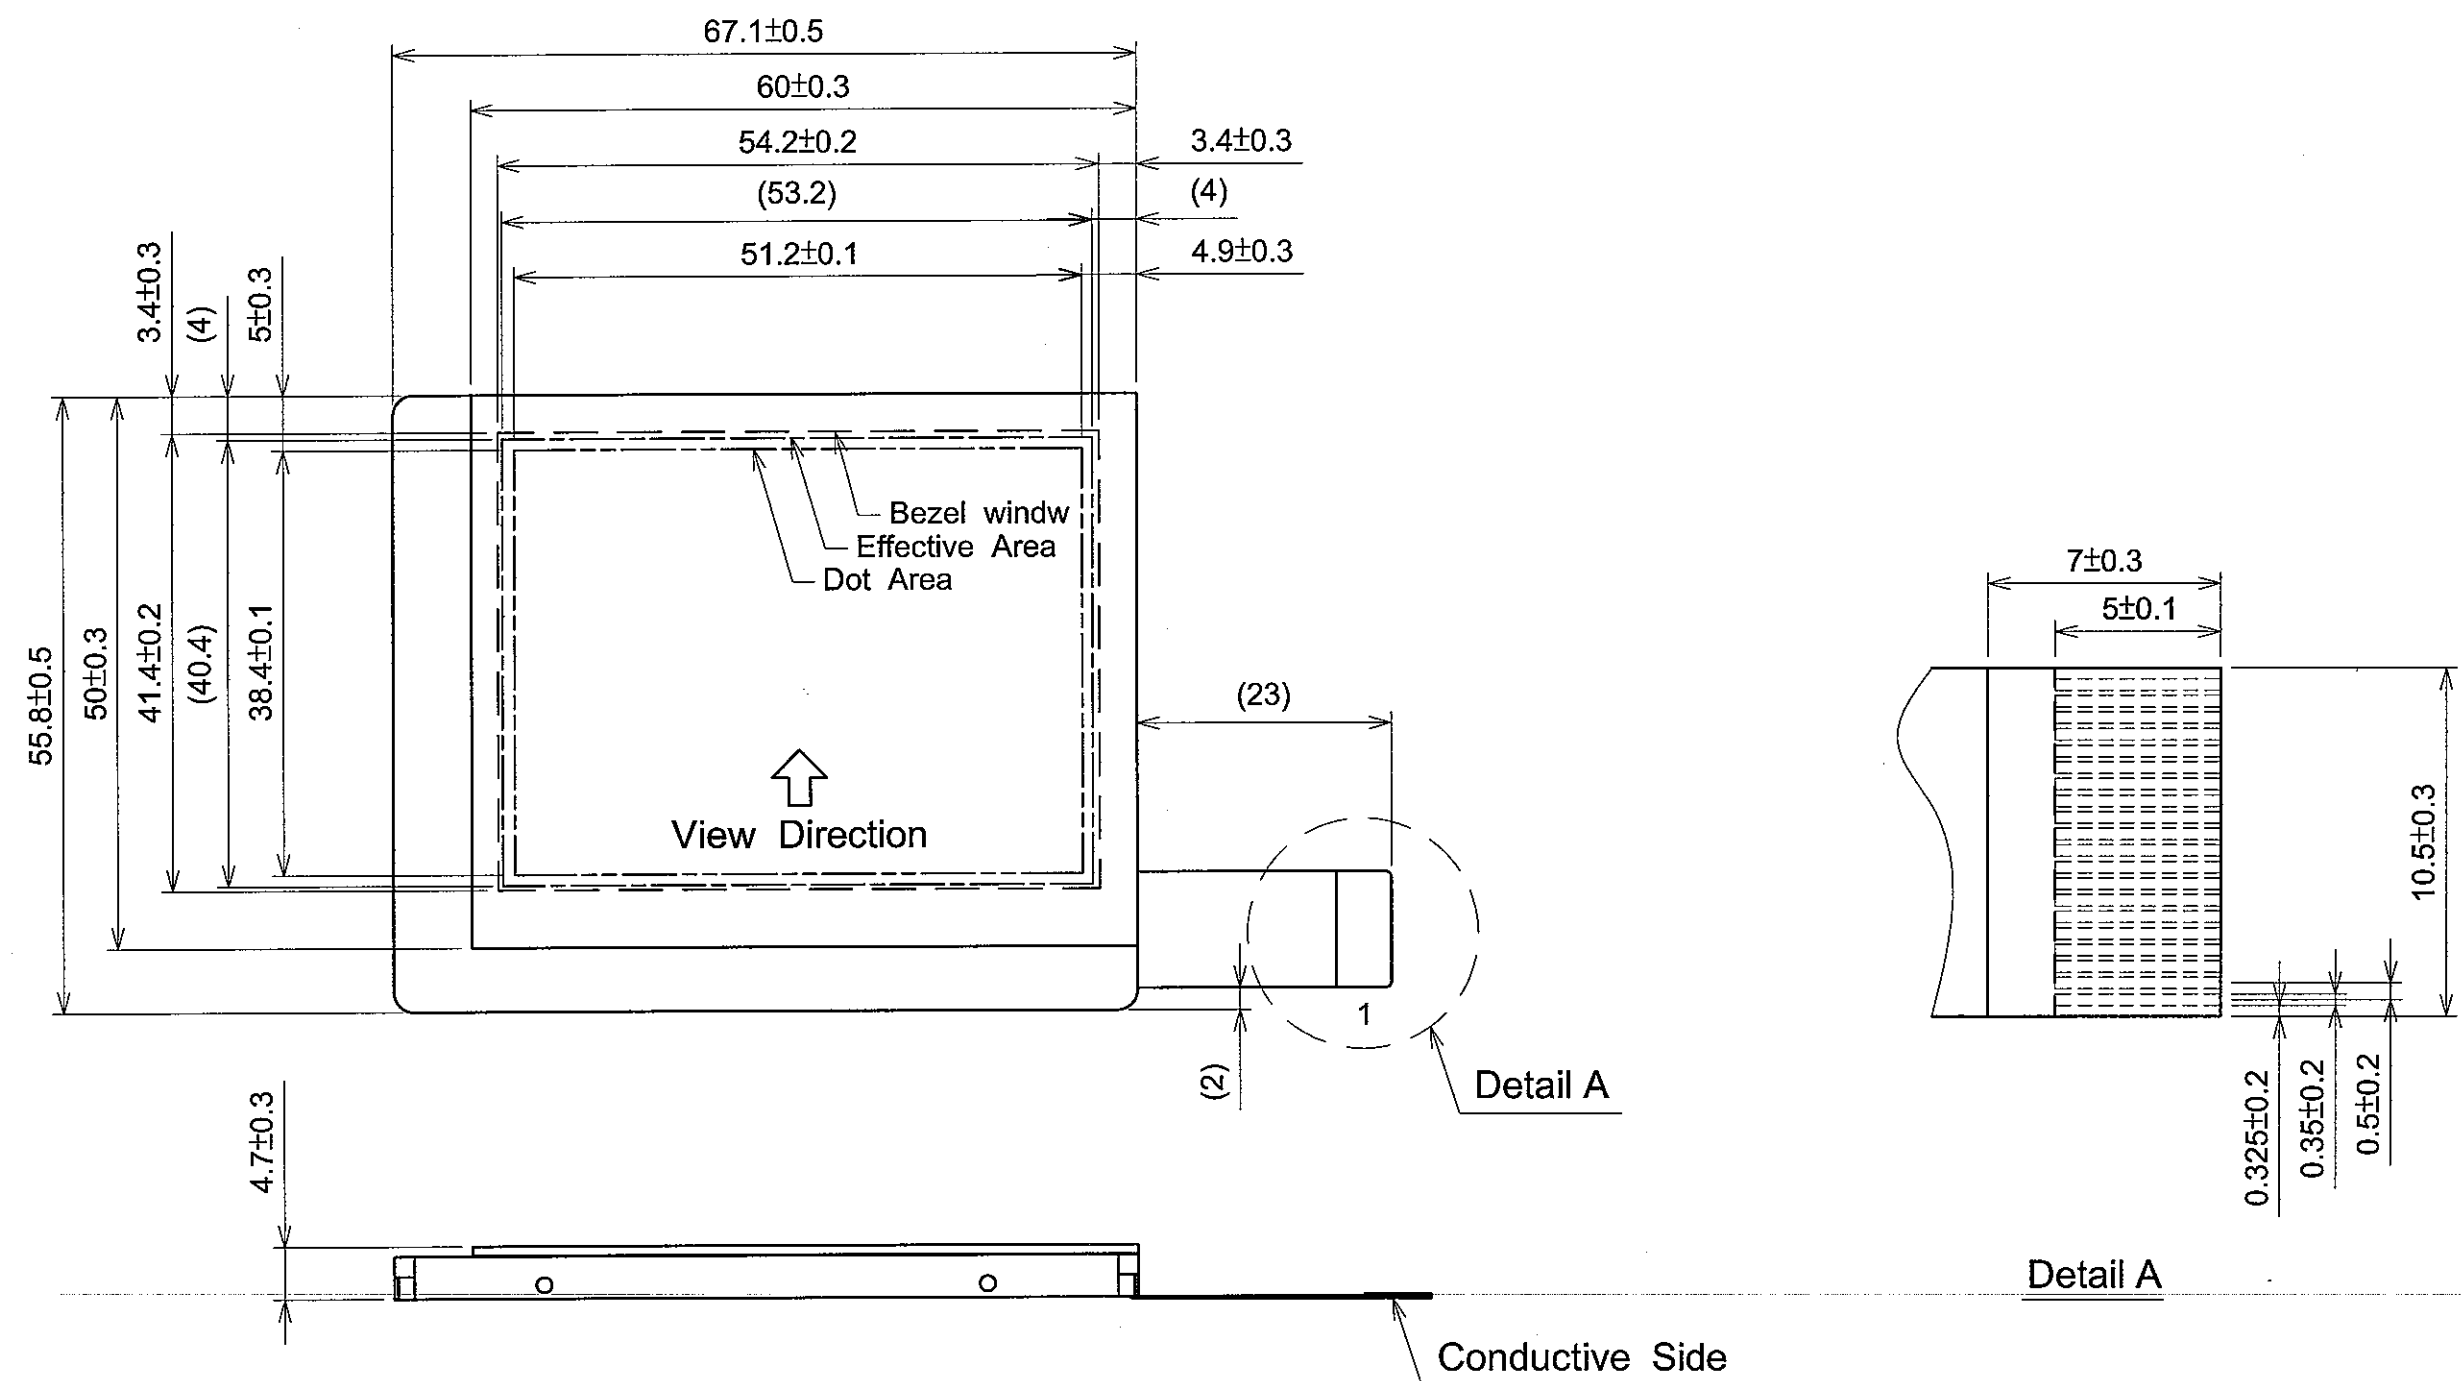

- Notes:
- 1. Reference mark : ()
 - 2. Unit : mm
 - 3. Scale : NTS
 - 4. Measurement when adding 9.8×10^4 Pa at the measuring point

9.2 DISPLAY PATTERN

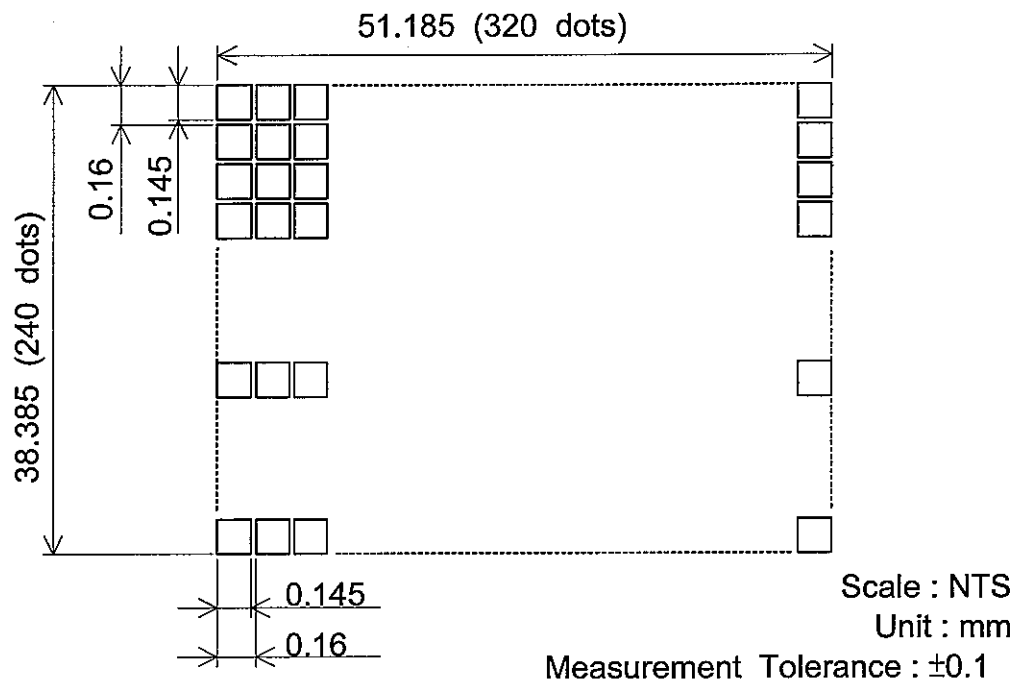

9.3 INTERFACE PIN CONNECTION

9.3.1 CN1 : LCM I/F (0.5mm PITCH , 20PINS FPC)

PIN No.	SYMBOL	FUNCTION
1	VLED(-)	Power supply for LED backlight
2	VLED(+)	Power supply for LED backlight
3	D0	Input data signal
4	D1	Input data signal
5	D2	Input data signal
6	D3	Input data signal
7	VSH	Power supply for LCD (Seg driver)
8	VM	Power supply for LCD
9	VSS	Ground
10	CL2	Clock pulse for Seg shift
11	VSS	Ground
12	CL1	1) Latch pulse of display data 2) Shift clock for Com driver
13	DOFF	Hi : Display on ; Low : Display off
14	VDD	Power supply for logic
15	FLM	Frame start signal data signal of the shift register of the Com driver
16	VCH	Power supply for LCD (Com driver)
17	X(L)	Analog signal for Touch Panel
18	Y(T)	Analog signal for Touch Panel
19	X(R)	Analog signal for Touch Panel
20	Y(B)	Analog signal for Touch Panel

10. QUALITY STANDARD


10.1 APPEARANCE INSPECTION CONDITIONS (IN THE VIEWING AREA)

Visual inspection under single 20W fluorescent lamp with eyes to LCD distance 25cm and lamp to LCD distance 25 to 30cm.

Viewing angle should be smaller than 45° .

The line of sight for inspection shall be inside the half section of a cone which consisted of line segment 45° to the axis with vertex at the center of LCD.


The cone axis perpendicular to the LCD and passing through the fluorescent lamp.

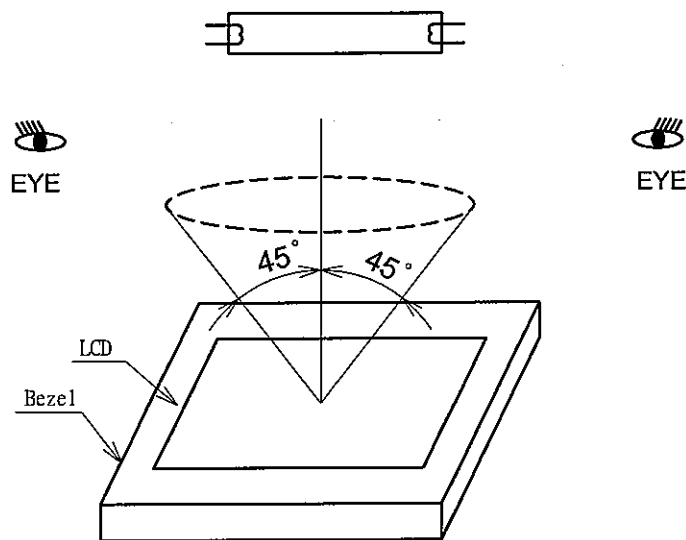

10.2 DEFINITION OF EACH ZONE

A zone : Within the active area specified at page 9-1/2 of this document.

B zone : Area between the edge line of LCM and the active area line specified at page 9-1/2 of this document.

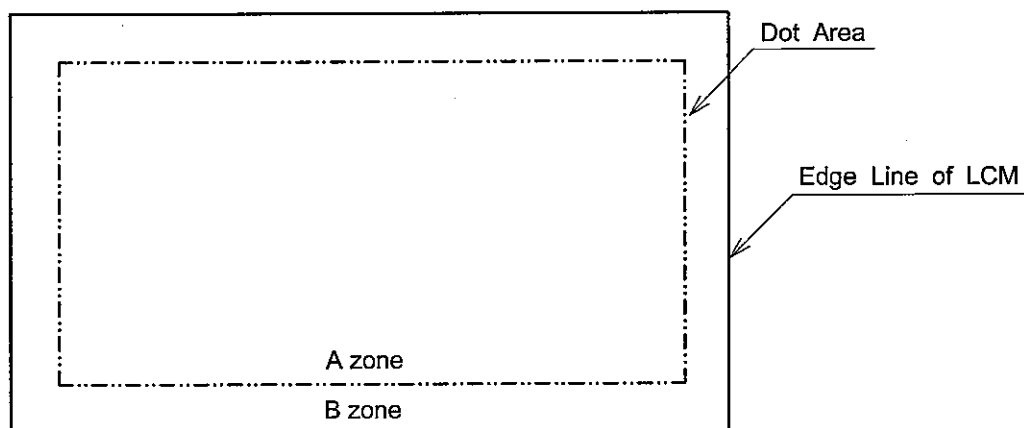


10.3 APPEARANCE SPECIFICATION

*) If the problem occurs about this item, the responsible person of both party (customer and HITACHI) will discuss more detail.

No.	ITEM	CRITERIA				A	B
L C D	Scratches	Distinguished one is not acceptable (to be judge by HITACHI limit sample)				*	-
	Dent	Same as above				*	-
	Wrinkles in Polarizer	Same as above				*	-
	Bubbles	Average Diameter D(mm)		Maximum Number Acceptable		○	-
		D≤0.2		Ignore			
		0.2<D≤0.3		12			
		0.3<D≤0.5		3			
		(Note 1) 0.5<D		None			
	Stains, Foreign Materials Dark Spot	Filamentous				○	*
		Length L(mm)	Width W(mm)	Maximum Number Acceptable			
		L≤2.0	W≤0.03	Ignore			
		L≤3.0	0.03<W≤0.05	6			
		-	0.05<W	None			
		Round				○	*
		Average Diameter D(mm)	Maximum Number Acceptable	Minimum Space			
		D≤0.2	Ignore	-			
		0.2<D≤0.33	8	10 mm			
		0.33<D	None	-			
		The whole number		Filamentous + Round = 10			
		(Note 1,2)	Those wiped out easily are acceptable				○
	Color Tone	To be judged by HITACHI limit sample				○	-
	Color Uniformity	Same as above				○	-
	Pinhole	Average Diameter D(mm)		Maximum Number Acceptable		○	-
		D≤0.15		Ignore			
		0.15<D≤0.3		10			
		Note (1) 0.3<D		None			
Contrast Irregularity (Spot)	Average Diameter D(mm)	Contrast	Maximum Number Acceptable	Minimum Space			
	D≤0.25	To be Judge by HITACHI standard	Ignore	-			
	0.25<D≤0.35		10	20mm			
	0.35<D≤0.5		4	20mm			
	(Note .1) 0.5 <D		None	-			

No.	ITEM	CRITERIA				A	B
L C D	Contrast Irregularity (Line) (A Pair of Scratch)	Width W(mm)	Length L(mm)	Maximum acceptable umber	Minimum space	○	-
		$W \leq 0.25$	$L \leq 1.2$	2	20mm		
		$W \leq 0.2$	$L \leq 1.5$	3	20mm		
		$W \leq 0.15$	$L \leq 2.0$	3	20mm		
		$W \leq 0.1$	$L \leq 3.0$	4	20mm		
	Note (2)	The whole number ≤ 6					
	Rubbing Scratch	To be judged by HITACHI limit sample				○	-


Note (1)

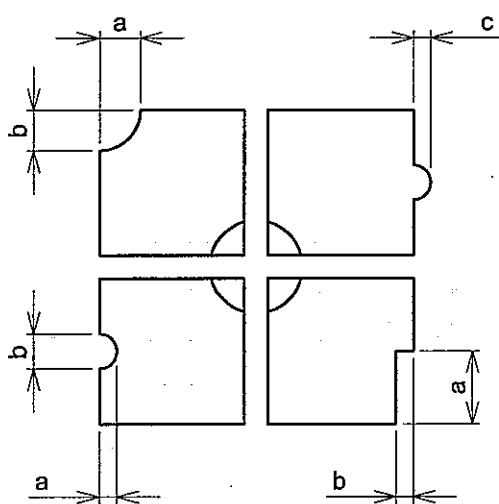

$$\frac{a+b}{2} = D \dots \text{Average Diameter}$$

c...Salient

(2) Definition of length L and width W

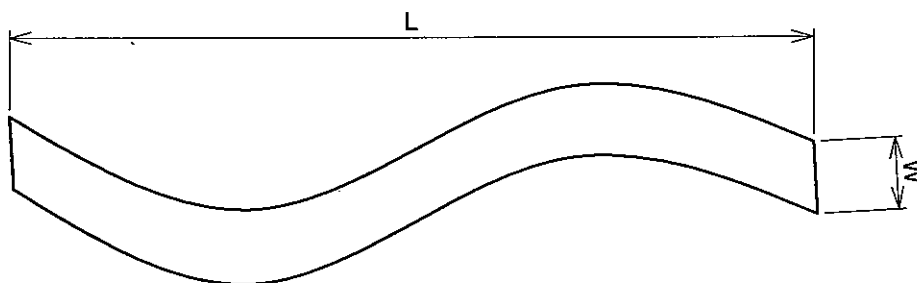

11. PRECAUTION IN DESIGN

11.1 LC DRIVING VOLTAGE AND VIEWING ANGLE RANGE.

Setting VCH out of the recommended condition will be a cause for a change of viewing angle range.

11.2 CAUTION AGAINST STATIC CHARGE

As this module is provided with C-MOS LSI, the care to take such a precaution as to grounding the operator's body is required when handling it.

11.3 POWER ON SEQUENCE

Input signals should not be applied to LCD module before power supply voltage is applied and reaches to specified voltage ($3.3 \pm 10\%$). If above sequence is not kept, C-MOS LSI of LCD modules may be damaged due to latch up problem.

11.4 PACKING

- (1) No leaving products is preferable in the place of high humidity for a long period of time. For their storage in the place where temperature is 35° or higher, special care to prevent them from high humidity is required.
A combination of high temperature and high humidity may cause them polarization degradation as well as bubble generation and polarizer pell-off. Please keep the temperature and humidity within the specified range for use and storage.
- (2) Since upper polarizers and lower aluminum to be easily damaged, they should be handled with full care so as not to get them touched, pushed or rubbed by a piece of glass, tweezers and anything else which are harder than a pencil lead 3H.
- (3) As the adhesives used for adhering upper/lower polyester and aluminum plates are made of organic substances which will deteriorated by a chemical reaction with such chemicals as acetone, Toulon, ethanol and isopropyl alcohol. The following solvents are recommended for use:
normal hexane

Please contact us when it is necessary for you to use chemicals other than the above.

- (4) Lightly wipe to clean the dirty surface with absorbent cotton waste or other soft material like chamois, soaked in the chemicals recommended without scrubbing it hardly. To prevent the display surface from damage and keep the appearance in good state, it is sufficient, in general, to wipe it with absorbent cotton.
- (5) Immediately wipe off saliva or water drop attached on the display area because its long period adherence may cause deformation or faded color on the spot.
- (6) Foggy dew deposited on the surface and contact terminals due to coldness will be cause for polarizer damage, stain and dirt on product.
When necessary to take out the products from some place at low temperature for test, etc. It is required for them to be warmed up in a container once at the temperature higher than that of room.
- (7) Touching the display area and contact terminals with bare hands and contaminating them are prohibited , because the stain on the display area and poor insulation between terminals are often caused by being touched by bare hands.
(There are some cosmetics detrimental to polarizers.)
- (8) In general the quality of glass is fragile so that it tends to be cracked or chipped in handling, specially on its periphery. Because be careful not to give it sharp shock caused by dropping down, etc.

11.5 CAUTION FOR OPERATION

- (1) It is an indispensable condition to drive LCD within the specified voltage limit since the higher voltage than the limit causes the shorter LCD life. An electrochemical reaction due to direct current causes LCD's undesirable deterioration, so that the use of direct current driver should be avoided.
 - (2) Response time will be extremely delayed at lower temperature than the specified operating temperature range and on the other hand LCD's show dark blue Color in then however those phenomena do not mean Malfunction or out of order with LCD's which will come back in the specified operation temperature range.
 - (3) If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
 - (4) A slight dew depositing on terminals is a cause for electrochemical reaction resulting in terminal open circuit.
- Please operate the LCD module under the relative condition of 40°C 85%RH.

11.6 STORAGE

In case of storing for a long period of time (for instance ,for years) for the purpose of replacement use, the following ways are recommended.

- (1) Storage in a polyethylene bag with the opening sealed so as not to enter fresh air outside in it, and with no desiccant.
- (2) Placing in a dark place where neither exposure to direct sunlight nor light is, keeping temperature in the range from -30°C to 80°C
- (3) Storing with no touch on polarizer surface by anything else.
(It is recommended to store them as they have been contained in the inner container at the time of delivery from us.)


11.7 SAFETY

- (1) It is recommendable to crash damaged or unnecessary LCD's into pieces and wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.
- (2) When any liquid leaked out of a damage glass cell comes in contact with your hands, please wash it off well with soap and water.

12. DESIGNATION OF LOT MARK

12.1 LOT MARK

Lot mark is consisted of 4 digits for production lot and 6 digits for production control.

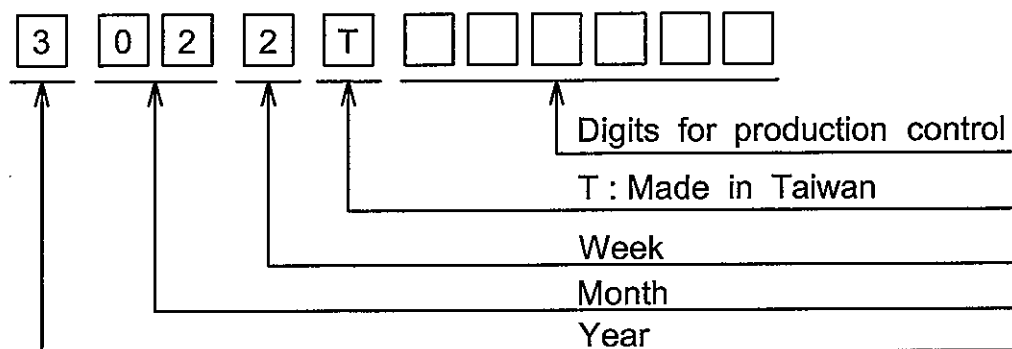

YEAR	FIGURE IN LOT MARK
2004	4
2005	5
2006	6
2007	7
2008	8

MONTH	FIGURE IN LOT MARK	MONTH	FIGURE IN LOT MARK
Jan.	01	Jul.	07
Feb.	02	Aug.	08
Mar.	03	Sep.	09
Apr.	04	Oct.	10
May	05	Nov.	11
Jun.	06	Dec.	12

WEEK (DAY IN CALENDAR)	FIGURE IN LOT MARK
1~7	1
8~14	2
15~21	3
22~28	4
29~31	5

12.2 REVISION

REV No.	ITEM	LOT No.	PRODUCTION CONTROL No.
A			000001~

12.3 LOCATION OF LOT MARK

On the back side of LCM.

13. PRECAUTION FOR USE

- (1) A limit sample should be provided by the both parties on an occasion when the both parties agreed its necessity. Judgement by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.
- (2) On the following occasions, the handling of the problem should be decided through discussion and agreement between responsible persons of the both parties.
 - (1) When a question is arisen in the specifications.
 - (2) When a new problem is arisen which is not specified in this specifications.
 - (3) When an inspection specifications change or operating condition change in customer is reported to HITACHI, and some problem is arisen in this specification due to the change.
 - (4) When a new problem is arisen at the customer's operating set for sample evaluation in the customer site.

The precaution that should be observed when handling LCM have been explained above. If any points are unclear or if you have any requests , please contact HITACHI.

14. DIGITIZER TECHNICAL SPECIFICATION

14.1 RATINGS

14.1.1 ABSOLUTE MAXIMUM RATINGS

ITEM	SPECIFICATION	COMMENT
Operating Voltage	7VDC max.	
Contact Current	20mA max.	
Operating Temperature	-20 ~70°C	Without Condensation
Storage Temperature	-30 ~80°C	

14.1.2 OPERATING CONDITIONS

ITEM	SPECIFICATION
Operating Voltage	5VDC
Contact Current	10 ~ 20 mA
Actuation Force	20~100g (R0.8mm,Poly-acetal Pen)

14.2 MECHANICAL STRENGTH

14.2.1 INPUT METHOD &ACTUATION FORCE

INPUT METHOD	ACTUATION FORCE	COMMENT
Pen	20~100 g	R0.8mm,Poly-acetal Pen
Finger	20~100g	R8mm,Silicone Rubber

14.2.2 SURFACE HARDNESS

3H min. Test Method : JIS-K5400.

14.3 OPTICAL CHARACTERISTICS

14.3.1 TRANSPARENCY : 80%.min.

14.3.2 NEWTON RING : None appearance.

14.4 ELECTRICAL CHARACTERISTICS

14.4.1 CONDUCTIVE RESISTANCE

TERMINAL	SPECIFICATIONS
XR-XL	130~500Ω
YT-YB	200~650Ω


14.4.2 INSULATION RESISTINCE

TERMINAL	SPECIFICATIONS
X-Y	20MΩ

Operating Voltage : 25VDC

14.4.3 BOUNCE CHATTERING

10ms max.

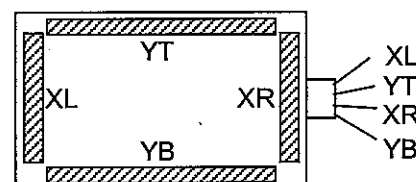


14.4.4 LINEARITY

(1) SPECIFICATION : 1.5% max.

(2) TESTING CIRCUIT

(a) X Axis linearity testing method (With tip radius 0.8, poly-acetal pen).
VXR-XL=5V, VOUT=VYT

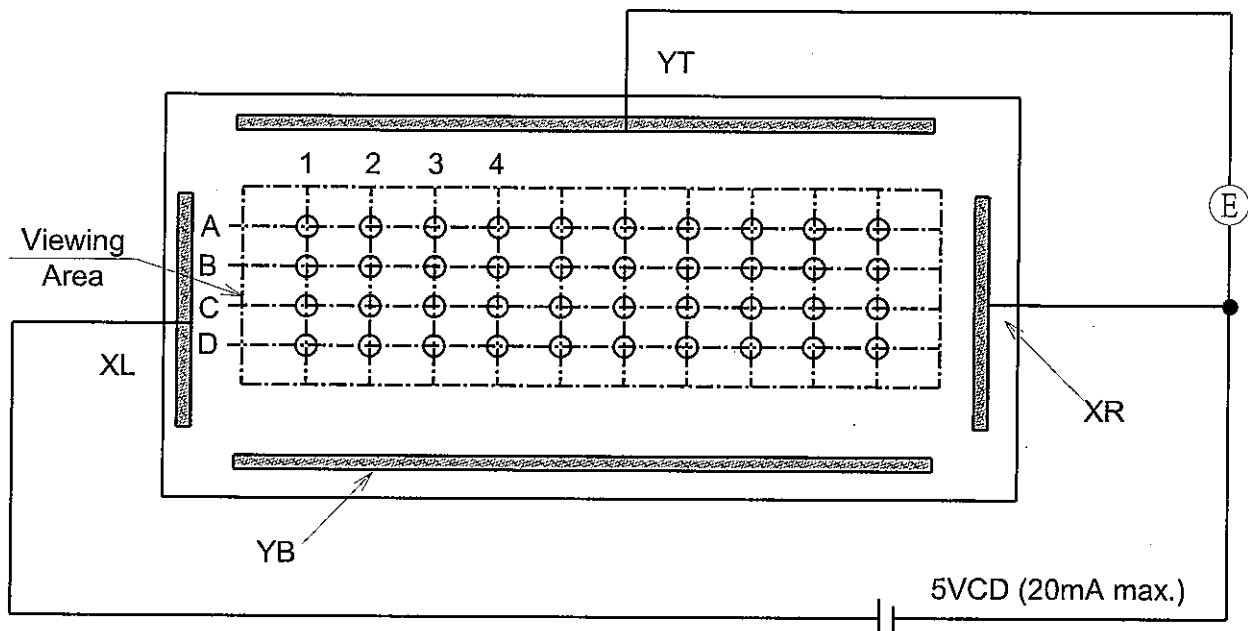


(b) Y Axis linearity method , VYT-YB=5V , VOUT=VXL

(3) CALCULATION

(a) Y Axis Linearity

$$\text{LINEARITY} = \frac{\Delta E \text{ max.}}{EA1 - EA10} \times 100(\%)$$

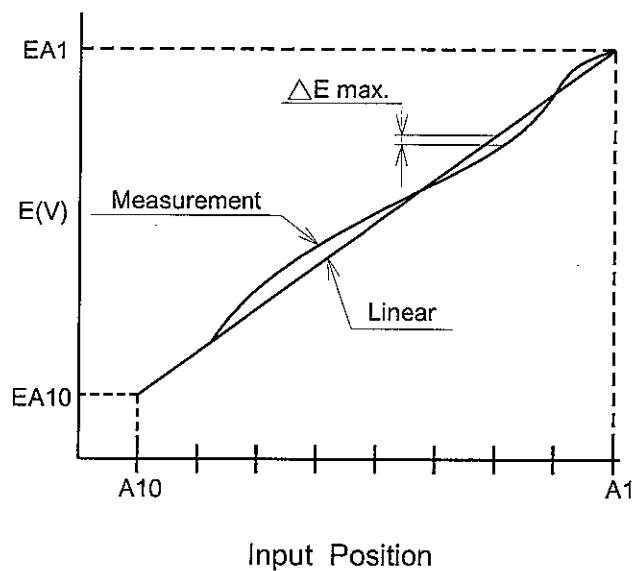

14.5 ENVIRONMENTAL TESTING




ITEM	CONDITIONS	CRITERIA
Durability for Point Selections	250g (Speed : 3 times/s) R0.8mm, Poly-acetal pen 1 Million activations	After testing must to Meet the specifications of the electrical, Mechanical & Optical Characteristics.
Durability for Hand Writing	250g, R0.8mm, Poly-acetal pen 100 Thousand Katakana characters in a 20mm x 20mm place (Speed : 3000 characters /h	

14.6 APPEARANCE SPECIFICATION





14.6.1 VIEWING AREA

Please refer page 10-2/3 , 10-3/3 appearance specification

14.6.2 OUT OF VIEWING AREA

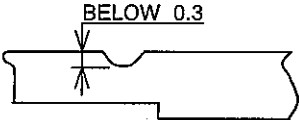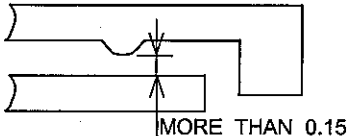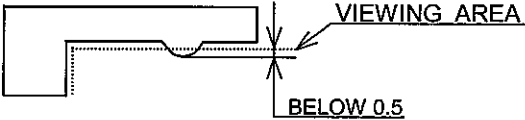ITEM	SPECIFICATIONS
Conducting Print Pattern Indentation	
Conducting Print Pattern Gap	
Within Viewing Area Conducting Paste Entrance	

14.6.3 GLASS INDENTATION

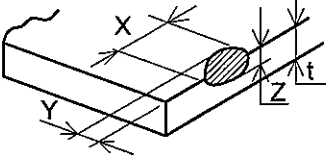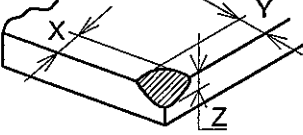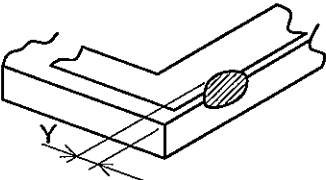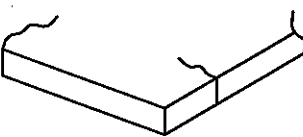ITEM	SPECIFICATIONS							
Common Indentation	 <table border="1" data-bbox="1082 228 1369 318"> <tr> <th>X</th><th>Y</th><th>Z</th></tr> <tr> <td>≤ 5.0</td><td>≤ 3.0</td><td>$\leq t$</td></tr> </table> <p>But , indentation can not including seal area. t : Glass thickness.</p>	X	Y	Z	≤ 5.0	≤ 3.0	$\leq t$	
X	Y	Z						
≤ 5.0	≤ 3.0	$\leq t$						
Corner Broken	 <table border="1" data-bbox="1082 519 1369 609"> <tr> <th>X</th><th>Y</th><th>Z</th></tr> <tr> <td>≤ 2.0</td><td>≤ 5.0</td><td>$\leq t$</td></tr> </table> <p>But , indentation can not including seal area.</p>	X	Y	Z	≤ 2.0	≤ 5.0	$\leq t$	
X	Y	Z						
≤ 2.0	≤ 5.0	$\leq t$						
Indentation Witnin Pattern	 <p>$Y \leq 1$ Is ignore But , Must to meet the specification of conducting pattern indentation.</p>							
Proceeding Crack	 <p>None</p>							

14.6.4 OTHERS

- (1) There is not any wrinkle on the pet film.
- (2) There is not any fish-eye and newton ring.