

RoHS Compliant Product
A suffix of "-C" specifies halogen free


FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction


MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.64 grams (approximate)

ITO-220

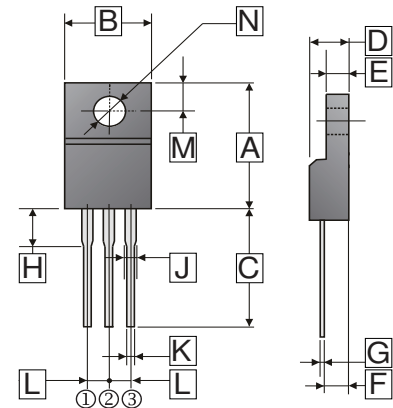

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	14.60	15.60	H	3.00	3.80
B	9.50	10.50	J	0.90	1.50
C	12.60	13.70	K	0.50	0.90
D	4.30	4.70	L	2.34	2.74
E	2.50	3.2	M	2.40	2.90
F	2.40	2.80	N	φ 3.0	φ 3.4
G	0.30	0.70			



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)


Parameter		Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage		V_{RRM}	60	V
Working Peak Reverse Voltage		V_{RSM}	60	V
Maximum DC Blocking Voltage		V_{DC}	60	V
Maximum Average Forward Rectified Current	Per Leg	I_F	7.5	A
	Per Device		15	
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)		I_{FSM}	200	A
Maximum Instantaneous Forward Voltage	$I_F=7A, T_A=25^{\circ}C, \text{ per leg}$	V_F	0.59	V
	$I_F=7A, T_A=125^{\circ}C, \text{ per leg}$		0.54	
Maximum DC Reverse Current at Rated DC Blocking Voltage ³	$T_A = 25^{\circ}C$	I_R	0.2	mA
	$T_A = 125^{\circ}C$		15	
Typical Junction Capacitance ¹		C_J	250	pF
Typical Thermal Resistance ²		$R_{\theta JC}$	8	$^{\circ}C / W$
Voltage Rate Of Change (Rated V_R)		dv / dt	10000	$V / \mu s$
Operating Temperature Range T_J		T_J	-50~150	$^{\circ}C$
Storage Temperature Range T_{STG}		T_{STG}	-65~150	$^{\circ}C$

Notes:


1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.
3. Pulse test: 300μs pulse width, 2% duty cycle.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

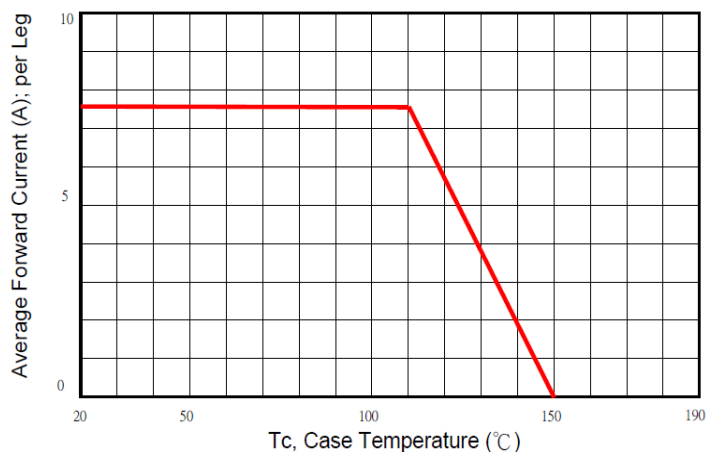


Typical Forward Characteristic

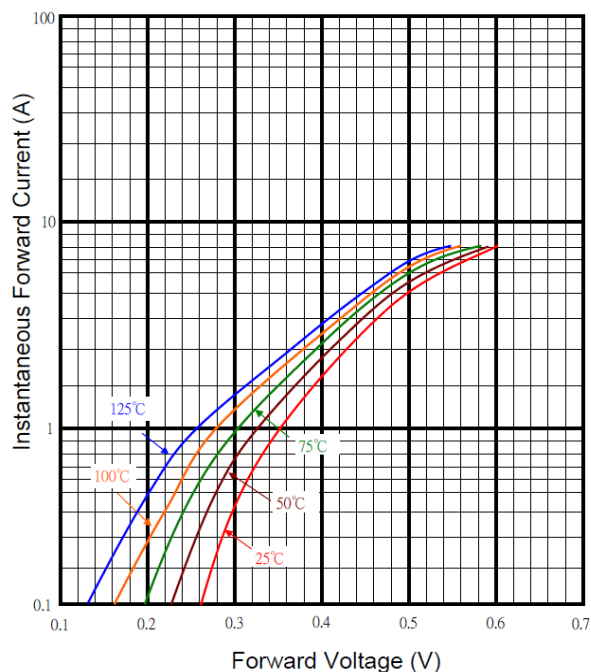

Maximum Non- Repetitive Forward Surge Current

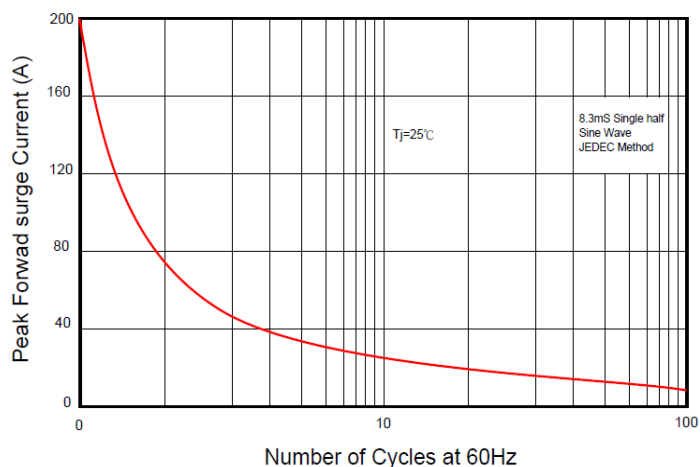

Typical Reverse Characteristic

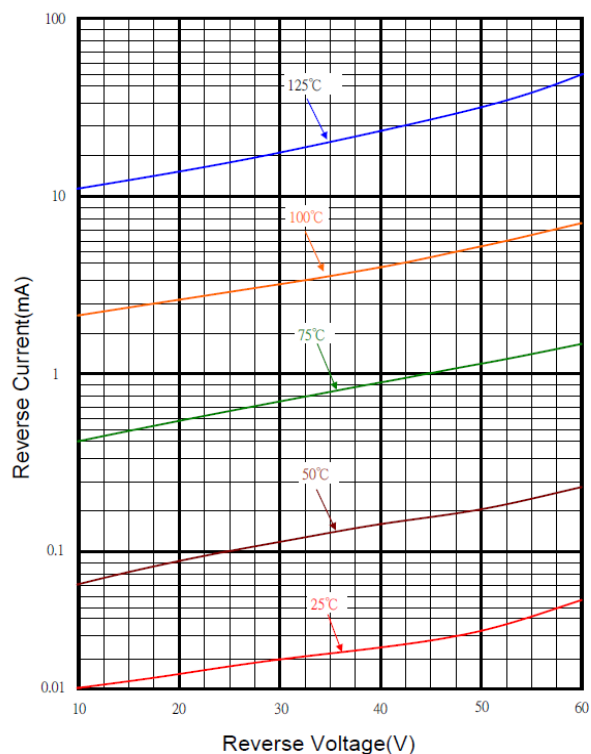

Typical Junction Capacitance

