



SP435W

Dual OP AMP with Voltage Regulator

DESCRIPTION

The **SP435W** is a monolithic IC specifically designed to control the output current and voltage levels of switch mode battery chargers and power supplies.

The device contains two operational amplifiers and a precision shunt regulator. Op Amp 1 is designed for voltage control, whose non-inverting input internally connects to the output of the shunt regulator. Op Amp 2 is for current control with both inputs uncommitted. The IC offers the power converter designer a control solution that features increased precision with a corresponding reduction in system complexity and cost.


APPLICATIONS

- Battery Power Equipment
- Linear Regulators
- Switch Power Supply
- Cellular Phone
- Digital Cameras
- Computer Disk Drivers
- Instrumentation

FEATURES

- Input offset voltage: 0.5mV
- Supply current: 75 μ A per Op Amp at 5.0V supply voltage
- Unity gain bandwidth: 1MHz
- Output voltage swing: 0 to (VCC- 1.5) V
- Power supply range: 3 to 36V
- Fixed output voltage reference: 2.5V
- Sink current capability from 0.05 to 80mA
- Typical Output Impedance : 0.2 Ω
- SOP-8 Package

PIN CONFIGURATION (SOP-8)

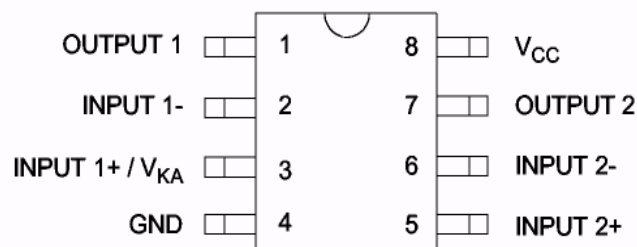

PART MARKING






SP435W

Dual OP AMP with Voltage Regulator

TYPICAL APPLICATION CIRCUIT

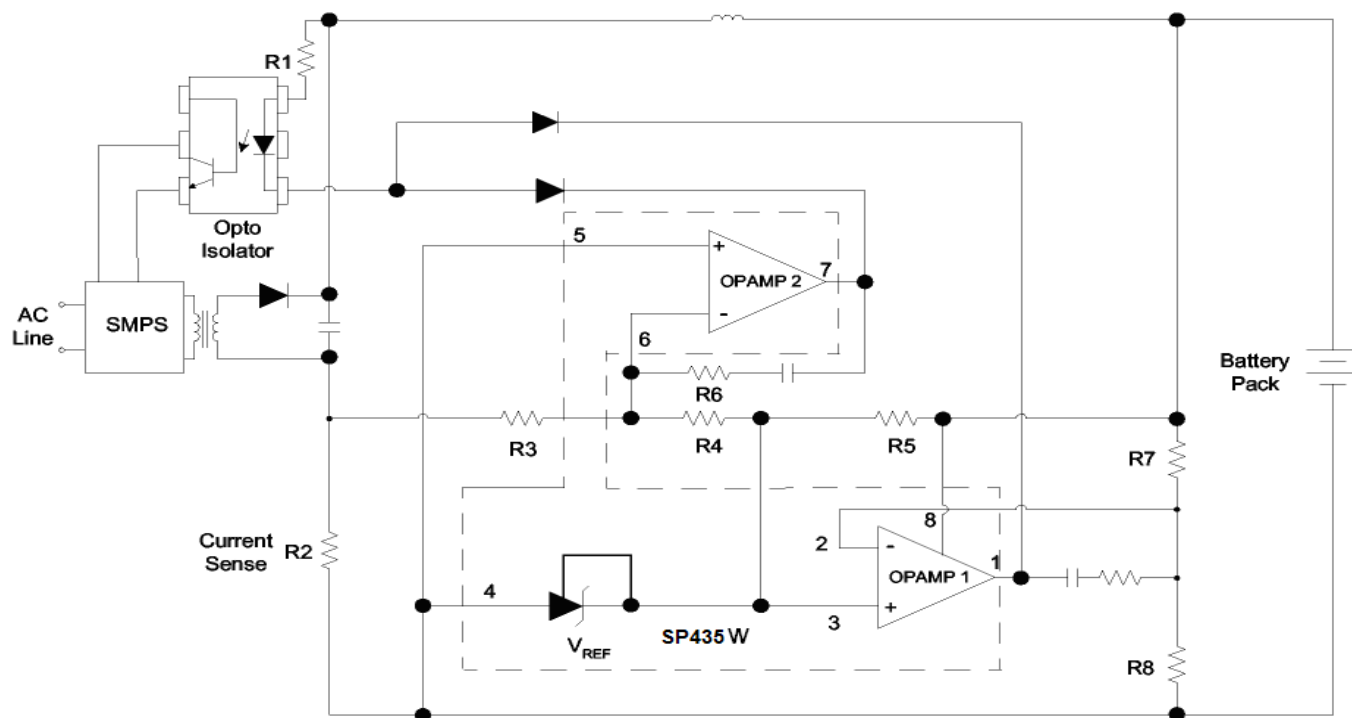

ORDERING INFORMATION

Part Number	Voltage tolerance	Package	Part Marking
SP435WS8RGB	$\pm 1\%$	SOP-8	SP435W


※ SP435WS8RGB : 13" Tape Reel; Pb – Free, Halogen-Free



SP435W

Dual OP AMP with Voltage Regulator

BLOCK DIAGRAM

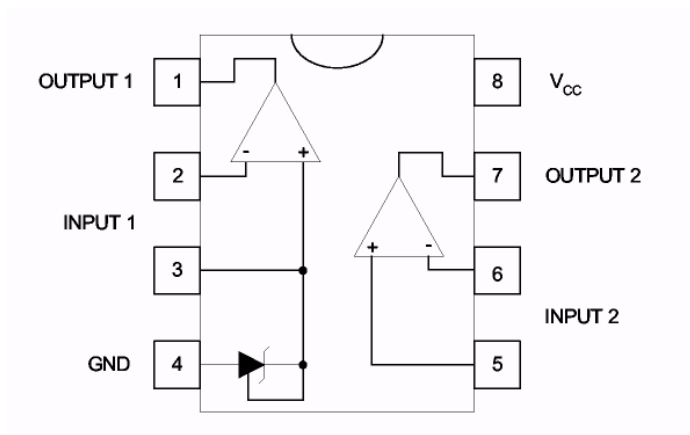

ABSOLUTE MAXIMUM RATINGS (TA=25°C, unless otherwise specified.)

The following ratings designate persistent limits beyond which damage to the device may occur.

Symbol	Parameter	Value	Unit
V _{CC}	DC Supply Voltage (V _{CC} to Ground)	40	V
V _{IN}	OP Amp 1 and 2 Input Voltage (Pin 2, 5, 6)	-0.3~V _{CC} +0.3	V
V _{ID}	OP Amp 2 Input Differential Voltage (Pin 5, 6)	40	V
I _K	Voltage Reference Cathode Current (Pin 3)	100	mA
T _{STG}	Storage Temperature Range	-65 to 150	°C
T _{LEAD}	Lead Soldering Temperature for 5 sec.	260	°C
Tope	Operation Temperature Range	-40 ~ 105	°C
P _D	Power Dissipation	500	mW



SP435W

Dual OP AMP with Voltage Regulator

ELECTRICAL CHARACTERISTICS

(Unless otherwise stated, these specifications apply $T_A=25^{\circ}\text{C}$; $V_{CC}=+5\text{V}$)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
SUPPLY						
V _{CC}	Supply Voltage		3		36	V
I _{CC}	Supply Current, excluding Current in Voltage Reference	V _{CC} = 5V, no load		0.15	0.25	mA
		V _{CC} = 30V, no Load		0.2	0.3	
VOLTAGE REFERENCE SECTION						
V _{REF}	Reference Voltage:SP435WS8RGB	I _{KA} =10 mA, Ta = 25°C	2.475	2.5	2.525	V
Δ V _{REF}	Reference Voltage Deviation over Temp Range	I _{KA} =10 mA, TA = -40~105°C		5	24	mV
I _{MIN}	Minimum Cathode Current for Regulation	V _{KA} = V _{REF}		0.01	0.05	mA
Z _{KA}	Dynamic Impedance	V _{KA} = V _{REF} , I _{KA} = 1mA~80mA, f<1KHz		0.2	0.5	Ω
OP AMP 1 SECTION (V _{CC+} = 5V, V _O = 1.4V)						
V _{IO}	Input Offset Voltage	T _A = 25°C		0.5	3.0	mV
		T _A = -40°C~105°C			5.0	
α V _{IO}	Input Offset Voltage Temperature Drift	T _A = -40°C~105°C		7		μ V/°C
I _{IB}	Input Bias Current (Inverting Input Only)			20	150	nA
A _{VD}	Large Signal Voltage Gain	V _{CC} = 15V, R _L = 2KΩ, V _O = 1.4~11.4V	85	100		V/mV
K _{SVR}	Power Supply Rejection Ratio	V _{CC+} = 5~30V	70	90		dB
I _{O(SINK)}	Output Sink Current	V _{CC} = 15V, V _{ID} = -1V, V _O = 2V	7	20		mA
I _{O(SOURCE)}	Output Source Current	V _{CC} = 15V, V _{ID} = 1V, V _O = 2V	20	40		mA
V _{OH}	Output Voltage Swing High	V _{CC} = 30V, V _{ID} = 1V, R _L = 10KΩ	27	28		V
V _{OL}	Output Voltage Swing Low	V _{CC} = 30V, V _{ID} = -1V, R _L = 10KΩ		17	100	mV
SR	Slew Rate	V _{CC} = 18V, R _L = 2KΩ, V _I = 0.5~2V, C _L = 100 pF	0.2	0.5		V/μ S
GBW	Gain Bandwidth Product	V _{CC} = 30V, R _L = 2KΩ, C _L = 100 pF	0.7	1		MHz



SP435W

Dual OP AMP with Voltage Regulator

ELECTRICAL CHARACTERISTICS

(Unless otherwise stated, these specifications apply $T_A=25^{\circ}\text{C}$; $V_{CC}=+5\text{V}$)





Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
OP AMP 2 SECTION ($V_{CC+} = 5\text{V}$, $V_O = 1.4\text{V}$)						
V_{IO}	Input Offset Voltage	$T_A = 25^{\circ}\text{C}$		0.5	3.0	mV
		$T_A = -40^{\circ}\text{C} \sim 105^{\circ}\text{C}$			5.0	
αV_{IO}	Input Offset Voltage Temperature Drift	$T_A = -40^{\circ}\text{C} \sim 105^{\circ}\text{C}$		7		$\mu\text{V}/^{\circ}\text{C}$
I_{IO}	Input Offset Current			2	30	nA
I_{IB}	Input Bias Current (Inverting Input Only)			20	150	nA
V_{ICR}	Input Common Mode Voltage Range	$V_{CC} = 0 \text{ to } 36\text{V}$	0		$V_{CC} - 1.5$	V
CMRR	Common Mode Rejection Ratio	$T_A = 25^{\circ}\text{C}$, $V_{CM} = 0 \sim 3.5\text{V}$	70	85		dB
A_{VD}	Large Signal Voltage Gain	$V_{CC} = 15\text{V}$, $R_L = 2\text{K}\Omega$, $V_O = 1.4 \sim 11.4\text{V}$	85	100		V/mV
K_{SVR}	Power Supply Rejection Ratio	$V_{CC+} = 5 \sim 30\text{V}$	70	90		dB
$I_{O(SINK)}$	Output Sink Current	$V_{CC} = 15\text{V}$, $V_{ID} = -1\text{V}$, $V_O = 2\text{V}$	7	20		mA
$I_{O(SOURCE)}$	Output Source Current	$V_{CC} = 15\text{V}$, $V_{ID} = 1\text{V}$, $V_O = 2\text{V}$	20	40		mA
V_{OH}	Output Voltage Swing High	$V_{CC} = 30\text{V}$, $V_{ID} = 1\text{V}$, $R_L = 10\text{K}\Omega$	27	28		V
V_{OL}	Output Voltage Swing Low	$V_{CC} = 30\text{V}$, $V_{ID} = -1\text{V}$, $R_L = 10\text{K}\Omega$		17	100	mV
SR	Slew Rate	$V_{CC} = 18\text{V}$, $R_L = 2\text{K}\Omega$, $V_I = 0.5 \sim 2\text{V}$, $C_L = 100\text{pF}$	0.2	0.5		$\text{V}/\mu\text{S}$
GBW	Gain Bandwidth Product	$V_{CC} = 30\text{V}$, $R_L = 2\text{K}\Omega$, $C_L = 100\text{pF}$	0.7	1		MHz



SP435W

Dual OP AMP with Voltage Regulator

SOP- 8 PACKAGE OUTLINE

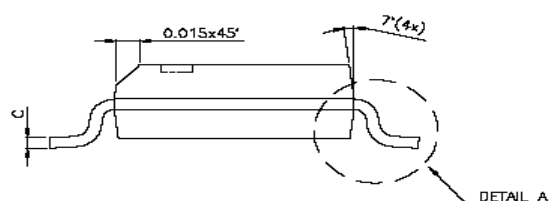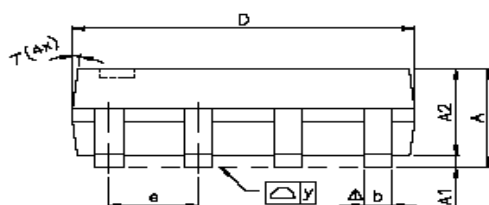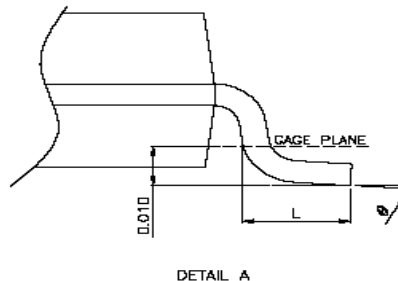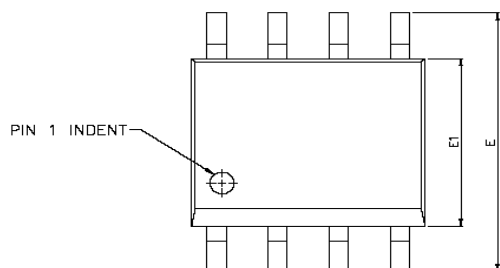

SYMBOLS	DIMENSIONS IN MILLIMETERS			DIMENSIONS IN INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.47	1.60	1.73	0.058	0.063	0.068
A1	0.10	—	0.25	0.004	—	0.010
A2	—	1.45	—	—	0.057	—
b	0.33	0.41	0.51	0.013	0.016	0.020
C	0.19	0.20	0.25	0.0075	0.008	0.0098
D	4.80	4.85	4.95	0.189	0.191	0.195
E	5.80	6.00	6.20	0.228	0.236	0.244
E1	3.80	3.90	4.00	0.150	0.154	0.157
e	—	1.27	—	—	0.050	—
L	0.38	0.71	1.27	0.015	0.028	0.050
Δy	—	—	0.076	—	—	0.003
θ	0°	—	8°	0°	—	8°



SP435W

Dual OP AMP with Voltage Regulator

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties, which may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

© The SYNC Power logo is a registered trademark of SYNC Power Corporation

© 2018 SYNC Power Corporation – Printed in Taiwan – All Rights Reserved

SYNC Power Corporation

7F-2, No.3-1, Park Street

NanKang District (NKSP), Taipei, Taiwan, 115, R.O.C

Phone: 886-2-2655-8178

Fax: 886-2-2655-8468

<http://www.syncpower.com>