



SP689A

Ultra High Voltage Start Up

DESCRIPTION

The SP689A is a low cost version ultra high voltage start up IC. This IC is ideal to use in conjunction with any PWM to further reduce the standby power. By using SP689A, it can eliminate the need for startup resistors and bleeder resistors in switching mode power supply design. It would provide the users a superior AC/DC power application with higher efficiency and lower standby power. With low external component counts, SP689A is a low cost solution for the applications.

SP689A is available in SOT-23-5L package.

APPLICATIONS


- AC/DC Switching Power Adaptor
- Battery Charger
- Open-Frame Switching Power Supply
- LED Power Supply

FEATURES


- 700V CDMOS Process
- Auto Re-Start
- High-voltage start-up
- Low standby power circuits
- SOT-23-5L Package

PIN CONFIGURATION

SOT-23-5L

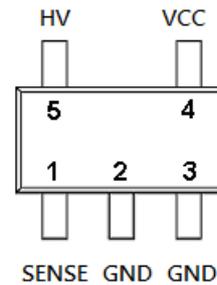


PART MARKING

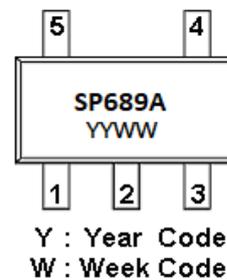



SP689A Ultra High Voltage Start Up


TYPICAL APPLICATION CIRCUIT

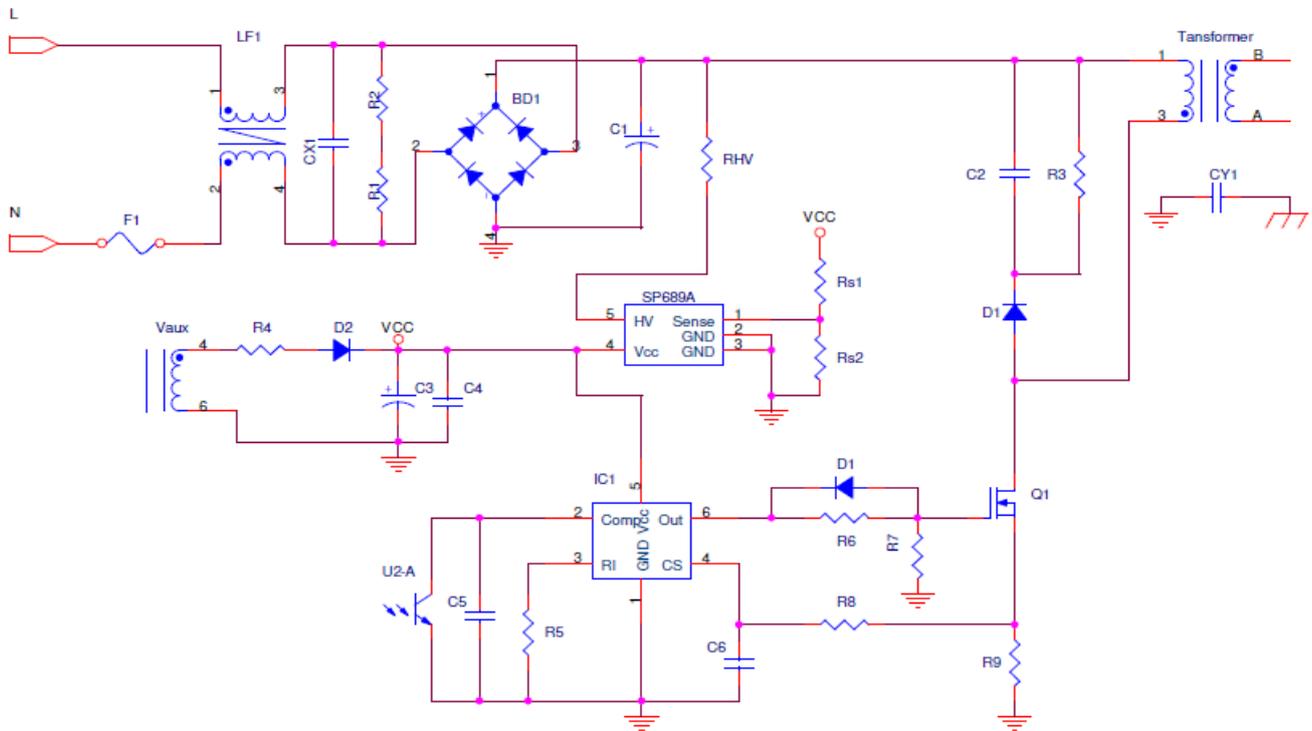

PIN DESCRIPTION

| Pin | Symbol | Description |
|-----|--------|---|
| 1 | SENSE | Sense External Signal to Switch off HV MOSFET |
| 2 | GND | Ground |
| 3 | GND | Ground |
| 4 | VCC | Supply Voltage In |
| 5 | HV | Ultra High Voltage |

BLOCK DIAGRAM

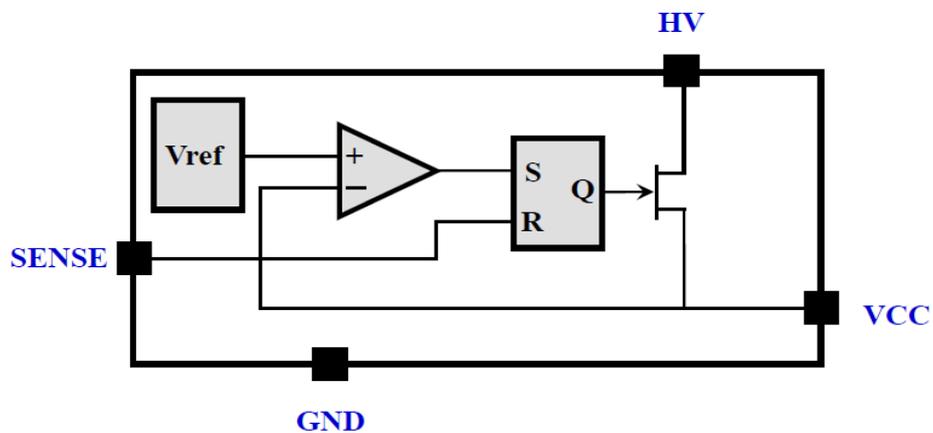



SP689A

Ultra High Voltage Start Up

ORDERING INFORMATION

| Part Number | Package | Part Marking |
|--------------|-----------|--------------|
| SP689AS25RGB | SOT-23-5L | SP689A |

※ SP689AS25RGB : Tape Reel ; Pb – Free ; Halogen-Free

ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified.)

The following ratings designate persistent limits beyond which damage to the device may occur.

| Symbol | Parameter | Value | Unit |
|--------------------|--|------------------|------|
| V _{HV} | HV Voltage | -0.3 ~ 700 | V |
| V _{CC} | VCC Voltage | -0.3 ~ 30 | V |
| V _{SENSE} | SENSE Voltage | -0.3 ~ 7.5 | V |
| P _D | Power Dissipation @ T _A =85°C (*) | 0.3 | W |
| ESD | Human Body Model | 4 | KV |
| | Machine Model | 300 | V |
| T _J | Operating Junction Temperature Range | -40 ~ 150 | °C |
| T _{STG} | Storage Temperature Range | -40 ~ 150 | °C |
| R _{θJC} | Thermal Resistance Junction – Case (*) | SOT-23-5L 210 | °C/W |

(*) The power dissipation and thermal resistance are evaluated under copper board mounted with free air conditions.

ELECTRICAL CHARACTERISTICS

(T_A=25°C, V_{HV}=30V, unless otherwise specified.)

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Unit |
|-----------------------|--|---|------|------|------|------|
| V _{HV} | HV Voltage | I _r =50uA | 650 | | | V |
| I _{startup} | Start Up Current | V _{HV} = 30V | | | 140 | uA |
| I _c | HV Current Source | V _{HV} = 30V, V _{CC} = 12V | 2.0 | 5.0 | 8.0 | mA |
| | | V _{HV} = 30V, V _{CC} = 16V | 1.5 | 4.0 | 6.5 | mA |
| | | V _{HV} = 120V, V _{CC} = 16V | 3.0 | | 8.0 | mA |
| V _{CC_RS} | Vcc decreasing level at when the HV Voltage Re-start | V _{HV} = 30V, | | 6.5 | | V |
| I _q | Quiescent Current, which HV turns-off | V _{HV} = 30V, V _{CC} = 16V | | 115 | 150 | uA |
| V _{SENSE HI} | Sense Voltage High(Logic level) | | 0.8 | | 1.2 | V |
| V _{SENSE LO} | Sense Voltage Low(Logic level) | | | | 0.3 | V |



SP689A

Ultra High Voltage Start Up

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties that may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

© The SYNC Power logo is a registered trademark of SYNC Power Corporation

© 2021 SYNC Power Corporation – Printed in Taiwan – All Rights

Reserved SYNC Power Corporation

7F-2, No.3-1, Park Street

NanKang District (NKSP), Taipei, Taiwan, 115,

R.O.C Phone: 886-2-2655-8178

Fax: 886-2-2655-8468

<http://www.syncpower.com>