



Sichuan Institute of Piezoelectric and Acoustooptic Technology


For RF Filters (F-11 Package)

SP756


Electrical Characteristic:

Characteristic	Sym	Unit	Spec
Nominal Center Frequency	F_0	MHz	756
Stop Band Attenuation (from peak level)		dB	
1) at DC~570MHz			55min
2) at 570~690MHz			50min
3) at 880MHz~1000MHz			50min
Insertion Loss(at $F_0 \pm 16.0$ MHz)	IL	dB	4.5max
Passband variation (at $F_0 \pm 2.0$ MHz)		dB	1.5max
Input/Output Impedance (Nominal)			50 Ω

Input/Output Impedance(fig1):



F-11 Package(fig2):

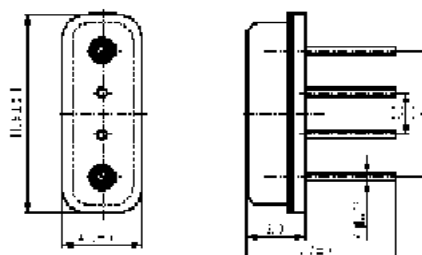

Frequency Characteristic(fig3):

