

### 1. PART NO. EXPRESSION :

SPI3020 - 1R5NZF - □ □  
 (a) (b) (c) (d)(e)(f) (g)

(a) Series code

(b) Dimension code

(c) Inductance code : 1R5 = 1.5uH


(d) Tolerance code : M = ±20%, N = ±30%

(e) Z : Standard part

(f) F : RoHS Compliant

(g) 11 ~ 99 : Internal controlled number

### 2. CONFIGURATION & DIMENSIONS :

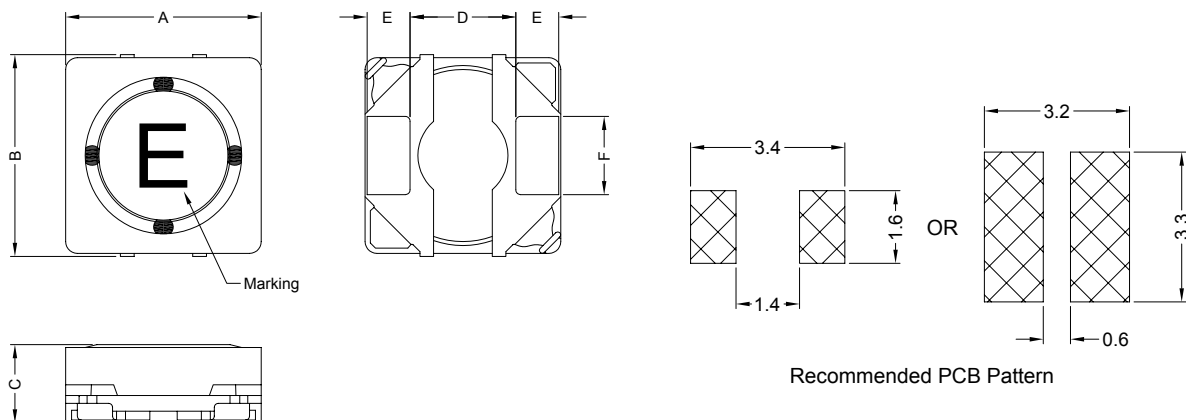

Unit:m/m

| A       | B       | C        | D       | E        | F       | G       |
|---------|---------|----------|---------|----------|---------|---------|
| 3.0±0.2 | 3.0±0.3 | 2.0 Max. | 2.1 Typ | 0.76 Typ | 1.2 Typ | 0.7 Typ |

### 3. MATERIALS :

- (a) Core : Ferrite
- (b) Wire : Polyurethane Enamelled Copper Wire
- (c) Terminal Clip : C5191
- (d) Adhesive : Epoxy
- (e) Ink : 70000-00101



### 4. GENERAL SPECIFICATION :



- a) IDC1 : Based on inductance change ( $\Delta L/L_0: \leq 30\%$ ) @ ambient temp. 25°C
- b) IDC2 : Based on temperature rise ( $\Delta T: 40^\circ\text{C Typ.}$ )
- c) Rated current : IDC1 or IDC2, whichever value is lower
- d) Storage temp. : -40°C to +105°C
- e) Operating temp. : -40°C to +105°C ( include self temp. rise )
- f) Resistance to solder heat : 260°C 10secs

### 5. ELECTRICAL CHARACTERISTICS :

| Part No.          | Inductance ( uH ) | Test Frequency ( Hz ) | RDC ( mΩ ) ±20% | IDC1 ( A ) | IDC2 ( A ) | Marking |
|-------------------|-------------------|-----------------------|-----------------|------------|------------|---------|
| SPI3020-1R5NZF-□□ | 1.5±30%           | 0.1V/100K             | 64              | 1.80       | 1.70       | C       |
| SPI3020-2R2NZF-□□ | 2.2±30%           | 0.1V/100K             | 87              | 1.40       | 1.45       | E       |
| SPI3020-3R3NZF-□□ | 3.3±30%           | 0.1V/100K             | 100             | 1.20       | 1.30       | G       |
| SPI3020-4R7MZF-□□ | 4.7±20%           | 0.1V/100K             | 150             | 1.00       | 1.15       | I       |
| SPI3020-6R8MZF-□□ | 6.8±20%           | 0.1V/100K             | 180             | 0.87       | 1.05       | K       |
| SPI3020-100MZF-□□ | 10±20%            | 0.1V/100K             | 240             | 0.60       | 0.85       | M       |
| SPI3020-470MZF-□□ | 47±20%            | 0.1V/100K             | 1410            | 0.32       | 0.35       | U       |
| SPI3020-680MZF-□□ | 68±20%            | 0.1V/100K             | 1640            | 0.27       | 0.30       | W       |



**6. RELIABILITY & TEST CONDITION :**
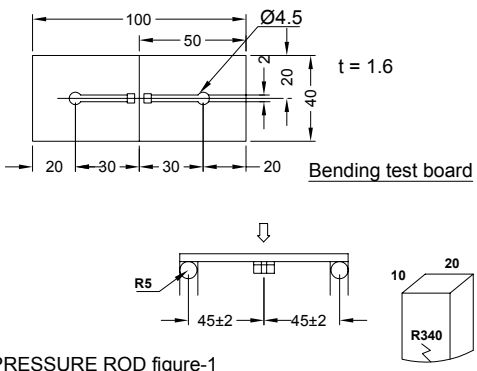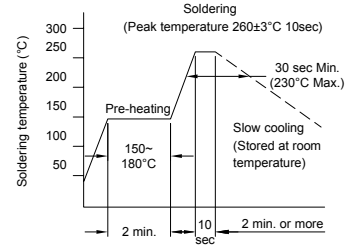
| ITEM  | PERFORMANCE   | TEST CONDITION  |
|---|---|---|
| Mechanical                                      |   |   |
| Substrate bending                               | $\Delta L/L_0 \leq \pm 10\%$<br><br>There shall be no mechanical damage or electrical damage. | The sample shall be soldered onto the printed circuit board in figure 1 and a load applied until the figure in the arrow direction is made approximately 3mm.(keep time 30 secs)<br><br><br>Bending test board<br><br>PRESSURE ROD figure-1   |
| Vibration                                       | $\Delta L/L_0 \leq \pm 10\%$<br><br>There shall be no mechanical damage.                      | The sample shall be soldered onto the printed circuit board and when a vibration having an amplitude of 1.52mm and a frequency of from 10 to 55Hz/1 minute repeated should be applied to the 3 directions (X,Y,Z) for 2 hours each. (A total of 6 hours)  |
| Solderability                                   | New solder<br>More than 90%   | Flux (rosin, isopropyl alcohol{JIS-K-1522}) shall be coated over the whole of the sample before hard, the sample shall then be preheated for about 2 minutes in a temperature of 130~150°C and after it has been immersed to a depth 0.5mm below for 3±0.2 seconds fully in molten solder M705 with a temperature of 245±5°C.<br><br>More than 90% of the electrode sections shall be covered with new solder smoothly when the sample is taken out of the solder bath. |
| Resistance to Soldering heat (reflow soldering) | There shall be no damage or problems.   | <br><br>The specimen shall be passed through the reflow oven with the condition shown in the above profile for 1 time.<br>The specimen shall be stored at standard atmospheric conditions for 1 hour, after which the measurement shall be made.  |


## 6. RELIABILITY & TEST CONDITION :

| ITEM                            | PERFORMANCE  | TEST CONDITION  |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |
|---------------------------------|--|---|--|-------------|----------|---|------------------------------|---------|---|----------------------|-----------------------------|---|-----------------------------|---------|---|----------------------|-----------------------------|
| Electrical Characteristics Test |  |   |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |
| Dielectric withstand voltage    | There shall be no damage or problems.                                      | AC 100V voltage shall be applied for 1 minute across the top surface and the terminal of this sample  |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |
| Temperature characteristics     | $\Delta L/L_{20^\circ C} \leq \pm 10\%$<br>0~2000 ppm/°C                   | The test shall be performed after the sample has stabilized in an ambient temperature of -20 to +85°C, and the value calculated based on the value applicable in a normal temperature and normal humidity shall be $\Delta L/L_{20^\circ C} \leq \pm 10\%$ .  |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |
| High temperature storage        | $\Delta L/L_0 \leq \pm 10\%$<br>There shall be no mechanical damage.       | The sample shall be left for 96±4 hours in an atmosphere with a temperature of 85±2°C and a normal humidity. Upon completion of the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.  |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |
| Low temperature storage         | $\Delta L/L_0 \leq \pm 10\%$<br>There shall be no mechanical damage.       | The sample shall be left for 96±4 hours in an atmosphere with a temperature of -25±3°C. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity for 1 hour.   |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |
| Change of temperature           | $\Delta L/L_0 \leq \pm 10\%$<br>There shall be no other damage of problems | The sample shall be subject to 5 continuous cycles, such as shown in the table 2 below and then it shall be subjected to standard atmospheric conditions for 1 hour, after which measurement shall be made. <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th></th> <th>Temperature</th> <th>Duration</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-25±3°C<br/>(Thermostat No.1)</td> <td>30 min.</td> </tr> <tr> <td>2</td> <td>Standard atmospheric</td> <td>5 sec. or less<br/>No.1→No.2</td> </tr> <tr> <td>3</td> <td>85±2°C<br/>(Thermostat No.2)</td> <td>30 min.</td> </tr> <tr> <td>4</td> <td>Standard atmospheric</td> <td>5 sec. or less<br/>No.2→No.1</td> </tr> </tbody> </table> |  | Temperature | Duration | 1 | -25±3°C<br>(Thermostat No.1) | 30 min. | 2 | Standard atmospheric | 5 sec. or less<br>No.1→No.2 | 3 | 85±2°C<br>(Thermostat No.2) | 30 min. | 4 | Standard atmospheric | 5 sec. or less<br>No.2→No.1 |
|                                 | Temperature  | Duration  |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |
| 1                               | -25±3°C<br>(Thermostat No.1)   | 30 min.   |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |
| 2                               | Standard atmospheric   | 5 sec. or less<br>No.1→No.2   |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |
| 3                               | 85±2°C<br>(Thermostat No.2)  | 30 min.   |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |
| 4                               | Standard atmospheric   | 5 sec. or less<br>No.2→No.1   |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |
| Moisture storage                | $\Delta L/L_0 \leq \pm 10\%$<br>There shall be no mechanical damage.       | The sample shall be left for 96±4 hours in a temperature of 40±2°C and a humidity(RH) of 90~95%. Upon completion of the test, the measurement shall be made after the sample has been left in a normal temperature and normal humidity more than 1 hour.  |  |             |          |   |                              |         |   |                      |                             |   |                             |         |   |                      |                             |




### 7. PACKAGING INFORMATION :

#### 7-1. Reel Dimension (mm)

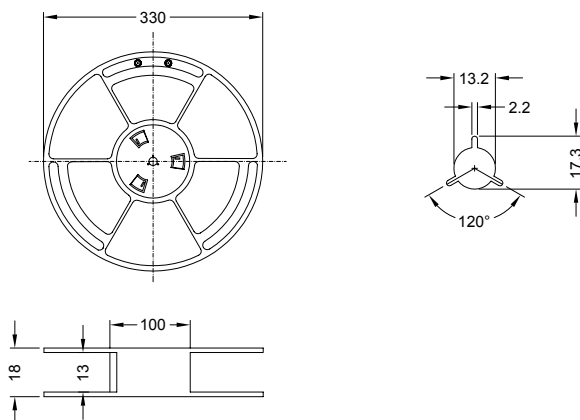


#### 7-2 CARRIER TAPE DIMENSIONS (mm)

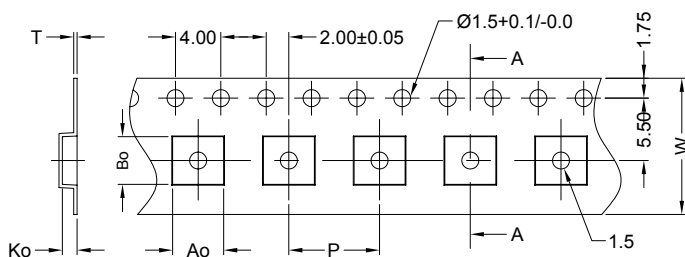

| Ao    | Bo    | Ko    | W    | P     | T     |
|-------|-------|-------|------|-------|-------|
| 3.5mm | 3.2mm | 2.4mm | 12mm | 8.0mm | 0.3mm |

#### 7-3 TAPING DIMENSIONS (mm)

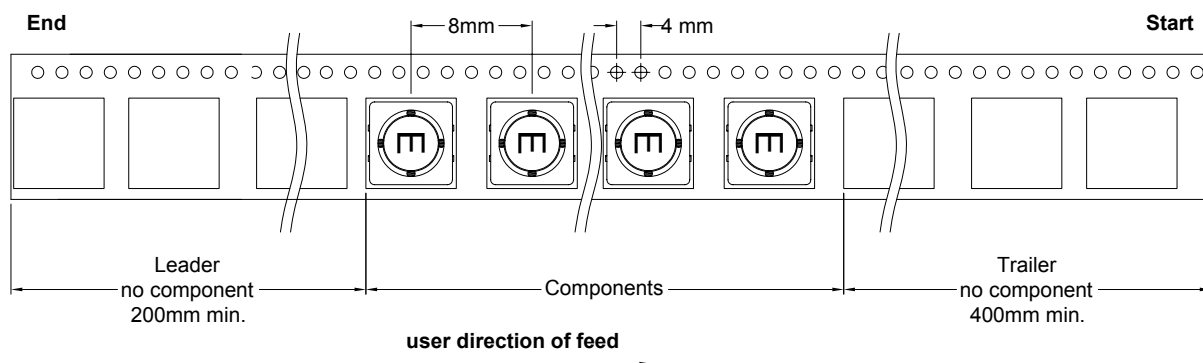

#### 7-4 QUANTITY

3000pcs/Reel

The products are packaged so that no damage will be sustained.

[www.DataSheet4U.com](http://www.DataSheet4U.com)



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

23.09.2010

 SUPERWORLD ELECTRONICS (S) PTE LTD

PG. 5

[www.DataSheet4U.com](http://www.DataSheet4U.com)