


Push Switch 1.5mm-travel Vertical Type

SPPH1 Series

www.DataSheet4U.com



Vertical type available with two lever shapes.

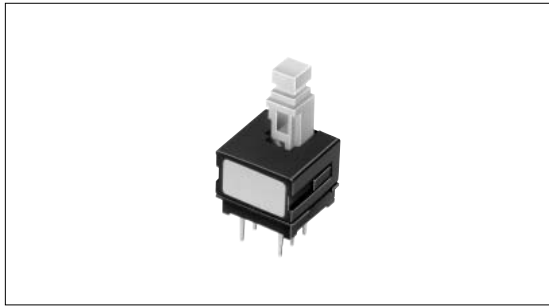

Typical Specifications

Items		Specifications
Rating (max.) (min.) (Resistive load)		0.1A 30V DC/50 μ A 3V DC
Contact resistance (Initial / After operating life)		20m max./40m max.
Operating force		Refer to the products line
Operating life	Without load	10,000cycles
	With load	10,000cycles(0.1A 30V DC)

Product Line

Changeover timing	Travel (mm)	Total travel (mm)	Rating	Mounting method	Poles	Operating force	Operation	Terminal type	Minimum order unit (pcs.)	Product No.	Drawing No.		
Non shorting	1.5	2.5		PC board	2	2 $\frac{1}{2}$ N	Latching	Straight	4,000	SPPH110800	1		
							Momentary					SPPH110300	
							Latching						SPPH120400
							Momentary						
							Latching	SPPH130400					
							Momentary			SPPH130100			
							Latching				SPPH140300		
							Momentary					SPPH140100	
						3 $\frac{1}{2}$ N	Latching	Straight	SPPH110900				1
								Snap-in		SPPH130500			
							Latching	Straight	SPPH140400		2		
								Snap-in					

Notes

1. Products other than those listed in the above chart are also available. Please contact us for details.
2. Please place purchase orders per minimum order unit (integer).

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products

Horizontal
Type


Vertical
Type

Dimensions

Unit:mm


No.	Style	PC board mounting hole dimensions (Viewed from the direction A)	
1		Straight terminal 	Snap-in terminal
		Straight terminal 	Snap-in terminal
2		Straight terminal 	Snap-in terminal
		Straight terminal 	Snap-in terminal

Circuit Diagram (Viewed from Direction A)

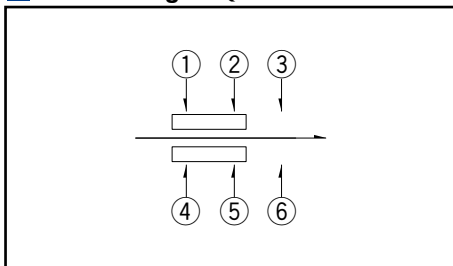





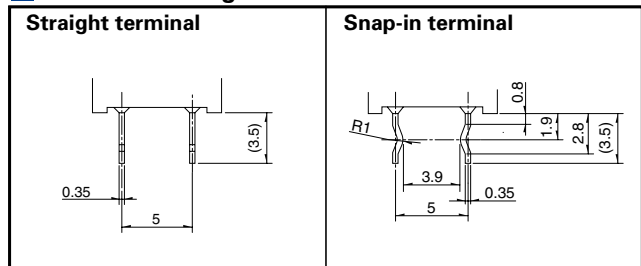




Terminal Configuration

Unit:mm



List of Varieties

Series		SPPH4	SPPH1	SPEC	SPED2	SPED3	SPED4	SPED5	SPEF		
Photo											
Travel (mm)		2.2	1.5	2.5					1.5		
Total travel (mm)		3	2.5	3.4	4.5	3.8		2.7			
Number of poles		2				1					
Dimensions (mm)	W	8.5	10	12	14			13.5	9.4		
	D	6.5	10		16.8	18		18.2	9		
	H	8.5		12.5	26.7	20.7			6.9		
Operating temperature range		- 10°C to + 60°C			- 40°C to + 85°C						
Rating (max.) Resistive load)		0.1A 30V DC				1A 14.5V DC					
Rating (min.) Resistive load)		50μA 3V DC									
Electrical performance	Initial contact resistance	100m max.	20m max.	30m max.	100m max.						
	Insulation resistance	100M min. 500V DC				3M min. 500V DC			3M min. 100VDC		
	Voltage proof	500V AC for 1minute				100V AC for 1minute					
Mechanical performance	Terminal strength	5N for 1minute		3N for 1minute							
	Actuator strength	Operating direction	30N	50N				90N			
Pulling direction		10N	50N						30N		
Durability	Operating life without load	10,000cycles 100m max.	10,000cycles 40m max.	10,000cycles 50m max.	30,000cycles 100m max.						
	Operating life without load Load:as rating										
Environmental performance	Cold	-20 ± 2 for 96h				-40 ± 2 for 96h					
	Dry heat	85 ± 2 for 96h									
	Damp heat	40 ± 2 , 90 to 95%RH for 96h									
Soldering	Manual soldering	350 ± 10 3 ⁺¹ 0s			350 ± 10 3 ± 0.5s	3	350 ± 10 3 ± 0.5s	350 ± 5 3s max.			
	Dip soldering	260 ± 5 5 ± 1s	260 ± 5 10 ± 1s	260 max. 5s max.	260 ± 5 10 ± 1s	3	260 ± 5 10 ± 1s	260 ± 5 10 ± 1s 4			
	Reflow soldering									Please see P.108	
Page		98	99	101	102	103		105			

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line Package Type

TACT Switch™

Custom-Products

Horizontal Type

Vertical Type

Push Switches Attached Parts107

Push Switches Products Caution109

Notes

3. Applicable to SPED220200(PC board type)only.
4. Applicable to SPEF110100 only.