

DATA SHEET

SPRC201A/SPRC202A

10 Functions Remote Control Encoder/Decoder Pairs

Preliminary

AUG. 30, 2002

Version 0.1

SUNPLUS TECHNOLOGY CO. reserves the right to change this documentation without prior notice. Information provided by SUNPLUS TECHNOLOGY CO. is believed to be accurate and reliable. However, SUNPLUS TECHNOLOGY CO. makes no warranty for any errors which may appear in this document. Contact SUNPLUS TECHNOLOGY CO. to obtain the latest version of device specifications before placing your order. No responsibility is assumed by SUNPLUS TECHNOLOGY CO. for any infringement of patent or other rights of third parties which may result from its use. In addition, SUNPLUS products are not authorized for use as critical components in life support devices/ systems or aviation devices/systems, where a malfunction or failure of the product may reasonably be expected to result in significant injury to the user, without the express written approval of Sunplus.



www.DataSheets.com

10-FUNCTIONS REMOTE CONTROL ENCODER/DECODER PAIRS

1. GENERAL DESCRIPTION


These two devices are designed for encoder and decoder as pairs in remote control applications. The SPRC201A is a remote control encoder that encodes 10 lines of binary information into serial bit-stream data. When any of the 10 lines of information is activated, RF will be enabled or an infrared transmission medium will transmit encoded bit-stream data. After the 10 lines of information become inactive, the SPRC201A will transmit additional five data frames to improve transmitting reliability.

In contrast, the SPRC202A is a remote control decoder, which decodes the received serial bit-stream data from the SPRC201A and interprets 10 lines of information as 10 bits output data to control the corresponding external component. The SPRC202A provides nine types of momentary and one toggle types of outputs. The SPRC202A will be activated only when two consecutive and equal frames are received.

2. FEATURES

- Operating voltage range: 2.0V - 5.5V
- Built-in R-oscillator (5% accuracy resistor needed).
- Low standby and operating current
 - $I_{STBY,SPRC201A} < 1.0\mu A$, R-oscillator stops
 - $I_{OPERATE,SPRC201A} < 100\mu A$, R-oscillator free run
 - $I_{OPERATE,SPRC202A} < 100\mu A$, R-oscillator free run
- Built-in Power On Reset
- 10 function I/O pins
 - 9 types of momentary outputs
 - 1 types of toggle outputs
- Variable frame rate by controlling external resistor
- Valid transmission indicator
- 14/16-pin PDIP package available for SPRC201A
- 16/18/20-pin PDIP package available for SPRC202A

3. BLOCK DIAGRAM

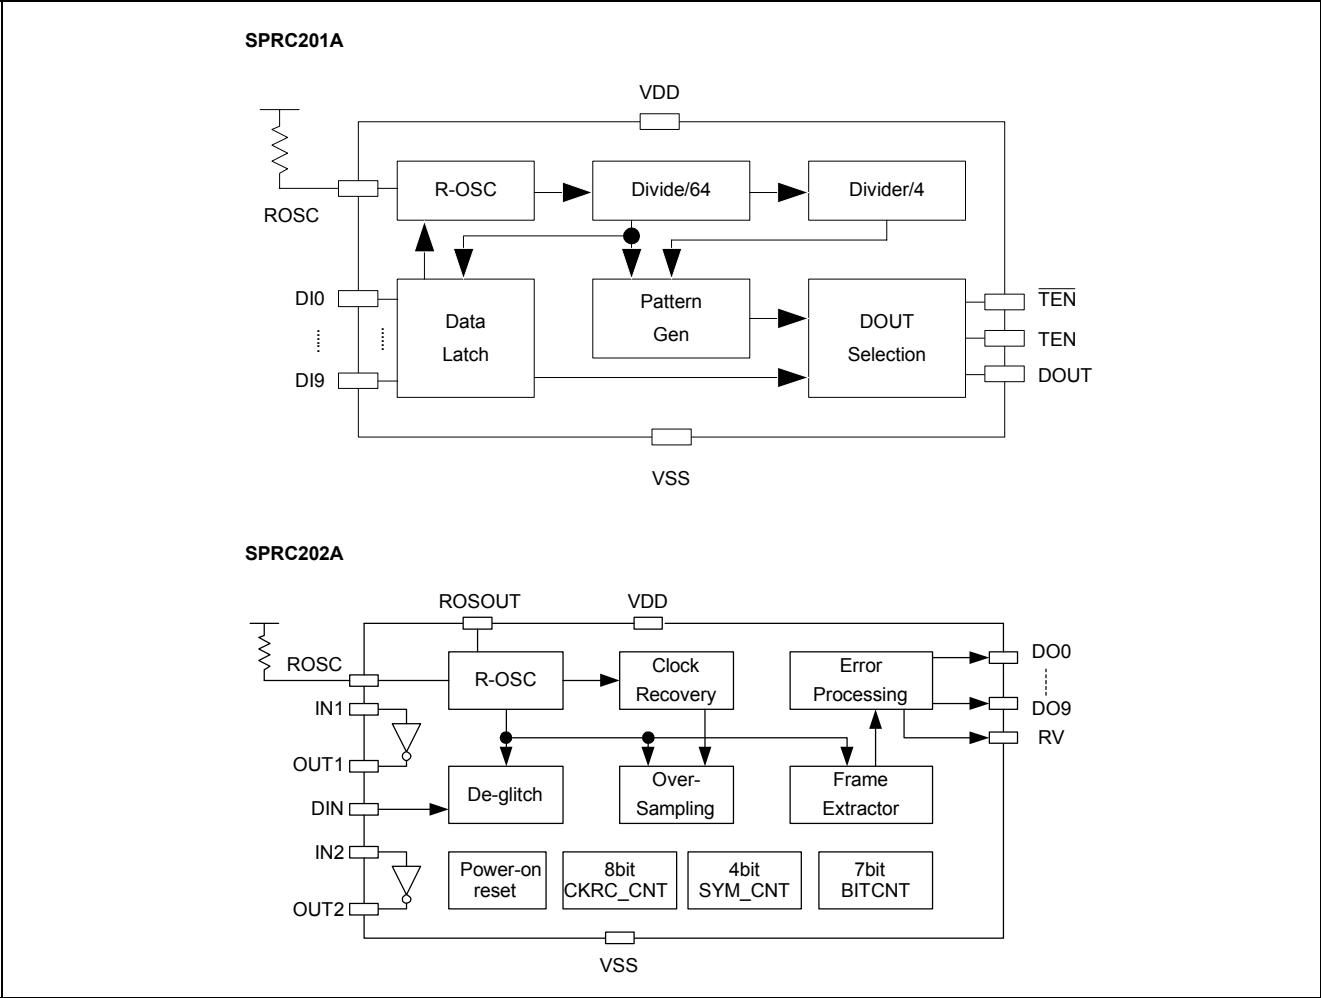

4. SIGNAL DESCRIPTIONS**4.1. PIN Description****4.1.1. SPRC201A**

Mnemonic	Type	PIN No.	Description
DI0	I	15	10-Function parallel data input
DI1		16	
DI2		2	
DI3		3	
DI4		4	
DI5		5	
DI6		10	
DI7		11	
DI8		13	
DI9		14	
DOUT	O	6	Serial bit stream data output
RESV		17	Reserving pin
TEN	O	8	Transmitting enable output for positive and negative polarity
TEN		9	
ROSC	I	12	R-oscillator input, connected to VDD through a resistor.
VDD	P	7	Power supply voltage input
VSS	P	1	Power supply ground input

4.1.2. SPRC202A


Mnemonic	Type	PIN No.	Description
DO0	I	4	10-Function parallel data output
DO1		5	
DO2		6	
DO3		8	
DO4		10	
DO5		11	
DO6		12	
DO7		13	
DO8		16	
DO9		17	
DIN	I	1	Serial bit-stream data input
RV	O	7	Receive valid indication output
ROSC	I	2	R-oscillator input, connect to VDD through a resistor.
ROSCOUT	O	3	R-oscillator clock output
IN1	I	14	Inverter input pins
IN2	I	18	
OUT1	O	15	Inverter output pins
OUT2	O	19	
VDD	P	9	Power supply voltage input
VSS	P	20	Power supply ground input

Legend: I = Input, O = Output, P = Power


4.2. PIN Configuration

4.2.1. SPRC201A

1). SPRC201A - PDIP 16

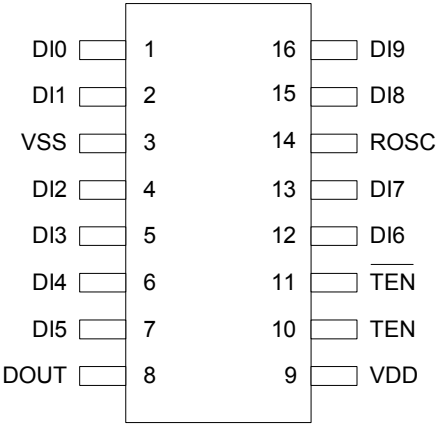


2). SPRC201A - PDIP 14

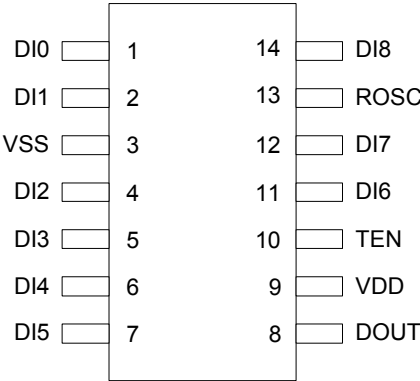


4.2.2. SPRC202A

1). SPRC202A - PDIP 16

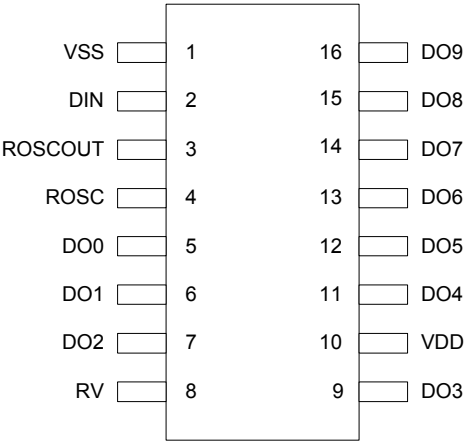


4.2.3. SPRC202A (with Super Regeneration Amplifier)

1). SPRC201A - PDIP 18

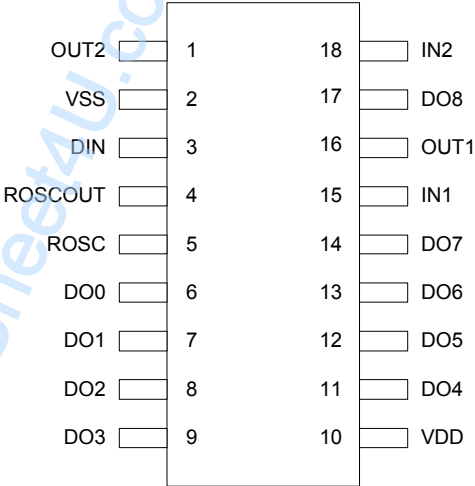

2). SPRC202A - PDIP 20

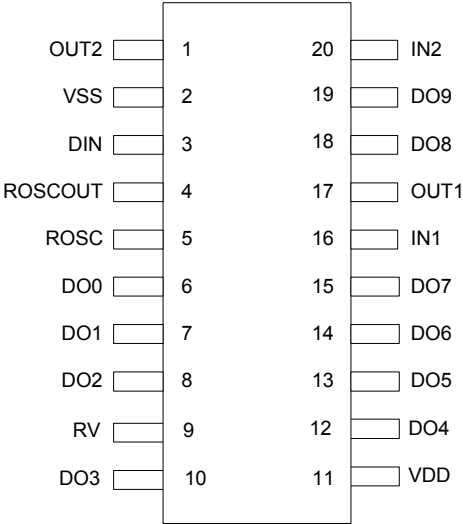



5. FUNCTIONAL DESCRIPTIONS

5.1. Frame Format


Preamble						PO	E	D0	D1	D2	D3	D4	D5	D6	D7	D8	D9
P	P	P	P	P	P	A/I	A/I	A/I	A/I	A/I	A/I	A/I	A/I	A/I	A/I	A/I	A/I

- Preamble field: 6 preamble fields
- PO field: Even parity check field
- E field: Frame polarity indication field, frame are transmitted in positive/negative order
- Data field: 10 data fields
- P pattern: encoded as 101
- A pattern: encoded as 100
- I pattern: encoded as 110

5.2. Operation


The SPRC201A encodes 10 function information into 2^{10} series of bit-stream data and asserts T_{EN} or $\overline{\text{TEN}}$ to enable RF or Infrared transmission media when any of the 10 function I/Os is active. Same procedures will be repeated until all 10 I/Os become


inactive. After these 10 I/Os become inactive, SPRC201A will transmit another five all-zero frames to inform SPRC202A turning back to disabled state. The transmitting timing is shown below:

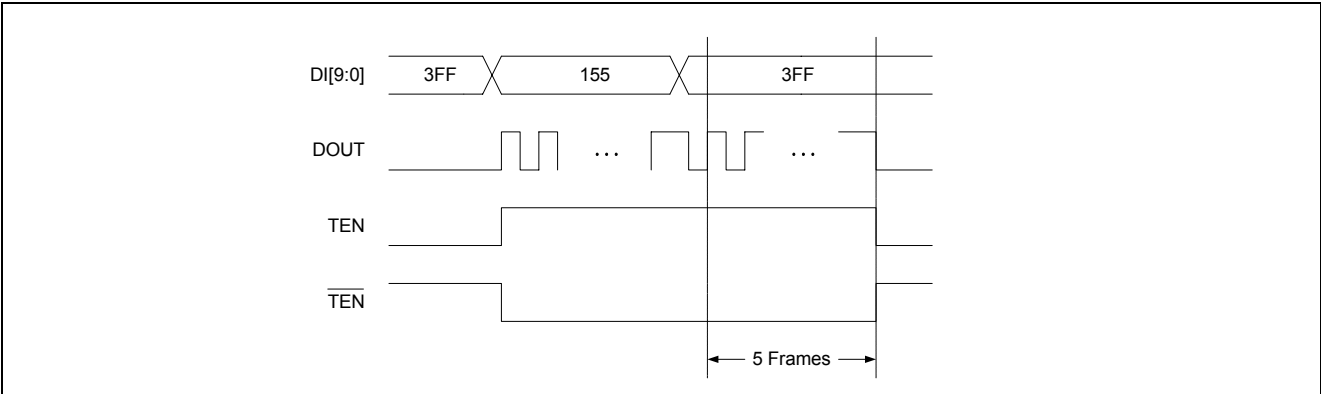

The SPRC202A receives serial bit-stream data (transmitted from SPRC201A) and decodes the data fields to a 10-bit data output. Any signal on DIN pin will activate SPRC202A to decode the incoming data. When SPRC202A receives two consecutive,

correct and equal frames, RV will be set to high to indicate a successful valid transmission, and DO [9:0] is activated to control the external component. The receiving timing is shown as follows:

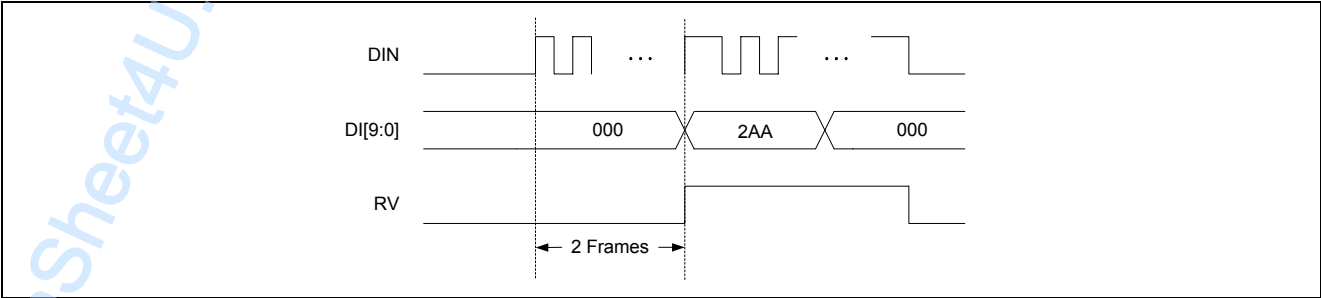

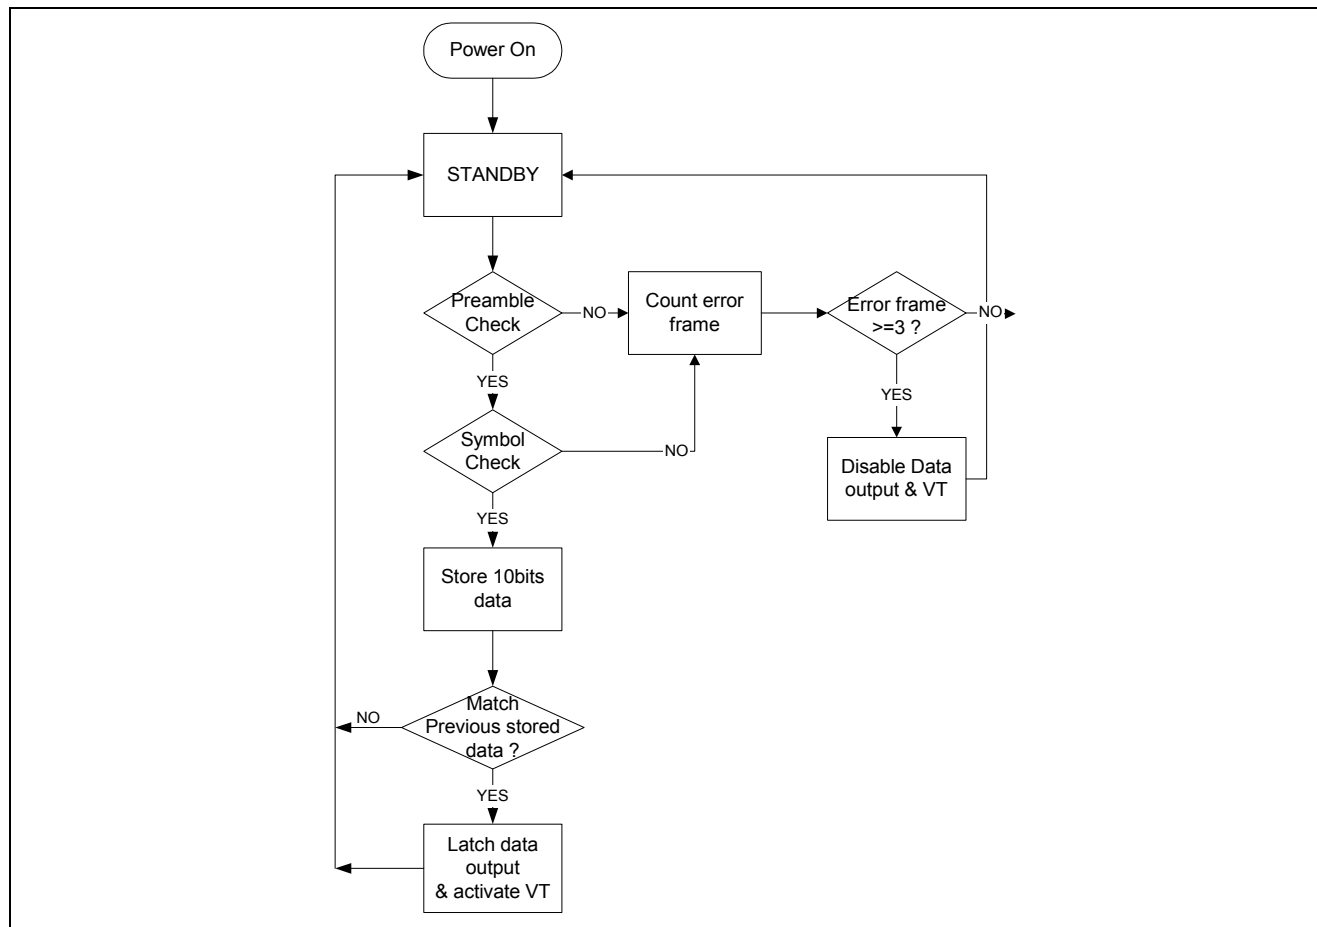5.3. Decoder Flow Chart

After Power on, the flow chart is reset at STANDBY state. When the signal on DIN is received, the SPRC202A will check the incoming data frame structure. If preamble or data field errors occur, the flow chart will go back to STANDBY state to check the next frames. If the receiving frame structures pass the preamble and symbol check, the 10-bits data is stored and compared to the previous stored 10-bits data. If the present data matches the previous one, DO[9:0] and RV are activated and the flow chart is back to STANDBY state to check the next frames.

5.4. R-oscillator


Both SPRC201A and SPRC202A have built-in R-oscillator. Users need only one resistor (or a capacitor if needed) to implement the clock input and to change the frame rate by replacing various resistors.

$$\text{Frame rate} = F_{\text{osc}} / 64 / 54$$

In addition, the SPRC202A has a clock recovery block to automatically adjust the ratio of data rate to clock rate. To meet the rigorous specification, only 5% accuracy resistor is allowed to be used in SPRC201A and SPRC202A.

5.5. Output Type

The SPRC202A offers up to 10 data output pins. Nine out of ten data outputs are momentary type (DO[9:1]) and the other one are toggle types (DO[0]). The momentary and toggle output timing is given as follows:

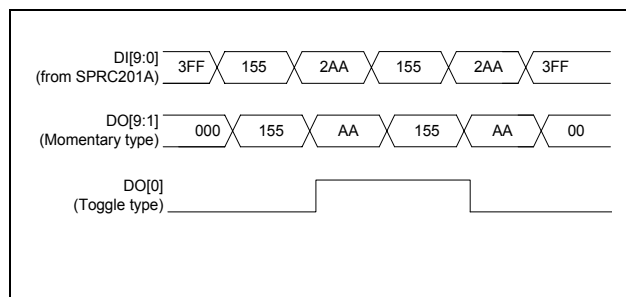**5.6. Super Regeneration Amplifier**

The SPRC202A also provides two inverter input and output as pins. The two inverters can be used for amplifier of the Super-Regeneration RF receiver data output. User can change the two inverters' gain by adjusting external resistor and capacitor.

6. ELECTRICAL SPECIFICATIONS

6.1. Absolute Maximum Ratings

Characteristics	Symbol	Ratings
DC Supply Voltage	V_+	$< 7.0V$
Input Voltage Range	V_{IN}	$-0.5V$ to $V_+ + 0.5V$
Operating Temperature	T_A	$-20^{\circ}C$ to $+60^{\circ}C$
Storage Temperature	T_{STO}	$-50^{\circ}C$ to $+150^{\circ}C$

Note: Stresses beyond those given in the Absolute Maximum Rating table may cause operational errors or damage to the device. For normal operational conditions see AC/DC Electrical Characteristics.

6.2. DC Characteristics of SPRC201A (VDD = 3.0V, $T_A = 25^{\circ}C$)


Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
Operating Voltage	VDD	2.0	-	5.5	V	R-OSC resistor = 200K Ω
Operating Current	I_{OP}	-	-	100	μA	R-OSC resistor = 200K Ω
Standby Current	$I_{STBY,SPRC201A}$	-	-	1.0	μA	R-OSC disable
Input High level	V_{IH}	2.0	-	-	V	VDD = 3.0V
Input Low level	V_{IL}	-	-	0.8	V	VDD = 3.0V
Output High Current (TEN, TEN, DOUT)	I_{OH}	-	-1.0	-	mA	VDD = 3.0V $V_{OH} = 2.4V$
Output Sink Current (TEN, TEN, DOUT)	I_{OL}	-	1.0	-	mA	VDD = 3.0V $V_{OL} = 0.4V$
DI[9:0] pull high resistor	R_{DI}	-	200	-	K Ω	VDD = 3.0V
OSC Frequency	F_{OSC}	-	128	-	KHz	$R_{OSC} = 200K\Omega$ @ VDD from 2.0V - 5.5V

6.3. DC Characteristics of SPRC202A (VDD = 3.0V, $T_A = 25^{\circ}C$)


Characteristics	Symbol	Limit			Unit	Test Condition
		Min.	Typ.	Max.		
Operating Voltage	VDD	2.0	-	5.5	V	R-OSC resistor = 200K Ω
Operating Current	I_{OP}	-	-	100	μA	R-OSC resistor = 200K Ω
Input High level	V_{IH}	2.0	-	-	V	VDD = 3.0V
Input Low level	V_{IL}	-	-	0.8	V	VDD = 3.0V
Output High Current (DO)	I_{OH}	-	-6.0	-	mA	VDD = 3.0V, $V_{OH} = 2.4V$
Output Sink Current (DO)	I_{OL}	-	6.0	-	mA	VDD = 3.0V, $V_{OL} = 0.4V$
Output High Current (RV)	I_{OH}	-	-1.0	-	mA	VDD = 3.0V, $V_{OH} = 2.4V$
Output Sink Current (RV)	I_{OL}	-	1.0	-	mA	VDD = 3.0V, $V_{OL} = 0.4V$
DIN pull low resistor	R_{DIN}	-	200	-	K Ω	VDD = 3.0V
OSC Frequency	F_{OSC}	-	128	-	KHz	$R_{OSC} = 200K\Omega$ @ VDD from 2.0V - 5.5V
Maximum tolerance data rate	$F_{TOR,MAX}$	2.4	-	-	KHz	$F_{OSC} = 128KHz$
Minimum tolerance data rate	$F_{TOR,MIN}$	-	-	1.6	KHz	$F_{OSC} = 128KHz$
Maximum rejection data rate	$F_{REJ,MAX}$	2.8	-	-	KHz	$F_{OSC} = 128KHz$
Minimum rejection data rate	$F_{REJ,MIN}$	-	-	1.3	KHz	$F_{OSC} = 128KHz$



6.4. The Relationships of the R_{OSC} and the F_{OSC}


6.4.1. VDD = 3.0V, T_A = 25°C

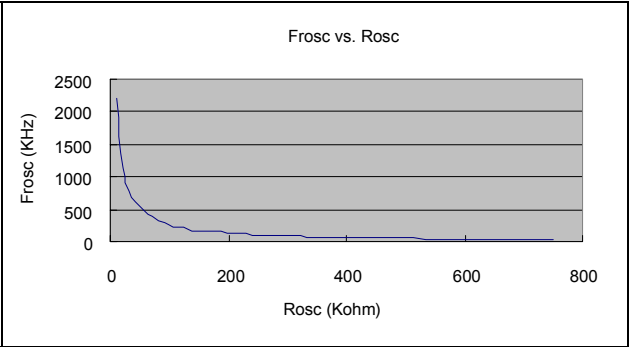

6.5. The Relationships of the VDD and the F_{OSC}

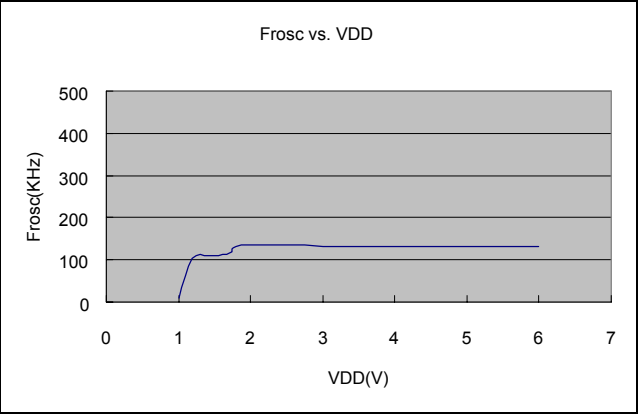

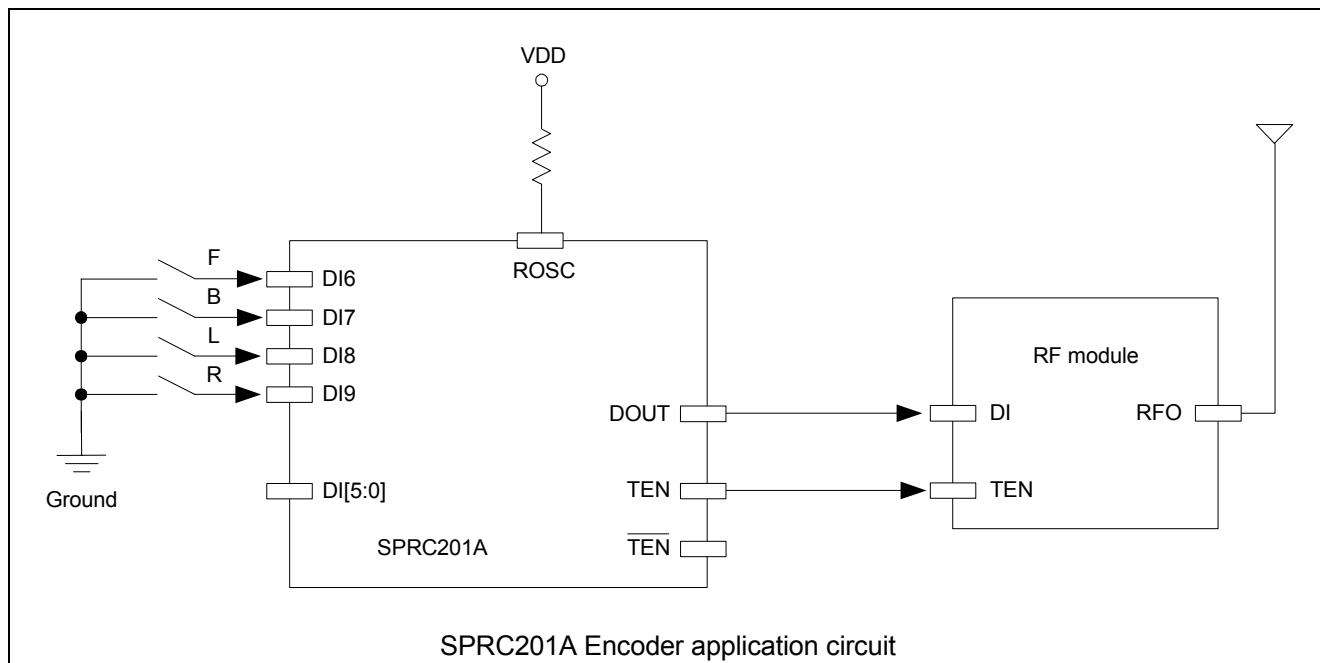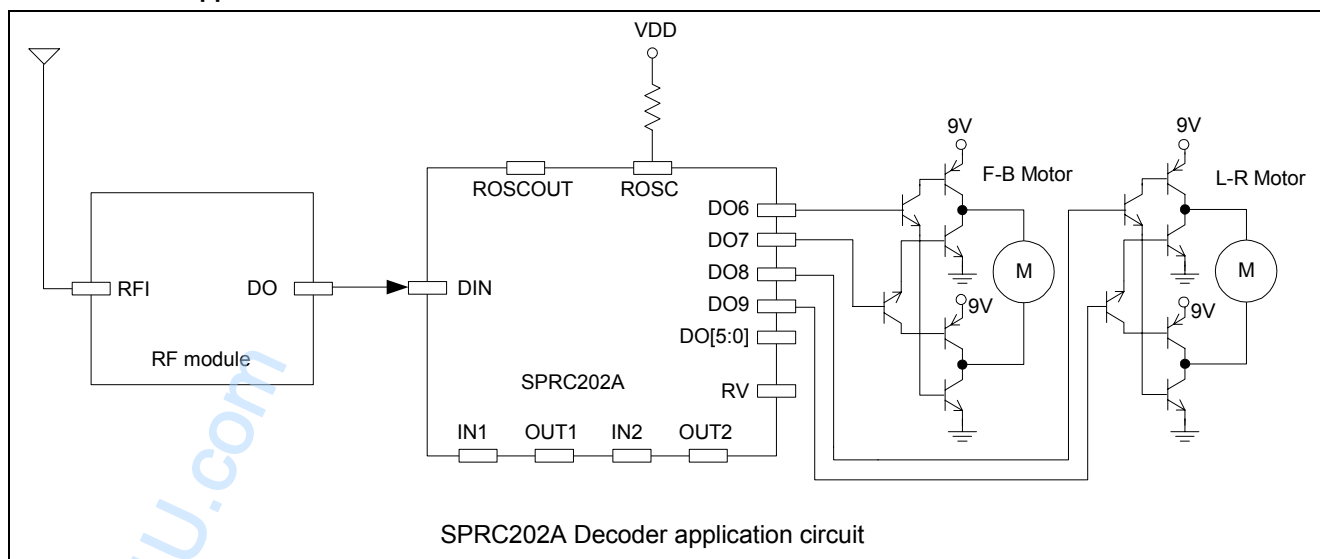
7. APPLICATION CIRCUITS**7.1. SPRC201A Application Circuit****7.2. SPRC202A Application Circuit**

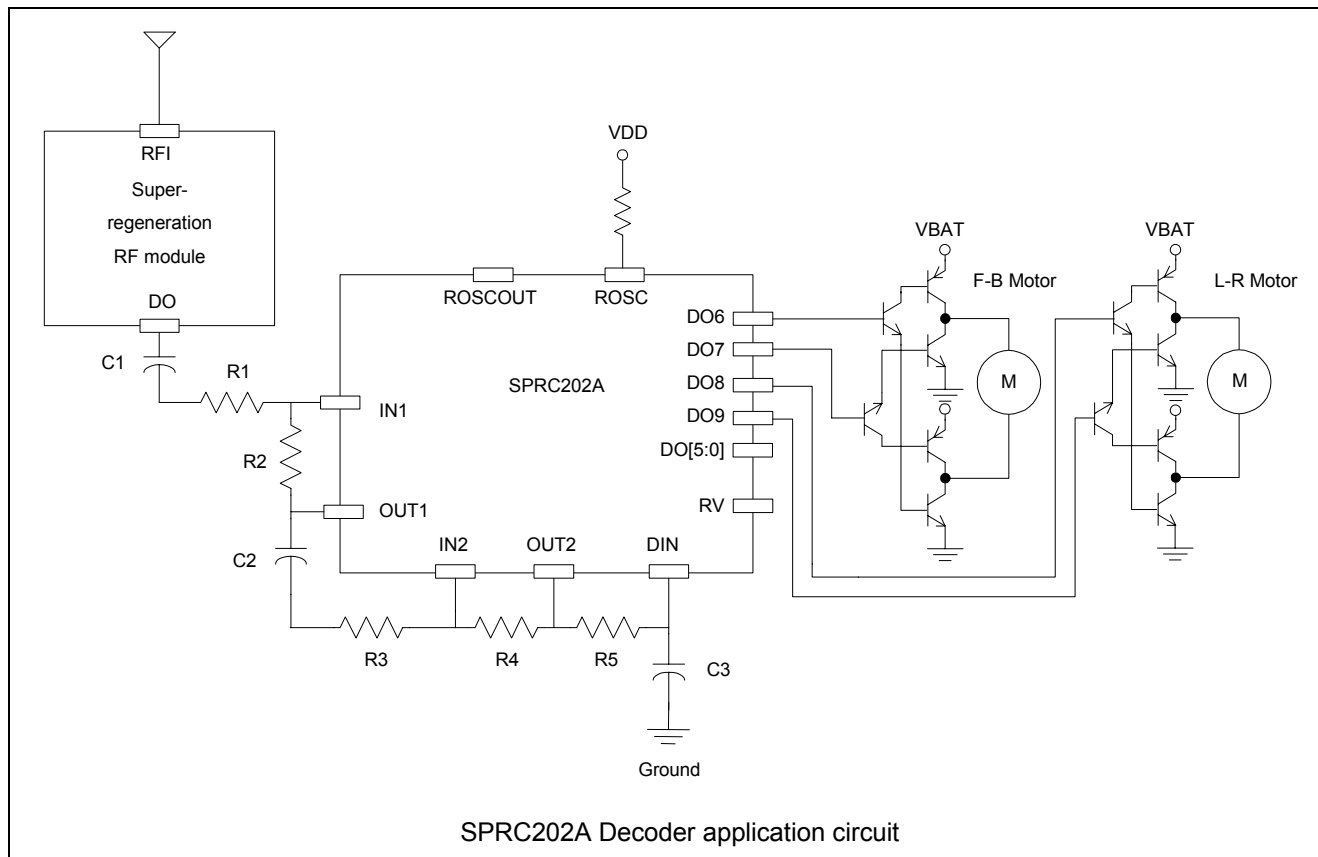7.3. SPRC202A Application Circuit (with Super Regeneration RF)


8. PACKAGE/PAD LOCATIONS


8.1. PAD Assignment

8.1.1. SPRC201A

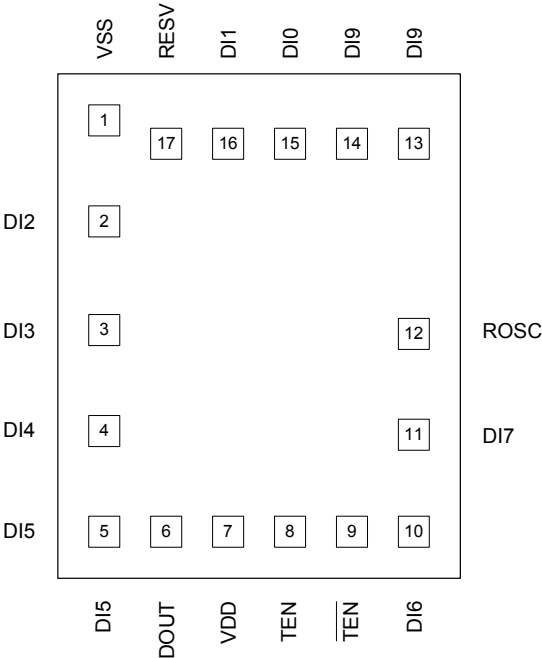

Chip Size : 890μm × 1130μm
This IC substrate should be connected to VSS

8.1.2. SPRC202A

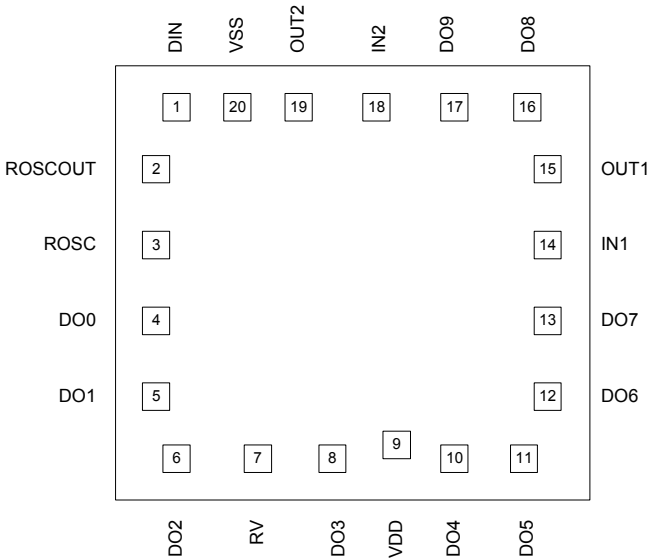

Chip Size : 1350μm × 1260μm
This IC substrate should be connected to VSS

- Note1:** Chip size included scribe line.
Note2: To ensure that the IC functions properly, please bond all of VDD and VSS pins.
Note3: The 0.1μF capacitor between VDD and VSS should be placed to IC as close as possible.

8.2. Ordering Information

Product Number	Package Type
SPRC201A - C	Chip form
SPRC202A - C	Chip form
SPRC201A - PD02	Package form - PDIP14
SPRC201A - PD03	Package form - PDIP 16
SPRC202A - PD03	Package form - PDIP16
SPRC202A - PD04	Package form - PDIP18
SPRC202A - PD05	Package form - PDIP20

8.3. PAD Locations**8.3.1. SPRC201A**


PAD No.	PAD Name	X	Y	PAD No.	PAD Name	X	Y
1	VSS	-314	439	11	DI7	312	-169
2	DI2	-316	270	12	ROSC	312	34
3	DI3	-316	34	13	DI8	319	385
4	DI4	-316	-169	14	DI9	193	385
5	DI5	-316	-404	15	DI0	68	385
6	DOUT	-190	-404	16	DI1	-58	385
7	VDD	-64	-404	17	RESV	-183	385
8	TEN	62	-404				
9	TEN	187	-404				
10	DI6	312	-404				

8.3.2. SPRC202A


PAD No.	PAD Name	X	Y	PAD No.	PAD Name	X	Y
1	DIN	-517	495	11	DO5	485	-515
2	ROSCOUT	-563	327	12	DO6	543	-331
3	ROSC	-563	91	13	DO7	543	-128
4	DO0	-563	-111	14	IN1	543	105
5	DO1	-563	-347	15	OUT1	543	308
6	DO2	-518	-515	16	DO8	485	495
7	RV	-282	-515	17	DO9	282	495
8	DO3	-79	-515	18	IN2	49	495
9	VDD	101	-484	19	OUT2	-153	495
10	DO4	282	-515	20	VSS	-335	495

8.4. Package Information


8.4.1. SPRC201A - PDIP 14

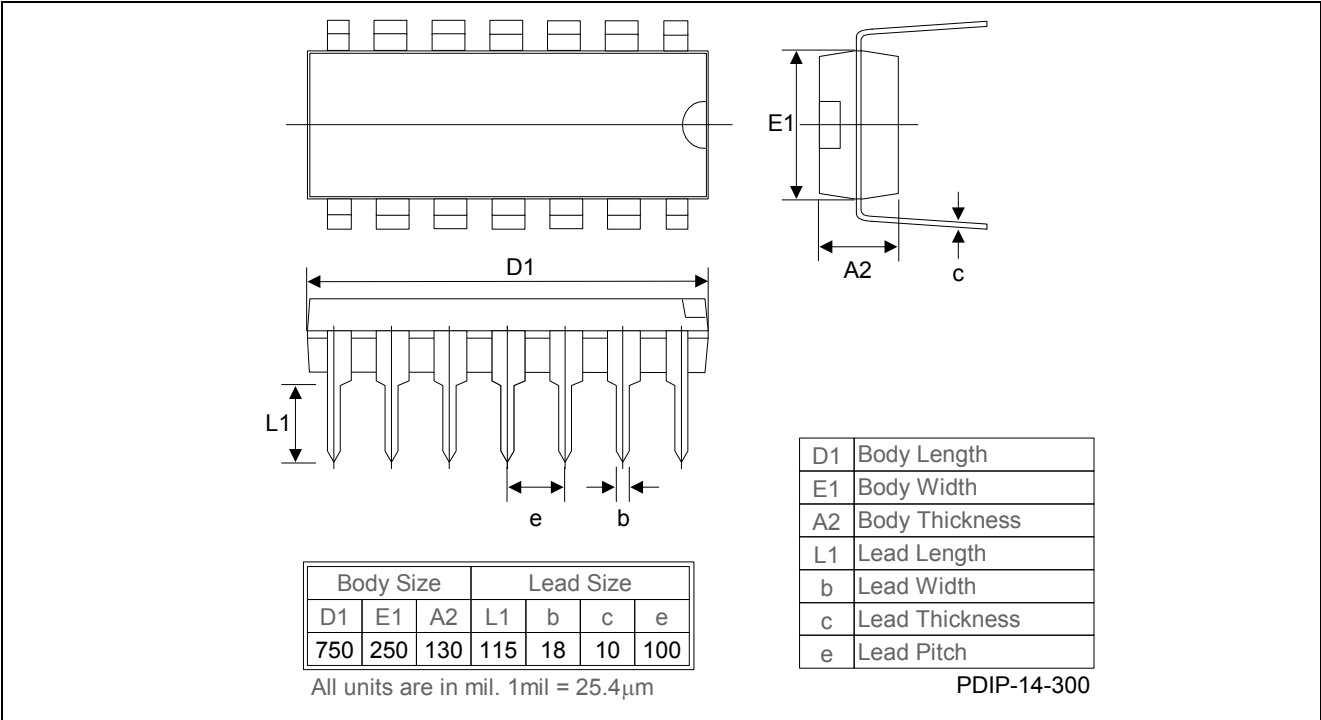


8.4.2. SPRC201A - PDIP 16

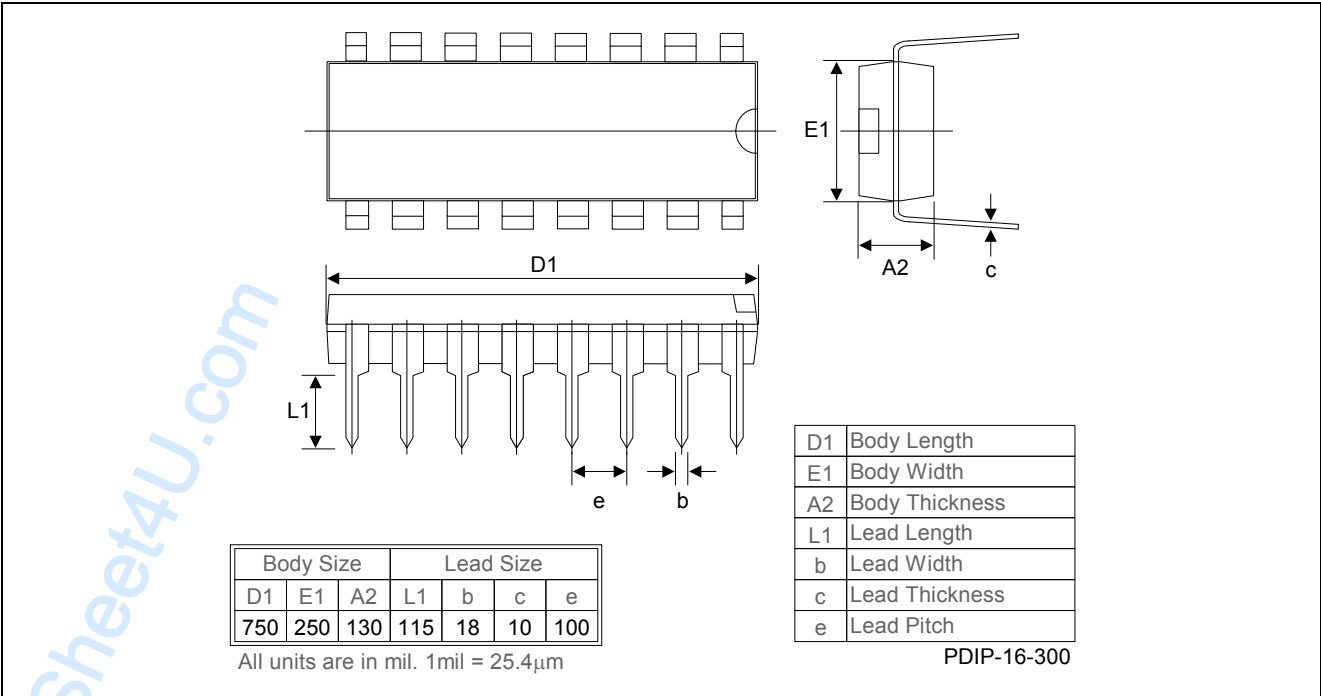


8.4.3. SPRC202A - PDIP 16

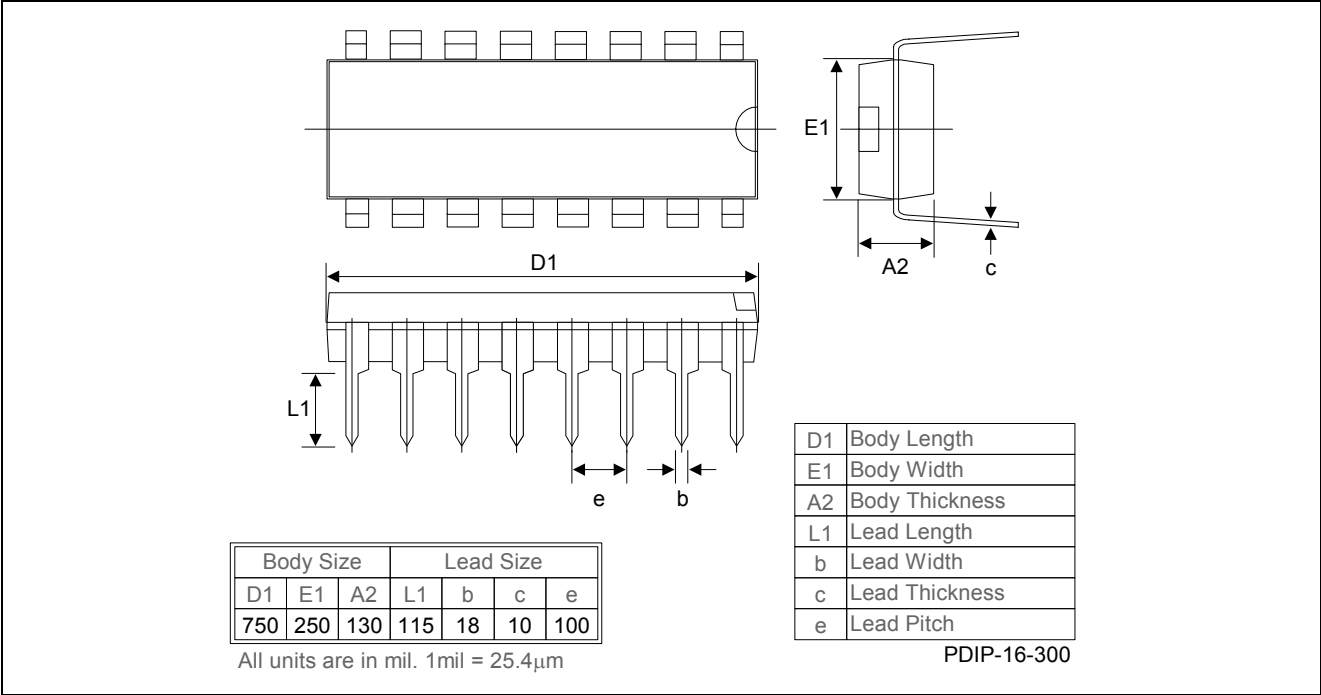

8.4.4. SPRC202A (with super regeneration amplifier) - PDIP 18

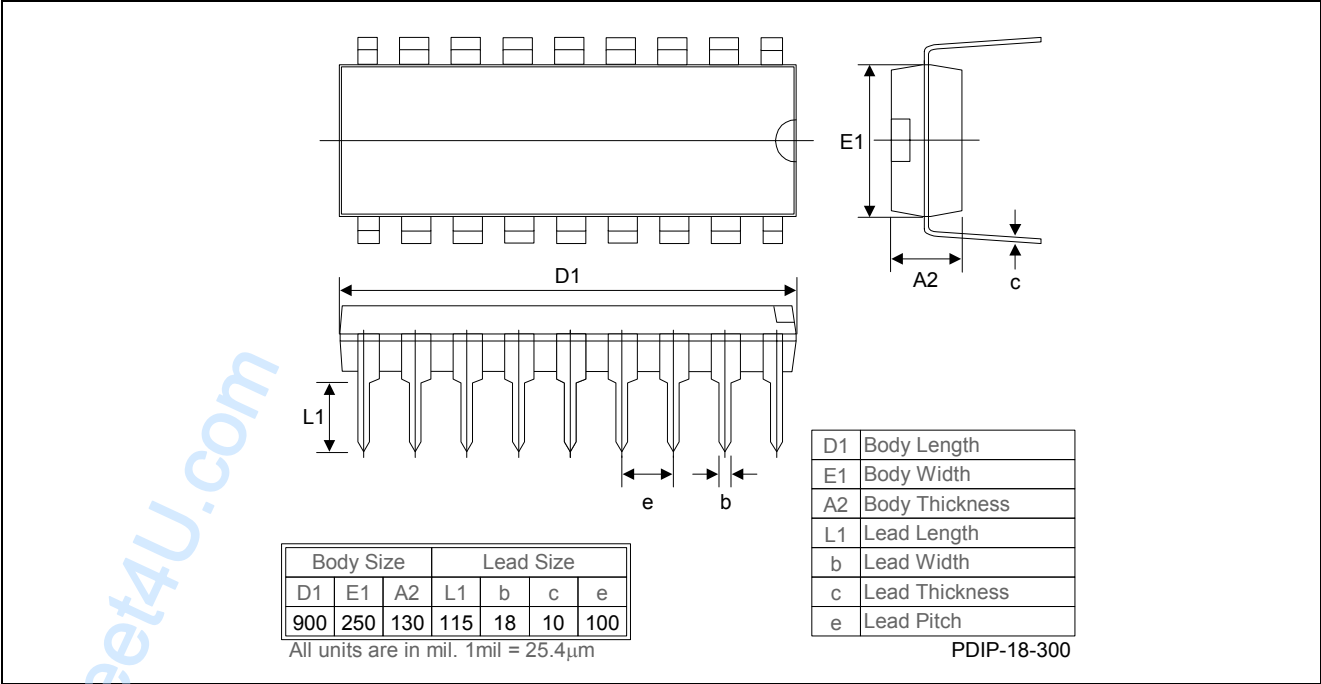

8.4.5. SPRC202A (with super regeneration amplifier) - PDIP 20

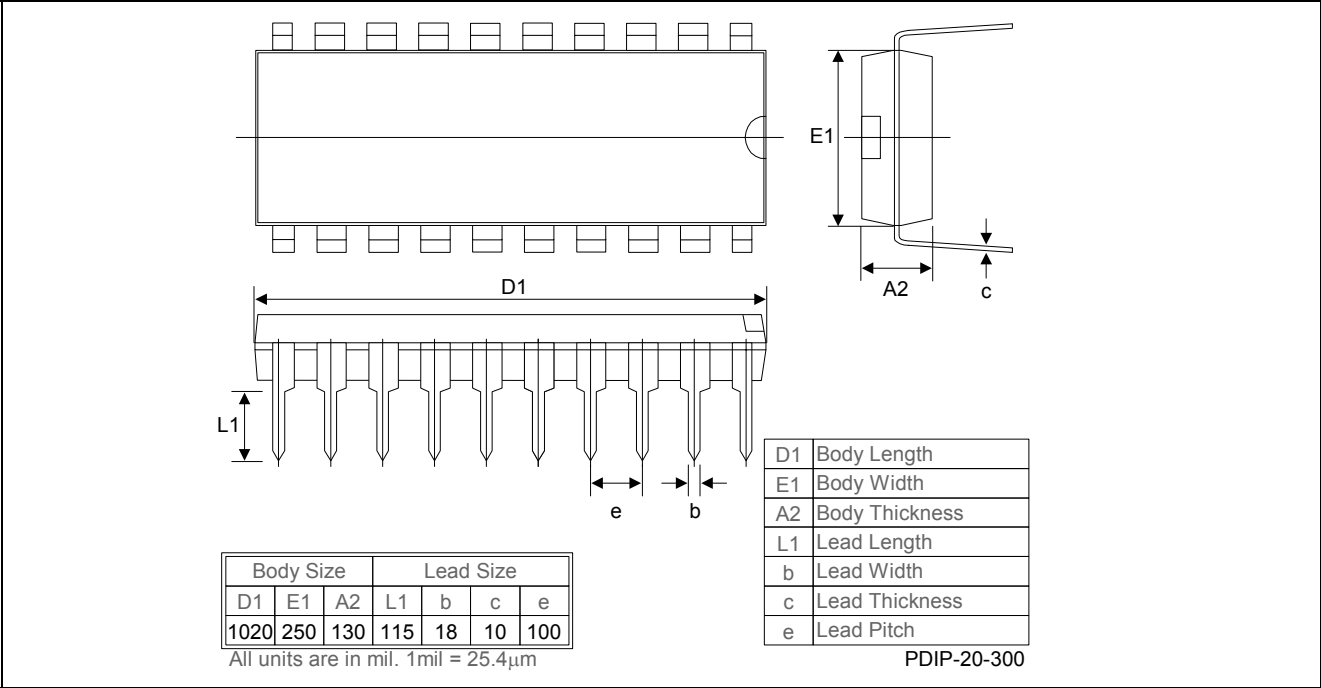

9. DISCLAIMER

The information appearing in this publication is believed to be accurate.

Integrated circuits sold by Sunplus Technology are covered by the warranty and patent indemnification provisions stipulated in the terms of sale only. SUNPLUS makes no warranty, express, statutory implied or by description regarding the information in this publication or regarding the freedom of the described chip(s) from patent infringement. FURTHERMORE, SUNPLUS MAKES NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE. SUNPLUS reserves the right to halt production or alter the specifications and prices at any time without notice. Accordingly, the reader is cautioned to verify that the data sheets and other information in this publication are current before placing orders. Products described herein are intended for use in normal commercial applications. Applications involving unusual environmental or reliability requirements, e.g. military equipment or medical life support equipment, are specifically not recommended without additional processing by SUNPLUS for such applications. Please note that application circuits illustrated in this document are for reference purposes only.

10. REVISION HISTORY

Date	Revision #	Description	Page
AUG. 30, 2002	0.1	Original	19