

Detector Switch Low-profile Tri-directional Operation Type

SPVL Series

www.DataSheet4U.com



Flexible and thin 1mm height detector switch with a large operational range of 180 degrees.

Detector

Push

Slide

Rotary


Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products

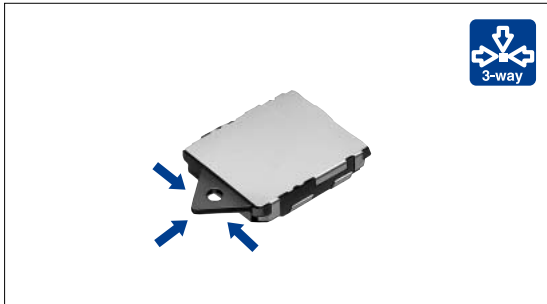

Typical Specifications

Items		Specifications
Rating (max.) (min.) (Resistive load)		1mA 5V DC/50μA 3V DC
Contact resistance (Initial/After operating life)		2 max./5 max.
Operating force		0.35N max.
Operating life	Without load	50,000cycles
	With load	50,000cycles(1mA 5V DC)


Product Line

Poles	Positions	Terminal type	Location lug	Minimum order unit(pcs)	Product No.
1	1	For PC board (Reflow)	With	20,000	SPVL110100
			Without		SPVL120100

Taping Specifications (Taping Packaging)

Reel Size


Unit:mm

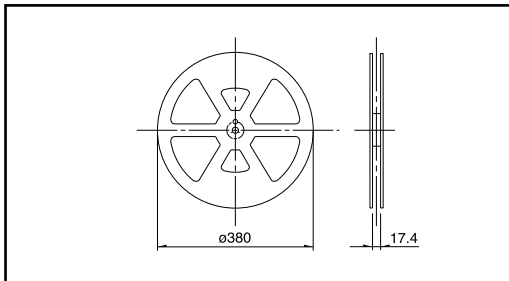


Number of packages(pcs.)			Tape width (mm)
1 reel	1 case /Japan	1 case /export packing	
5,000	10,000	20,000	16

Dimensions


Unit:mm

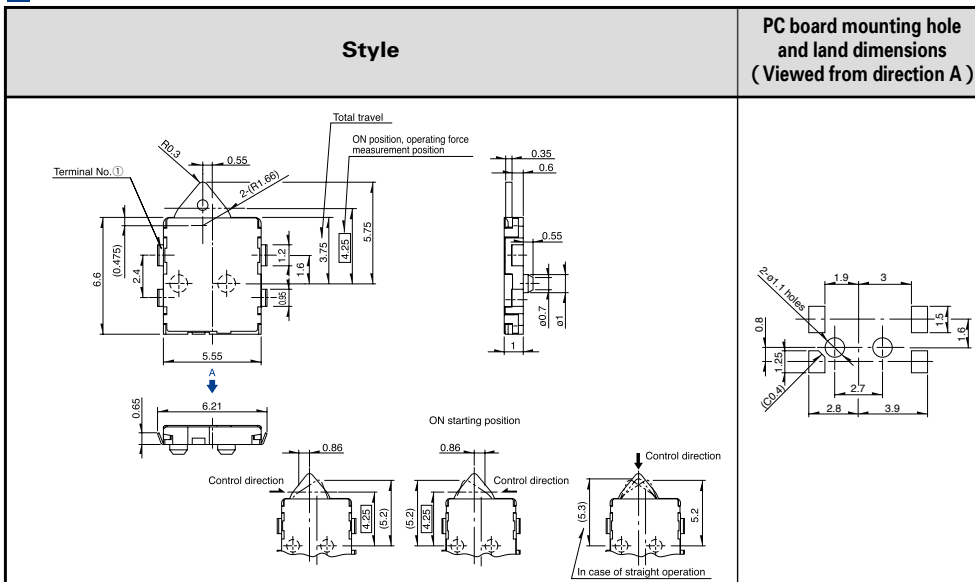

Terminal Layout (Viewed from Direction A)



Circuit Diagram



















Notes

- Above dimensions indicate "with Location lug" version.
- Please place purchase orders per minimum order unit(integer).

List of Varieties (General-purpose Type)

- Detector
- Push
- Slide
- Rotary
- Encoders
- Power
- Dual-in-line Package Type
- TACT Switch™
- Custom-Products


Series	General-purpose Type								
	SSCF	SSCM	SPVP	SPVC1	SPVN	SPVS	SPVG	SPVL	
Photo									
Operation type									
Operating temperature range	-40 to +85	-10 to +60	-40 to +85						
Rating (max.) (Resistive load)	0.1A 12V DC	1mA 5V DC		10mA 16V DC	1mA 5V DC		50mA 20V DC	1mA 5V DC	
Rating (min.) (Resistive load)	50µA 3V DC		100µA 3V DC	50µA 3V DC			100µA 3V DC	50µA 3V DC	
Electrical performance	Initial contact resistance	100m max.	2 max.	5 max.	1 max.	2 max.		500m max.	2 max.
	Insulation resistance	100M min. 100V DC							
	Voltage proof	100V AC for 1 minute							
Mechanical performance	Terminal strength	5N for 1 minute	0.5N for 1 minute		3N for 1 minute	0.5N for 1 minute		1N for 1 minute	
	Actuator strength	10N	0.5N	5N	10N	5N		10N	5N
Durability	Operating life without Load	50,000cycles 200m max.	50,000cycles 5 max.	50,000cycles 10 max.	25,000cycles 2 max.	50,000cycles 5 max.		100,000cycles 1 max.	50,000cycles 5 max.
	Operating life with Load	(0.1A 12V DC) 50,000cycles 300m max.	(1mA 5V DC) 50,000cycles 5 max.	(1mA 5V DC) 50,000cycles 10 max.	(10mA 16V DC) 25,000cycles 2 max.	(1mA 5V DC) 50,000cycles 5 max.		(50mA 20V DC) 100,000cycles 1 max.	(1mA 5V DC) 50,000cycles 5 max.
Environmental performance	Cold	-20 ± 2 for 96h						-40 ± 2 for 96h	-20 ± 2 for 96h
	Dry heat	85 ± 2 for 96h							
	Damp heat	40 ± 2 , 90 to 95%RH for 96h							
Dimensions (mm)	W	11	5	3.5	6.3	3.8	3.5	5.5	5.55
	D	5.8	4	5.65	7.4	3.6	3.3	6.5	6.6
	H	12.4	1.5	1.2	2.8	1		2	1
Soldering	Manual soldering	350 ± 10 , 3 ⁺¹ / ₀ s	350 ± 5 , 3s max.		350 ± 10 , 3 ⁺¹ / ₀ s	350 ± 5 , 3s max.			
	Dip soldering	260 ± 5 , 5 ± 1s			260 ± 5 , 3s max.				
	Reflow soldering	Please see P.79		Please see P.79					
Number of poles	1								
Operation force	0.7N max.	0.35N max.	0.55N max.	0.85N max.	0.35N max.		0.4N max.	0.35N max.	
Page	46	48	49	50	51	53	55	60	

Detector Switches Soldering Conditions79
 Detector Switches Cautions80

Soldering Conditions

Example of Reflow Soldering Condition

1. Heating method: Double heating method with infrared heater.
2. Temperature measurement: Thermocouple 0.1 to 0.2 CA (K) or CC (T) at soldering portion (copper foil surface). A heat resisting tape should be used for fixed measurement.
3. Temperature profile

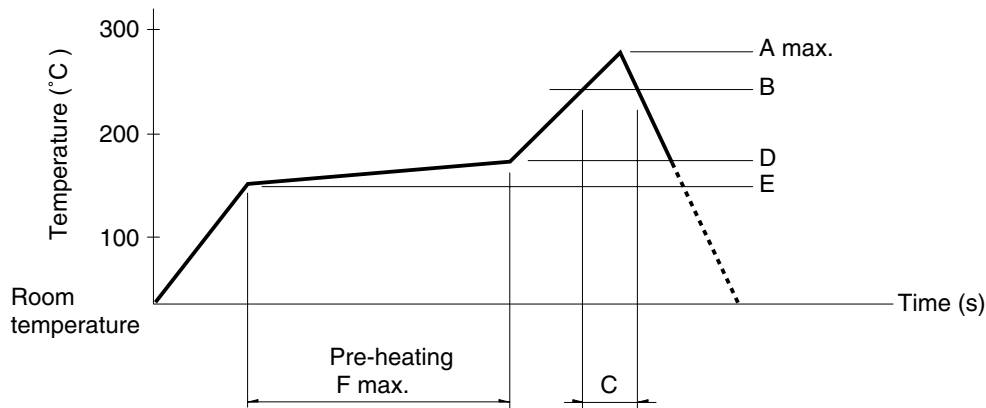

Detector

Push

Slide

Rotary

Encoders

Power

Dual-in-line
Package Type

TACT Switch™

Custom-
Products

Series(Reflow type)	A() 3s max.	B()	C(s)	D()	E()	F(s)
SPPB	250	230	40			
SPPW8		200	20			
SPVE	260	230	40	180	150	120
SPVG						
SPVL						
SPVM						
SPVN						
SPVP						
SPVR						
SPVS						
SSCM						
SPPY5						

Notes

1. The condition mentioned above is the temperature on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, depending on the PC board's material, size, thickness, etc. The above-stated conditions shall also apply to switch surface temperatures.
2. Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.