



DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

SQ1230
THRU
SQ12100

TECHNICAL SPECIFICATIONS OF SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE - 30 to 100 Volts

CURRENT - 12 Amperes

FEATURES

- * Low power loss
- * Low forward voltage
- * High current capability
- * High efficiency
- * High surge capability
- * Guard ring for transient protection
- * For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications

MECHANICAL DATA


- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: MIL-STD-202E, Method 208 guaranteed
- * Polarity: Color band denotes cathode end
- * Mounting position: Any
- * Weight: 1.18 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.



DO-27

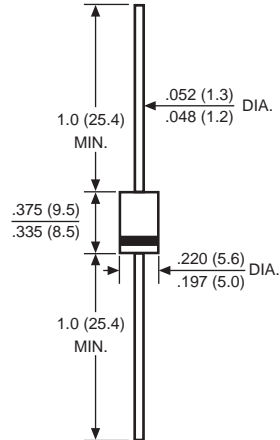

Dimensions in inches and (millimeters)

	SYMBOL	SQ1230	SQ1235	SQ1240	SQ1245	SQ1250	SQ1260	SQ1280	SQ12100	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	30	35	40	45	50	60	80	100	Volts
Maximum RMS Voltage	V _{RMS}	21	24.5	28	31.5	35	42	56	70	Volts
Maximum DC Blocking Voltage	V _{DC}	30	35	40	45	50	60	80	100	Volts
Maximum Average Forward Rectified Current .375*(9.5mm) lead length	I _o	12								Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	275								Amps
Maximum Instantaneous Forward Voltage at 12A DC	V _F	.55			.70		.80			Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	@ T _A = 25°C	0.5					mAmps			
	@ T _A = 100°C	50								
Typical Thermal Resistance (Note 1)	R _{θJC}	3.0					°C/W			
Typical Junction Capacitance (Note 2)	C _J	450					pF			
Storage and Operating Temperature Range	T _J , T _{STG}	-55 to +200					°C			

- NOTES : 1. Thermal Resistance Junction to case.
2. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

RATING AND CHARACTERISTIC CURVES (SQ1230 THRU SQ12100)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

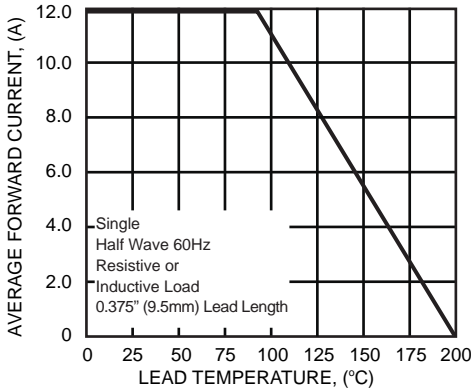


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

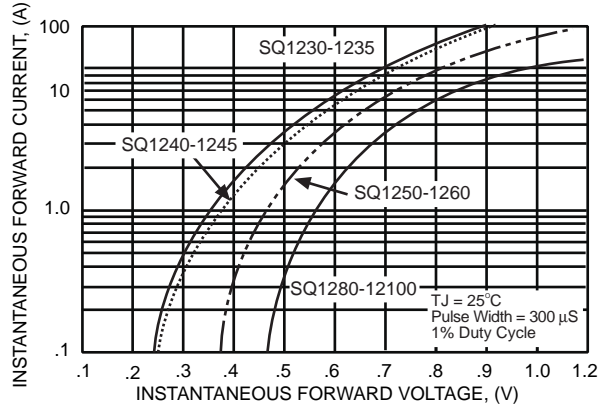


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

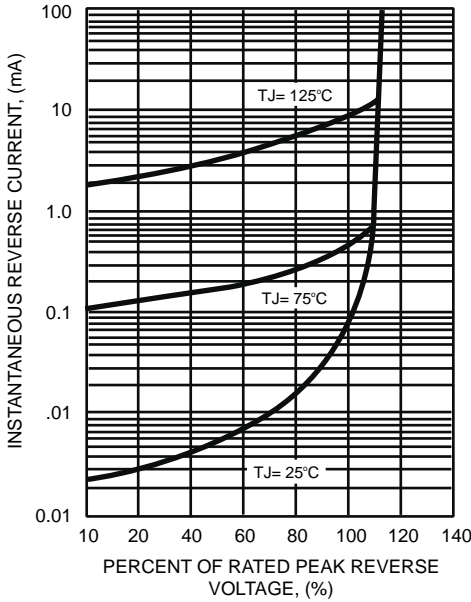


FIG. 4 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

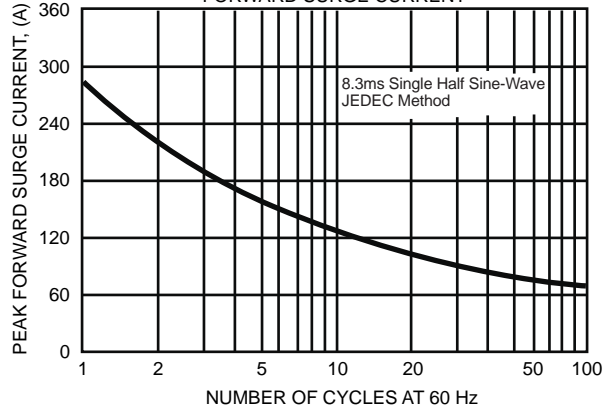


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

