

SR120 THRU SR1200

SCHOTTKY BARRIER RECTIFIER

REVERSE VOLTAGE 20 to 200 Volts FORWARD CURRENT 1.0 Ampere


FEATURES

- ◆ Low forward voltage drop
- ◆ Low leakage current
- ◆ High forward surge capability
- ◆ High temperature soldering guaranteed:
260°C/10 seconds, 0.375" (9.5mm) lead length at
5 lbs(2.3kg) tension

Mechanical Data

- ◆ Case: Mold plastic
- ◆ Epoxy: UL94V-0 rate flame retardant
- ◆ Polarity: Indicated by cathode band
- ◆ Lead: Plated axial lead, solderable per
MIL-STD-202E method 208°C
- ◆ Mounting position: Any

DO-41

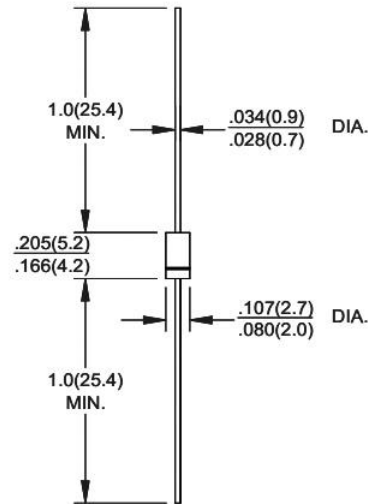

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%

	SYMBOL	SR 120	SR 130	SR 140	SR 150	SR 160	SR 180	SR 1100	SR 1150	SR 1200	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	80	100	150	200	Volts
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	56	70	105	140	Volts
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	80	100	150	200	Volts
Maximum Average Forward Rectified Current	$I_{(AV)}$	1.0									Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method)	I_{FSM}	30									Amps
Maximum Instantaneous Forward Voltage at 1.0A	V_F	0.55		0.70		0.85		0.90			Volts
Maximum DC Reverse Current $T_A=25^\circ\text{C}$ at rated DC Blocking voltage $T_A=100^\circ\text{C}$	I_R	0.5 10									mA
Typical Thermal Resistance (NOTE 1)	$R_{\theta JA}$	50									°C/W
Operating Temperature Range	T_J	-55 to +125									°C
Storage Temperature Range	T_{STG}	-55 to +150									°C

Note: 1. Thermal Resistance from Junction to Ambient at $5.0 \times 5.0 \text{mm}^2$ copper pad areas.

SR120 THRU SR1200

SCHOTTKY BARRIER RECTIFIER

REVERSE VOLTAGE 20 to 200 Volts FORWARD CURRENT 1.0 Ampere

RATING AND CHARACTERISTIC CURVES SR120 THRU SR1200

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

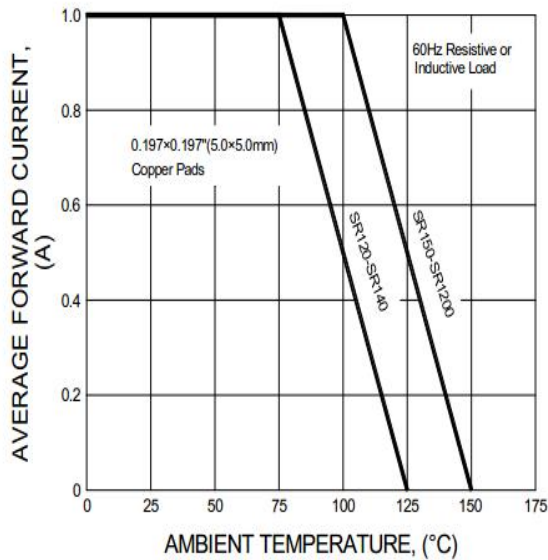


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

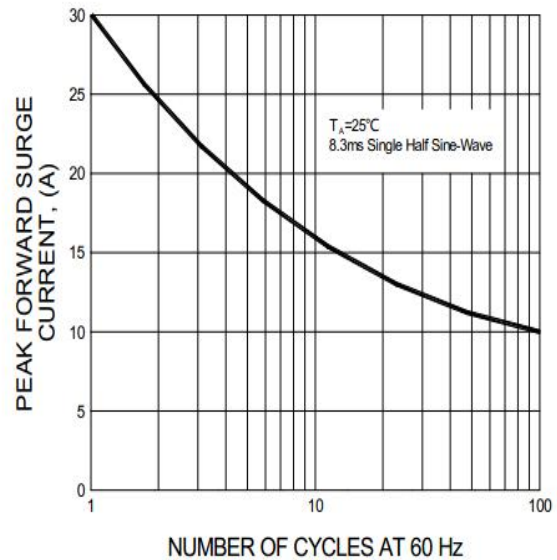


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


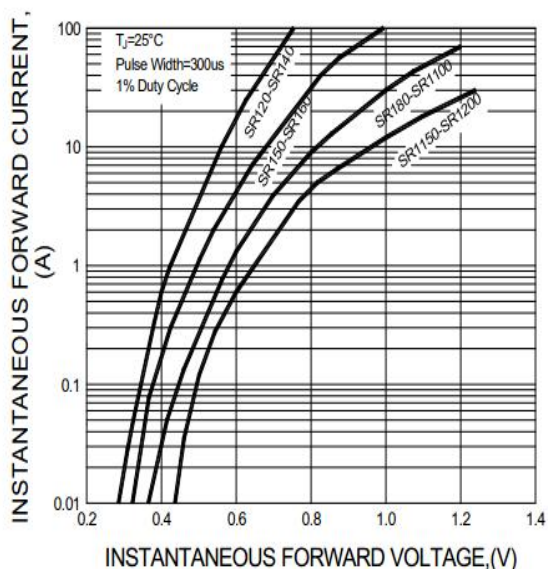


FIG.4-TYPICAL REVERSE CHARACTERISTICS

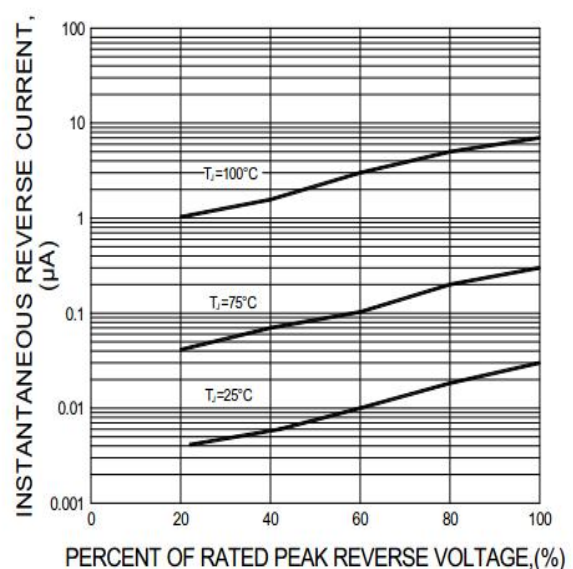

Note: Specifications are subject to change without notice. For more detail and update, please visit our website.