



This product is obsolete.

This information is available for your convenience only.

For more information on Zarlink's obsolete products and replacement product lists, please visit http://products.zarlink.com/obsolete_products/

SR12D

1.2V PRECISION VOLTAGE REFERENCE

The SR12D is a monolithic integrated circuit using the bandgap principle to provide a precise reference voltage of 1.23V.

This reference device is packaged in a standard SOT-23 small outline package, making it ideal for all surface mount applications.

FEATURES

- Standard SOT-23 Surface Mount Package
- Low Knee Current - Typically 80 μ A
- Low temperature Coefficient

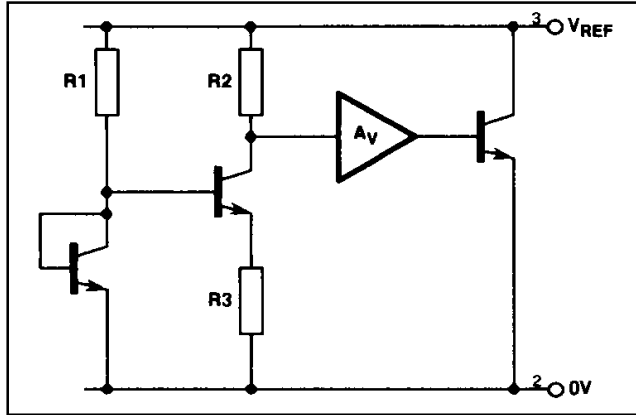


Fig.2 SR12D circuit diagram

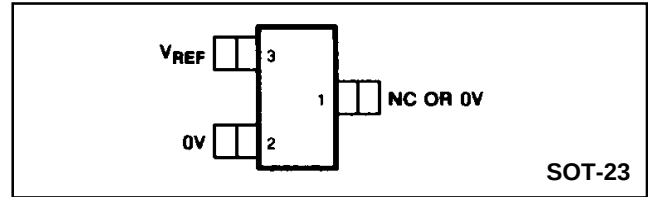


Fig. 1 Pin connections (top view)

ABSOLUTE MAXIMUM RATINGS

Reference current	2.5mA
Operating temperature range	-40°C to + 85°C
Storage temperature range	-55°C to +125°C

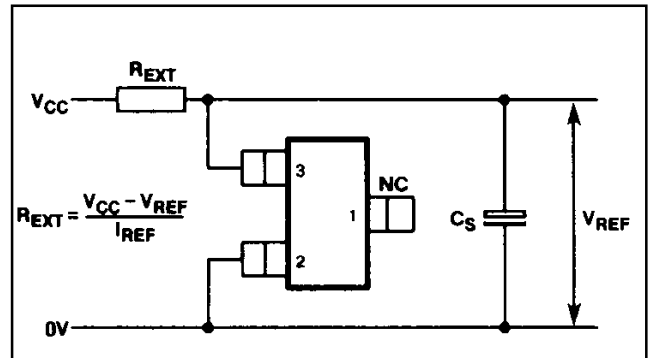


Fig.3 SR12D external connections.

NOTE: In order to achieve optimum operation, an electrolytic stabilising capacitor ($C_s \geq 1\mu$ F) should be connected between V_{REF} and 0V as shown in Fig. 3.

ELECTRICAL CHARACTERISTICS

These characteristics are guaranteed over the following conditions (unless otherwise stated):

$T_{amb} = +25^\circ\text{C}$, $I_{REF} = 150\mu\text{A}$, $C_s = 1\mu\text{F}$

Characteristic	Symbol	Value			Units	Conditions
		Min.	Typ.	Max.		
Output voltage	V_{REF}	1.193	1.230	1.267	V	$I_{REF} = 150\mu\text{A}$ to 2.5mA
Slope resistance (see note 1)	R_{REF}		1.5	2.5	Ω	
Turn-on (knee) current	I_{ON}		80	90	μA	
Recommended operating current range	I_{REF}	0.09		2.5	mA	
Temperature coefficient (see note 2)	TCV_{REF}		40	125	ppm/ $^\circ\text{C}$	
			40	120	ppm/ $^\circ\text{C}$	0°C to $+70^\circ\text{C}$ -40°C to $+85^\circ\text{C}$ 1Hz to 25kHz
RMS noise voltage	E_N		10		μV	
Turn on time	t_{ON}		7		ms	
Turn off time	t_{OFF}		24		ms	
Turn on time	t_{ON}		0.4		ms	} $I_{REF} = 5\text{mA}$
Turn off time	t_{OFF}		1.8		ms	

NOTES

1. Slope Resistance (R_{REF})

The slope resistance is defined as

$$R_{REF} = \frac{\text{Change in } V_{REF} \text{ over specified current range}}{\text{The change in reference current}}$$

2. Reference Voltage Temperature Coefficient (TCV_{REF})

This is the normalised reference voltage change over temperature, divided by the change in temperature. It is expressed in ppm/°C as follows:

$$TCV_{REF} = \frac{\Delta V_{REF} \times 10^6}{V_{REF} \times \Delta T} \text{ ppm/}^\circ\text{C}$$

ΔT = temperature change in °C

ΔV_{REF} = change in reference voltage over temperature change ΔT .

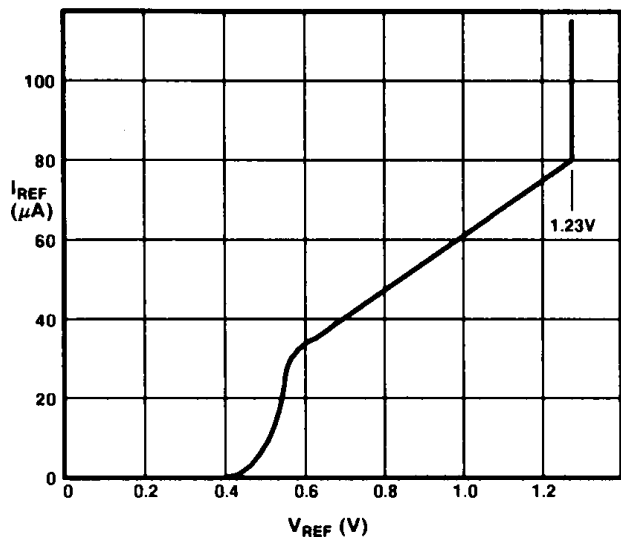


Fig.4 Typical reference characteristic

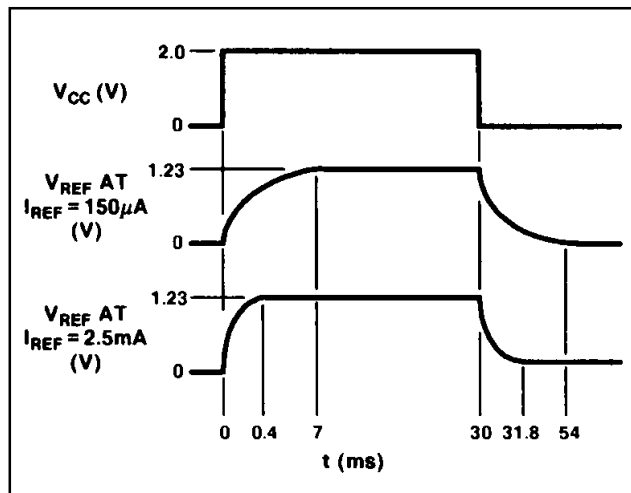


Fig.5 SR12D typical response time (not to scale)

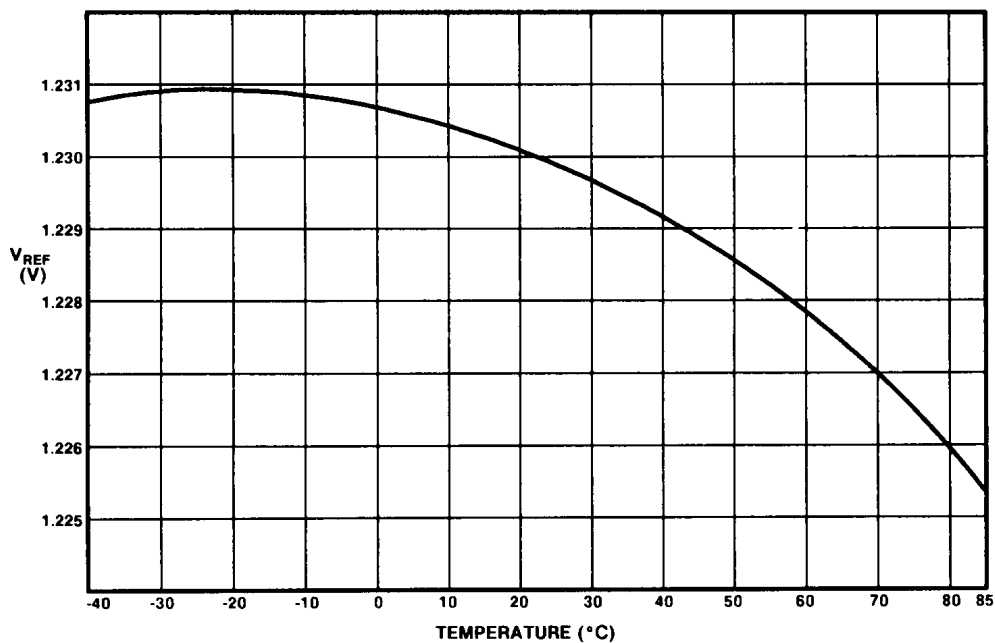


Fig.6 Typical temperature characteristic of SR12D at $I_{REF} = 150\mu\text{A}$

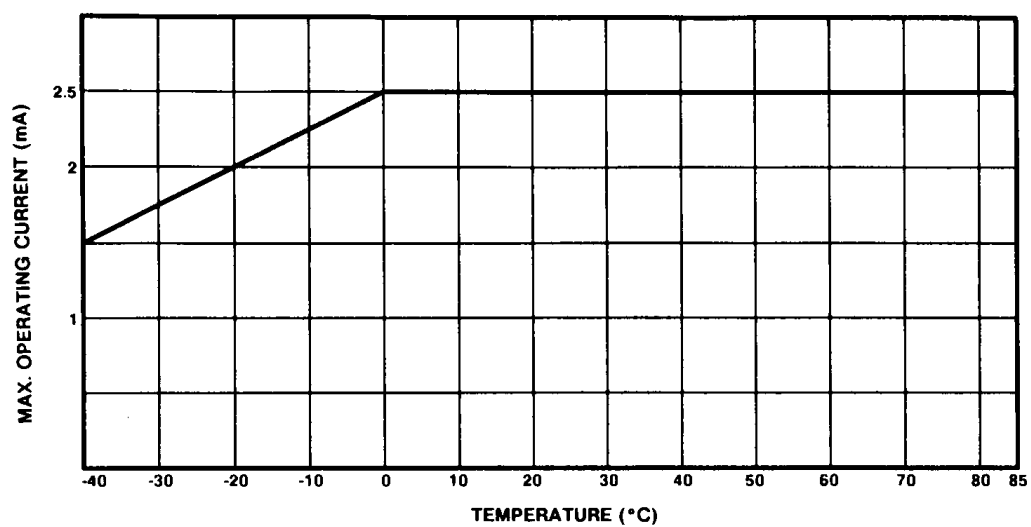


Fig.7 Derating curve



HEADQUARTERS OPERATIONS

GEC PLESSEY SEMICONDUCTORS

Cheney Manor, Swindon,
Wiltshire SN2 2QW, United Kingdom.
Tel: (0793) 518000
Fax: (0793) 518411

GEC PLESSEY SEMICONDUCTORS

P.O. Box 660017
1500 Green Hills Road,
Scotts Valley, California 95067-0017,
United States of America.
Tel: (408) 438 2900
Fax: (408) 438 5576

CUSTOMER SERVICE CENTRES

- **FRANCE & BENELUX** Les Ulis Cedex Tel: (1) 64 46 23 45 Fax : (1) 64 46 06 07
- **GERMANY** Munich Tel: (089) 3609 06-0 Fax : (089) 3609 06-55
- **ITALY** Milan Tel: (02) 66040867 Fax: (02) 66040993
- **JAPAN** Tokyo Tel: (03) 5276-5501 Fax: (03) 5276-5510
- **NORTH AMERICA Integrated Circuits and Microwave Products** Scotts Valley, USA
Tel (408) 438 2900 Fax: (408) 438 7023.
- **Hybrid Products**, Farmingdale, USA Tel (516) 293 8686 Fax: (516) 293 0061.
- **SOUTH EAST ASIA** Singapore Tel: (65) 3827708 Fax: (65) 3828872
- **SWEDEN** Stockholm, Tel: 46 8 702 97 70 Fax: 46 8 640 47 36
- **UK, EIRE, DENMARK, FINLAND & NORWAY**
Swindon Tel: (0793) 518510 Fax : (0793) 518582

These are supported by Agents and Distributors in major countries world-wide.

© GEC Plessey Semiconductors 1994 Publication No. DS2442 Issue No. 2.2 January 1994

This publication is issued to provide information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose nor form part of any order or contract nor to be regarded as a representation relating to the products or services concerned. No warranty or guarantee express or implied is made regarding the capability, performance or suitability of any product or service. The Company reserves the right to alter without prior knowledge the specification, design or price of any product or service. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date and has not been superseded. These products are not suitable for use in any medical products whose failure to perform may result in significant injury or death to the user. All products and materials are sold and services provided subject to the Company's conditions of sale, which are available on request.