



# SR3020 THRU SR3060 30 A Schottky Barrier Rectifiers


Voltage Range 20 to 60 Volts  
Current 30.0 Amperes

## Features

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability
- \* Epitaxial construction

## Mechanical Data

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Lead solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: As Marked
- \* Mounting position: Any
- \* Weight: 5.60 grams

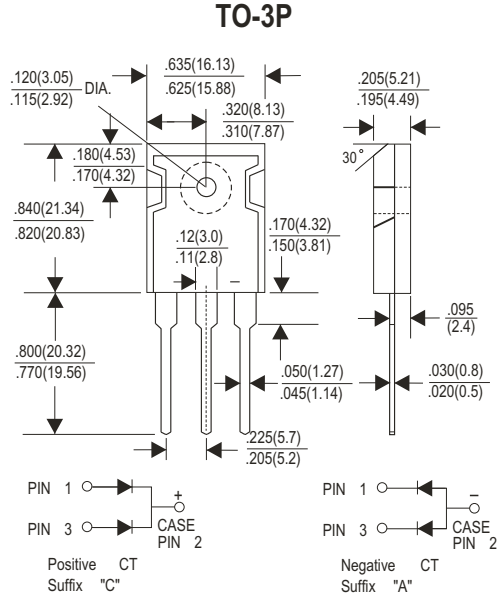

## Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

Type Number	SR3020	SR3030	SR3035	SR3040	SR3045	SR3050	SR3060	Units
Maximum Recurrent Peak Reverse Voltage	20	30	35	40	45	50	60	v
Maximum RMS Voltage	14	21	24	28	31	35	42	v
Maximum DC Blocking Voltage	20	30	35	40	45	50	60	v
Maximum Average Forward Rectified Current See Fig. 1	30							A
Peak Forward Surge Current, 8.3 ms Single Half Sinewave - Superimposed on Rated Load method (JEDEC)	250							A
Maximum Instantaneous Forward Voltage At 8.0A	0.65					0.75		V
Maximum D.C. Reverse Current @ T <sub>A</sub> =25°C	1.0							mA
At Rated DC Blocking Voltage @ T <sub>A</sub> =100°C	100							mA
Typical Thermal Resistance R <sub>θJA</sub> (Note 2)	1.4							°C/W
Operating Junction Temperature Range T <sub>J</sub>	-50+125							°C
Storage Temperature Range T <sub>STG</sub>	-65+150							°C

### Notes:

1. Measured at 1MHz and applied reverse voltage of 4.0Volts D.C.
2. Thermal Resistance Junction to Case

[Http://www.upm.com.tw](http://www.upm.com.tw)

E-mail: [upm.tw@msa.hinet.net](mailto:upm.tw@msa.hinet.net)



# SR3020 THRU SR3060 30 A Schottky Barrier Rectifiers

Voltage Range 20 to 60 Volts  
Current 30.0 Amperes

## RATING AND CHARACTERISTIC CURVES (SR3020 THRU SR3060)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

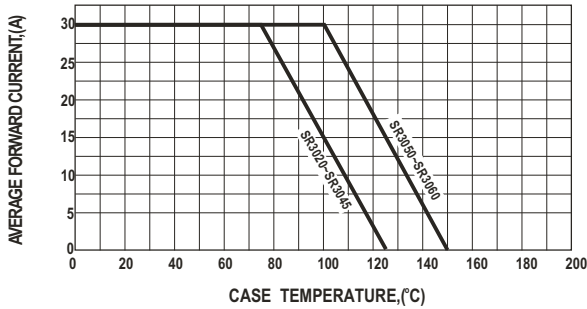


FIG.2-TYPICAL FORWARD CHARACTERISTICS

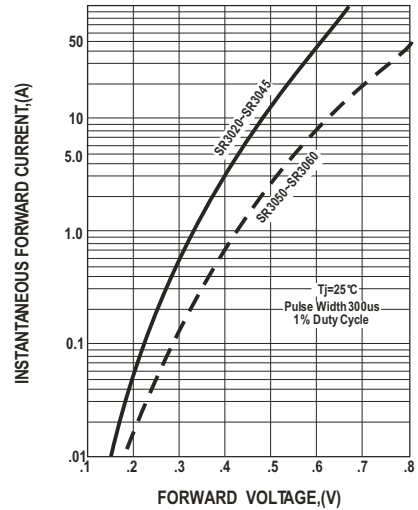


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

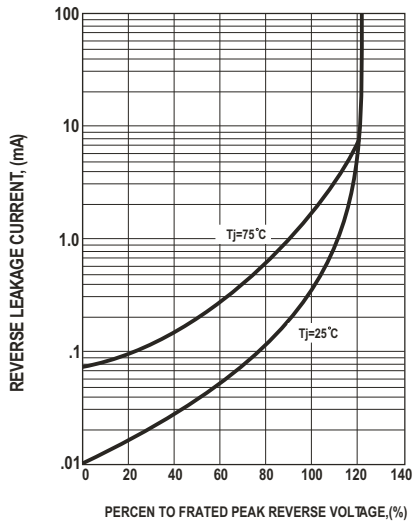


FIG.4-MAXIMUM NON-REPETITIVE FORWARDSURGE CURRENT

